



# FLORIDA STATEWIDE REGIONAL EVACUATION STUDY PROGRAM



## STORM TIDE ATLAS

## PASCO



### BOOK 3 OF 4 VOLUME 7-8

FLORIDA DIVISION OF  
EMERGENCY MANAGEMENT

TAMPA BAY REGIONAL  
PLANNING COUNCIL



**INCLUDES HURRICANE EVACUATION STUDY**

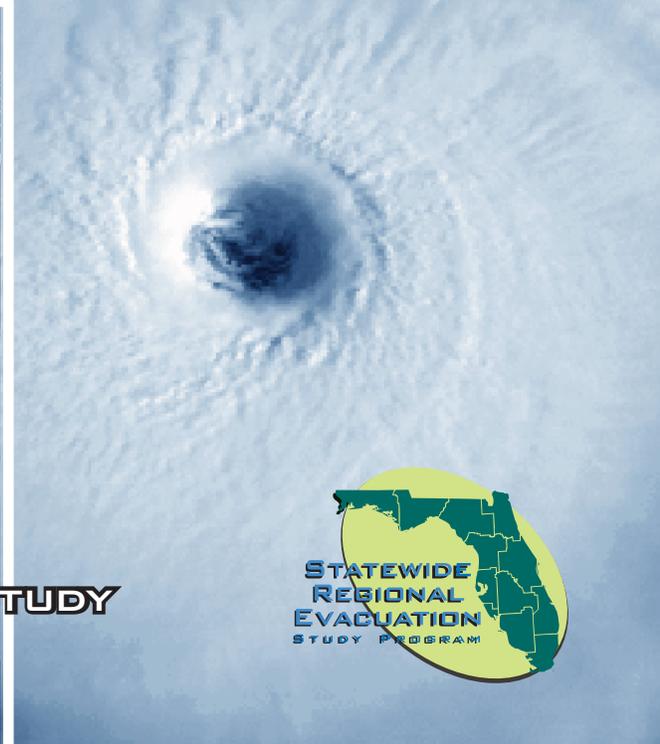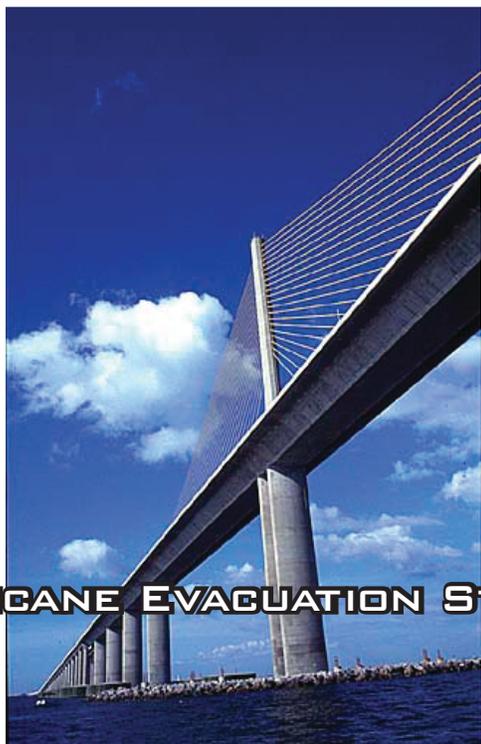



# TAMPA BAY STORM TIDE ATLAS

## Volume 7-8 Book 3 Pasco County

This Book is part of Volume 7 of the ***Statewide Regional Evacuation Study*** (SRES) Program and one of four county books in the Tampa Bay Storm Tide Atlas Series. Book 1 covers Hillsborough County; Book 2 covers Manatee County; Book 3 covers Pasco County and Book 4 covers Pinellas County. The Atlas maps identify those areas subject to potential storm surge flooding from the five categories of hurricane on the Saffir Simpson Hurricane Wind Scale as determined by NOAA's numerical storm surge model, SLOSH (updated 2009).


The Storm Tide Atlas, published in 2010, is the foundation of the hazards analysis for storm surge and a key component of the SRES. The Technical Data Report (Volume 1) builds upon this analysis and includes the revised evacuation zones and population estimates, results of the evacuation behavioral data, shelter analysis and evacuation transportation analyses. The Study, which provides vital information to state and local emergency management, forms the basis for county evacuation plans. The final documents with summary information will be published and made available on the Internet ([www.tbrpc.org](http://www.tbrpc.org)) in June 2010.

The Atlas was produced by the Tampa Bay Regional Planning Council with funding by the Florida Legislature and the Federal Emergency Management Agency through the Florida Division of Emergency Management.



*Tampa Bay Regional  
Planning Council*

This Atlas was prepared and published by the Tampa Bay Regional Planning Council,  
4000 Gateway Centre Blvd., Suite 100, Pinellas Park, FL 33782. Telephone: (727) 570-5151  
Fax: (727) 570-5118: Email: [betty@tbrpc.org](mailto:betty@tbrpc.org) or [marsh@tbrpc.org](mailto:marsh@tbrpc.org) or [brady@tbrpc.org](mailto:brady@tbrpc.org)  
Web site: [www.tbrpc.org](http://www.tbrpc.org)

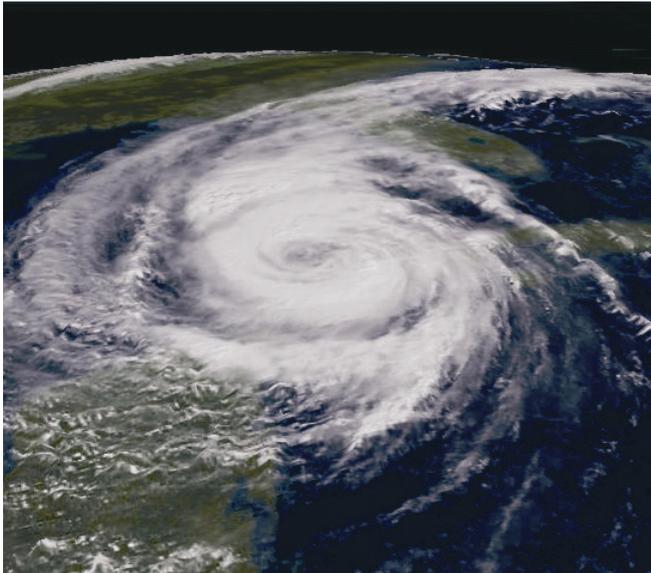

# VOLUME 7-8 TAMPA BAY STORM TIDE ATLAS

## TABLE OF CONTENTS

### Book 3 Pasco County

INTRODUCTION .....	5
THE SLOSH MODEL.....	5
Hypothetical Storm Simulations .....	6
The Grid for the Tampa Bay SLOSH Model .....	9
Storm Scenario Determinations.....	9
CREATION OF THE STORM TIDE ZONES .....	11
Determining Storm Surge Height and Flooding Depth .....	11
Storm Surge Post-Processing.....	12
VARIATIONS TO CONSIDER .....	14
Storm Surge & Wave Height.....	14
Forward Speed .....	14
Radius of Maximum Winds .....	14
Astronomical Tides .....	14
Accuracy .....	15
POINTS OF REFERENCE .....	15
STORM TIDE ATLAS.....	20

### LIST OF TABLES


Table 1	Saffir-Simpson Hurricane Wind Scale .....	7
Table 2	Tampa Bay Basin Hypothetical Storm Parameters.....	8
Table 3	Potential Storm Tide Height (s) by County .....	10
Table 4	Selected Points of Reference .....	16

**LIST OF FIGURES**

Figure 1 The Tampa Bay Region .....	5
Figure 2 Tampa Bay Basin Grid .....	9
Figure 3 SLOSH Grid with Surge Values.....	9
Figure 4 Digital Elevation from LIDAR.....	11
Figure 5 SLOSH Display .....	12
Figure 6 SLOSH Display Post-Processing.....	12
Figure 7 Storm Tide Limits for the Tampa Bay Region .....	13
Figure 8 Map Plate Index.....	21

**LIST OF MAPS**

Map 2 .....	23
Map 3 .....	24
Map 4 .....	25
Map 5 .....	26
Map 6 .....	27
Map 8 .....	28
Map 21.....	29
Map 22.....	30
Map 23.....	31
Map 24.....	32
Map 38.....	33
Map 39.....	34
Map 40.....	35
Map 41.....	36
Map 42.....	37
Map 57.....	38
Map 58.....	39
Map 59.....	40
Map 60.....	41
Map 75.....	42
Map 76.....	43
Map 77.....	44
Map 78.....	45
Map 93.....	46
Map 94.....	47
Map 95.....	48
Map 96.....	49
Map 110 .....	50
Map 111 .....	51
Map 112 .....	52

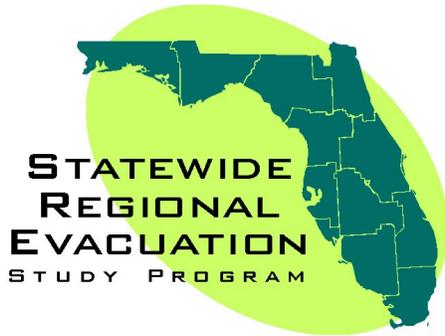

## CREDITS & ACKNOWLEDGEMENTS

Funding was authorized by the Florida Legislature through House Bill 7121, as a result of the 2004 and 2005 hurricane seasons. Provisions of this bill require the Division of Emergency Management to update all Regional Evacuation Studies in the State and inexorably tied the Evacuation Studies and Growth Management. As a result, this study addresses both Emergency Management and Growth Management data needs. Funds were also provided by the Federal Emergency Management Agency (FEMA) with all money administered through the Florida Division of Emergency Management (FDEM), 2555 Shumard Oak Blvd., Tallahassee, 32399. Web site: [www.floridadisaster.org](http://www.floridadisaster.org).

Local match was provided by the counties of Hillsborough, Manatee, Pasco and Pinellas.

The Council acknowledges and extends its appreciation to the following agencies and people for their cooperation and assistance in the development of this document:

**National Oceanic and Atmospheric Administration (NOAA/TPC-NHC)** for the SLOSH numerical storm surge model developed by the late Chester L. Jelesnianski, the development of the 2009 Tampa Bay Basin under the management of Jamie Rhome, and for the storm tide computation and interpretation provided by the NOAA Storm Surge Modeling team. The National Weather Service, Ruskin office for their coordination and support.

### Florida Division of Emergency Management

David Halstead, Director  
Sandy Meyer, Hurricane Program Manager  
Richard Butgereit, GIS Manager

### Northeast Florida Regional Council

Jeffrey Alexander, Statewide Program Manager

### Florida Emergency Preparedness Association

For their support in this statewide effort

### County Emergency Management Agencies

Larry Gispert, Director, Hillsborough County  
Emergency Management  
Jim Martin, Director, Pasco County Emergency  
Management  
Sally Bishop, Director, Pinellas County Emergency  
Management  
Laurie Feagans, Director, Manatee County  
Emergency Management



## INTRODUCTION

A comprehensive emergency management program requires attention to four (4) key inter-related components: preparedness, response, recovery and mitigation. Preparing and avoiding or reducing potential loss of life and property damage - **preparedness and mitigation** - requires accurate and precise hazard and vulnerability analyses. These analyses are the foundation for evacuation and disaster response planning, as well as the development of local mitigation strategies designed to reduce the community's overall risk to disasters. This Atlas series provides information to state, county and local emergency management officials and planners for use in hurricane preparedness and coastal management in the Tampa Bay Region including Hillsborough, Manatee, Pasco and Pinellas counties (Figure 1). It was part of a statewide effort to enhance our ability to respond to a hurricane threat, facilitate the evacuation of vulnerable residents to a point of relative safety and mitigate our vulnerability in the future. The ***Statewide Regional Evacuation Study Program*** provides a consistent, coordinated and improved approach to addressing the state and regional vulnerability to the hurricane threat.

The specific purpose of this Atlas is to provide maps which depict storm tide heights and the extent of stillwater, storm surge coastal flooding inundation from hurricanes of five different intensities in the Tampa Bay area. The Atlas was prepared by the Tampa Bay Regional Planning Council as part of the *Statewide Regional Evacuation Study Program*. The Study is a cooperative effort of the Florida Department of Community Affairs, Division of Emergency Management, the Florida Regional Planning Councils and the county emergency management agencies.


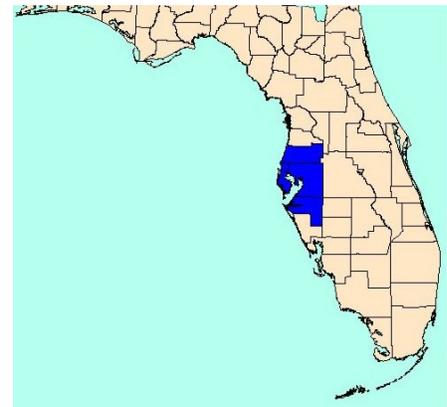


Figure 1 The Tampa Bay Region

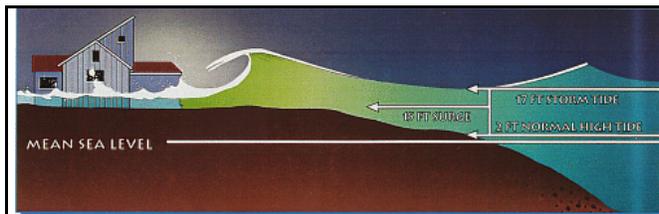

## THE SLOSH MODEL

The principal tool utilized in this study for analyzing the expected hazards from potential hurricanes affecting the study area is the Sea, Lake and Overland Surges from Hurricane (**SLOSH**) numerical storm surge prediction model. The SLOSH computerized model predicts the storm surge heights that result from hypothetical hurricanes with selected various combinations of pressure, size, forward speed, track and winds. Originally developed for use by the National Hurricane Center (NHC) as a tool to give geographically specific warnings of expected surge heights during the approach of hurricanes, the SLOSH model is utilized in regional studies for several key hazard and vulnerability analyses.

The SLOSH modeling system consists of the model source code and the model basin or grid. SLOSH model grids must be developed for each specific geographic coastal area individually incorporating the unique local bay and river configuration, water depths, bridges, roads and other physical features. In addition to open coastline heights, one of the most valuable outputs of the SLOSH model for evacuation planning is its predictions of surge heights over land into inland areas.

The first Tampa Bay SLOSH model basin was completed in 1979 and represented the first application of SLOSH storm surge dynamics to a major coastal area of the United States. The model was developed by the Techniques Development Lab of the National Oceanic and Atmospheric Administration (NOAA) under the direction of the late Dr. Chester P. Jelesnianski. In December 1990 the National Hurricane Center updated the SLOSH model for the Tampa Bay basin. A major improvement to the model was the incorporation of wind speed degradation overland as the simulated storms moved inland. This duplicated the pressure "filling" and increases in the radii of maximum winds (RMW) as the hurricanes weaken after making landfall. The grid configuration also provided more detail and additional information including storm surge projections for northern Pasco County (not included in the 1979 basin).

The newest generation of the SLOSH model basin incorporated in the 2010 Statewide Regional Evacuation Study reflects major improvements, including higher resolution basin data and grid configurations. Faster computer speeds allowed additional hypothetical storms to be run for creation of the MOMs<sup>1</sup> or the maximum potential storm surge values for each category of storm.

## Hypothetical Storm Simulations

Surge height depends strongly on the specifics of a given storm including, forward speed, angle of approach, intensity or maximum wind speed, storm size, storm shape, and landfall location. The SLOSH model was used to develop data for various combinations of hurricane strength, wind speed, and direction of movement. Storm strength was modeled using the central pressure (defined as the difference between the ambient sea level pressure and the minimum value in the storm's center), the storm eye size and the radius of maximum winds using the five categories of hurricane intensity as depicted in the Saffir-Simpson Hurricane Wind Scale (see Table 1).

---

<sup>1</sup> Maximum of MEOWs or Maximum of Maximums

**Table 1 Saffir-Simpson Hurricane Wind Scale**

Category	Wind Speeds	Potential Damage
Category 1	(Sustained winds 74-95 mph)	<i>Very dangerous winds will produce some damage</i>
Category 2	(Sustained winds 96-110 mph)	<i>Extremely dangerous winds will cause extensive damage</i>
Category 3	(Sustained winds 111-130 mph )	<i>Devastating damage will occur</i>
Category 4	(Sustained winds 131-155 mph)	<i>Catastrophic damage will occur</i>
Category 5	(Sustained winds of 156 mph and above)	<i>Catastrophic damage will occur</i>

The modeling for each tropical storm/hurricane category was conducted using the mid-range pressure difference ( $\Delta p$ , millibars) for that category. The model also simulates the storm filling (weakening upon landfall) and radius of maximum winds (RMW) increase.

Ten storm track headings (WSW, W, WNW, NW, NNW, N, NNE, NE, E, ENE) were selected as being representative of storm behavior in the West Central Florida regions, based on observations by forecasters at the National Hurricane Center. And for each set of tracks in a specific direction storms were run at forward speeds of 5, 10, 15 and 25 mph. And, for each direction, at each speed, storms were run at two different sizes (20 statute mile radius of maximum winds and 35 statute miles radius of maximum winds.) Finally, each scenario was run at both mean tide and high tide. Both tide levels are now referenced to North American Vertical Datum of 1988 (NAVD88) as opposed to the National Geodetic Vertical Datum of 1929 (NGVD29) used in the previous study.

A total of 12,000 runs (compared to the 735 runs in 2006) were made consisting of the different parameters shown in Table 2.

**Table 2 Tampa Bay Basin Hypothetical Storm Parameters**

Directions, speeds, (Saffir/Simpson) intensities, number of tracks and the number of runs.

Direction	Speeds (mph)	Size (Radius of Maximum winds)	Intensity	Tides	Tracks	Runs
WSW	5,10,15, 25 mph	20 statute miles; 35 statute miles	1 through 5	Mean/High	18	1440
W	5,10,15, 25 mph	20 statute miles; 35 statute miles	1 through 5	Mean/High	14	1120
WNW	5,10,15, 25 mph	20 statute miles; 35 statute miles	1 through 5	Mean/High	16	1280
NW	5,10,15, 25 mph	20 statute miles; 35 statute miles	1 through 5	Mean/High	14	1120
NNW	5,10,15, 25 mph	20 statute miles; 35 statute miles	1 through 5	Mean/High	14	1120
N	5,10,15, 25 mph	20 statute miles; 35 statute miles	1 through 5	Mean/High	10	800
NNE	5,10,15, 25 mph	20 statute miles; 35 statute miles	1 through 5	Mean/High	13	1040
NE	5,10,15, 25 mph	20 statute miles; 35 statute miles	1 through 5	Mean/High	17	1360
ENE	5,10,15, 25 mph	20 statute miles; 35 statute miles	1 through 5	Mean/High	17	1360
E	5,10,15, 25 mph	20 statute miles; 35 statute miles	1 through 5	Mean/High	17	1360
TOTAL						12,000

## The Grid for the Tampa Bay SLOSH Model

Figure 2 illustrates the area covered by the grid for the Tampa Bay SLOSH Model. To determine the surge values the SLOSH model uses a telescoping elliptical grid as its unit of analysis with 188 arc lengths ( $1 < I > 188$ ) and 215 radials ( $1 < J > 215$ ). Use of the grid configuration allows for individual calculations per grid square which is beneficial in two ways: (1) provides increased resolution of the storm surge at the coastline and inside the harbors, bays and rivers, while decreasing the resolution in the deep water where detail is not as important; and (2) allows economy in computation.

The grid size for the Tampa Bay model varies from approximately 0.03 square miles or 19 acres closest to the pole ( $I = 1$ ) to the grids on the outer edges (Gulf of Mexico) where each grid is approximately 1.5 square miles.

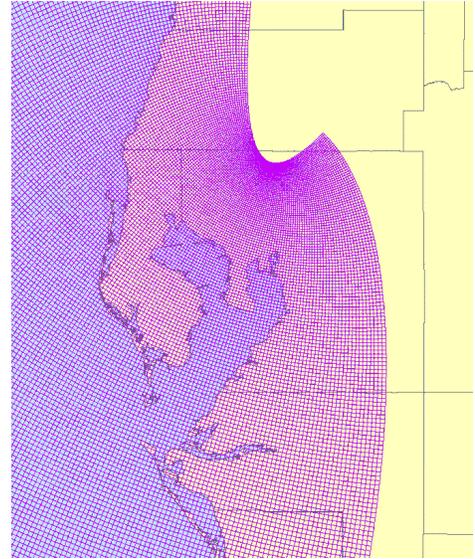


Figure 2 Tampa Bay Basin Grid

## Storm Scenario Determinations

As indicated, the SLOSH model is the basis for the "hazard analysis" portion of coastal hurricane evacuation plans. Thousands of hypothetical hurricanes are simulated with various Saffir-Simpson Wind categories, forward speeds, landfall directions, and landfall locations. An envelope of high water containing the maximum value a grid cell attains is generated at the end of each model run. These envelopes are combined by the NHC into various composites which depict the possible flooding. One useful composite is the MEOW (Maximum

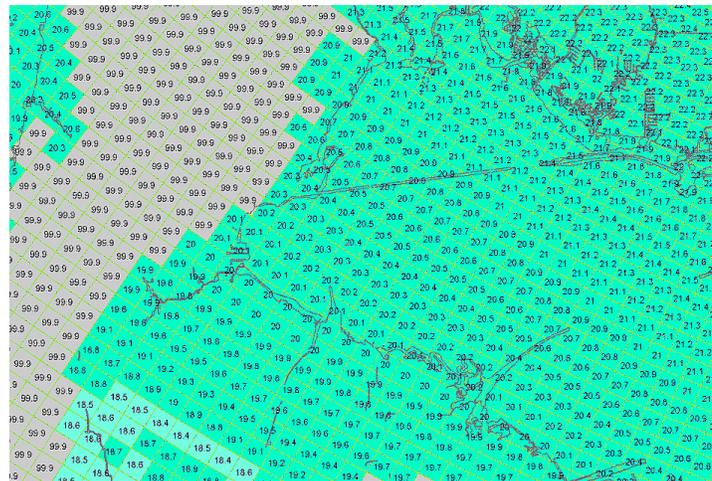


Figure 3 SLOSH Grid with Surge Values

Envelopes of Water) which incorporates all the envelopes for a particular category, speed, and landfall direction. Once surge heights have been determined for the appropriate grids, the maximum surge heights are plotted by storm track and tropical storm/hurricane category. These plots of maximum surge heights for a given storm category and track are referred to as Maximum Envelopes of Water (MEOWs). The MEOWs or Reference Hurricanes can be used in evacuation decision making when and if sufficient forecast information is available to project storm track or type of storm (different landfalling, paralleling, or exiting storms).

The MEOWs provide information to the emergency managers in evacuation decision making. However, in order to determine a scenario which may confront the county in a hurricane threat 24-48 hours before a storm is expected, a further compositing of the MEOWs into Maximums of the Maximums (MOMs) is usually required.

The MOM (Maximum of the MEOWs) combines all the MEOWs of a particular category. The MOMs represent the maximum surge expected to occur at any given location, regardless of the specific storm track/direction of the hurricane. The only variable is the intensity of the hurricane represented by category strength (Category 1-5).

The MOM surge heights, which were furnished by the National Hurricane Center, have 2 values, mean tide and high tide. Mean tide has 0' tide correction. High tide has a 1' tide correction added to it. The Storm Tide limits include the adjustment for mean high tide. All elevations are now referenced to the NAVD88 datum.

These surge heights were provided within the SLOSH grid system as illustrated on Figure 2. The range of maximum surge heights (low to high) for each scenario is provided for each category of storm (MOM) on Table 3. **It should be noted again that these surge heights represent the maximum surge height recorded in the county from the storm tide analysis including inland and back bay areas where the surge can be magnified dependent upon storm parameters.**

**Table 3 Potential Storm Tide Height (s) by County**

(In Feet above NAVD88)

*Storm Strength	Hillsborough	Manatee	Pasco	Pinellas
Category 1	Up to 8'	Up to 6'	Up to 9'	Up to 8'
Category 2	Up to 15'	Up to 12'	Up to 15'	Up to 14'
Category 3	Up to 21'	Up to 16'	Up to 21'	Up to 19'
Category 4	Up to 29'	Up to 22'	Up to 27'	Up to 26'
Category 5	Up to 33'	Up to 28'	Up to 34'	Up to 29'

*\* Based on the category of storm on the Saffir-Simpson Hurricane Wind Scale*

*\*\* Surge heights represent the maximum values from SLOSH MOMs*

## CREATION OF THE STORM TIDE ZONES


The maps in this atlas depict SLOSH-modeled heights of storm surge and extent of flood inundation for hurricanes of five different intensities. As indicate above, the storm surge was modeled using the Maximum of Maximums (MOMs) representing the potential flooding from the five categories of storm intensity of the Saffir/Simpson Hurricane Wind Scale.

### Determining Storm Surge Height and Flooding Depth

SLOSH and SLOSH-related products reference storm surge heights relative to the model vertical datum, NAVD88. In order to determine the inundation depth of surge flooding at a particular location the ground elevation (relative to NAVD88) at that location must be subtracted from the potential surge height.<sup>2</sup>

Surge elevation, or water height, is the output of the SLOSH model. At each SLOSH grid point, the maximum surge height is computed at that point.

Within the SLOSH model an average elevation is assumed within each grid square. Height of water above terrain was not calculated using the SLOSH average grid elevation because terrain height may vary significantly within a SLOSH grid square. For example, the altitude of a 1-mile grid square may be assigned a value of 1.8 meters (6 feet), but this value represents an average of land heights that may

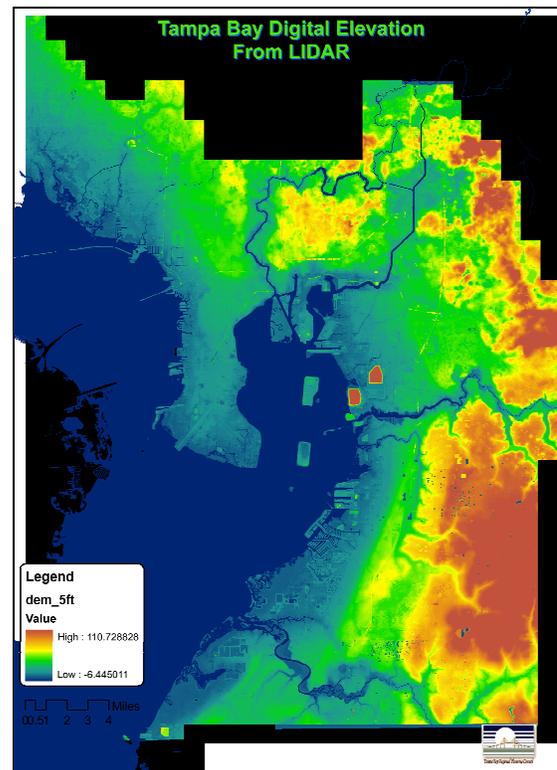

**Figure 4 Digital Elevation from LIDAR**


include values ranging from 0.9 to 2.7 meters (3 to 9 feet). In this case, a surge value of 2.5 meters (8 feet) in this square would imply a 0.7 meters (2 feet) average depth of water over the grid's terrain. However, in reality within the grid area portion of the grid would be "dry" and other parts could experience as much as 1.5 meters (5 feet) of inundation. Therefore, in order to determine the storm tide limits, the depth of surge flooding above terrain at a specific site in the grid square is the result of subtracting the terrain height determined by remote sensing from the model-generated storm surge height in that grid square.<sup>3</sup>

<sup>2</sup> It is important to note that one must use a consistent vertical datum when post-processing SLOSH storm surge values

<sup>3</sup> Note: This represents the regional post-processing procedure. When users view SLOSH output within

## Storm Surge Post-Processing

The Atlas was created using a Toolset wrapped into ESRI's ArcGIS mapping application, ArcMap. The surge tool was developed for the Statewide Regional Evacuation Study Program by the Tampa Bay Regional Planning Council, who had used a similar tool for the previous Evacuation Study Update (2006). This tool enabled all regions within the state of Florida to process the SLOSH and elevation data with a consistent methodology.

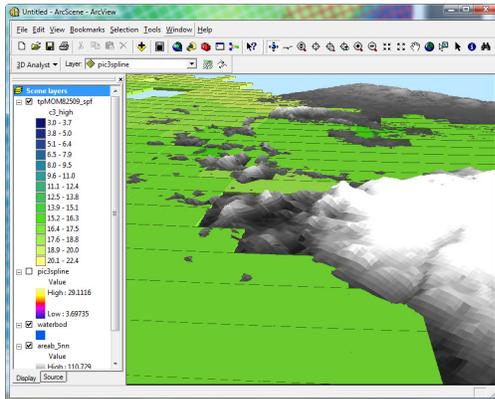

The tool basically performs the operation of translating the lower resolution SLOSH grid data into a smooth surface resembling actual storm surge and terrain; processing it with the high resolution elevation data derived from LIDAR. The image on the left represents how the data would look as it appears directly from SLOSH Model output.


Processing all the data in the raster realm, the tool is able to digest large amounts of data and output detailed representations of surge inundation.

**Figure 5 SLOSH Display**

The program first interpolates the SLOSH height values for each category into a raster surface using spline interpolation. This type of interpolation is best for smooth surfaces, such as water and slow changing terrain. The result is a raster surface representing the surge height for a category that can be processed against the raster Digital Elevation Model from the LIDAR. The "dry" values (represented as 99.9 in the SLOSH Model) are replaced by an average of the inundated grids surrounding current processed grid. An algorithm performs this action utilizing the range of values in the current category of storm being processed.

Using this methodology, once the elevation is subtracted from the projected storm surge, the storm tide limits are determined. The output of the tool is a merged polygon file holding all the maximum inundation zones for Category 1 through Category 5. The output, depicted in this Storm Tide Atlas is determined consistent with the coastal areas throughout the state.


Figure 7 presents a compilation of the *Storm Tide Atlas* for the region.

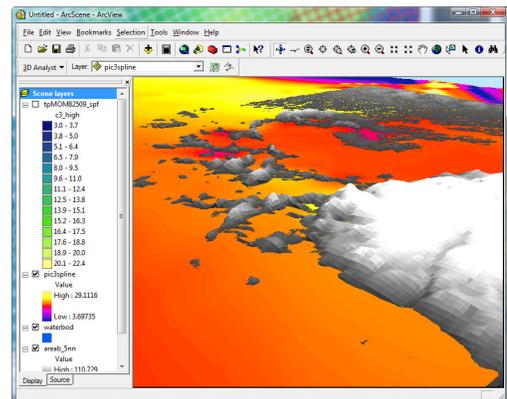

**Figure 6 SLOSH Display Post-Processing**

the SLOSH Display Program, the system still uses average grid cell height when subtracting land.

**Figure 7 Storm Tide Limits for the Tampa Bay Region**

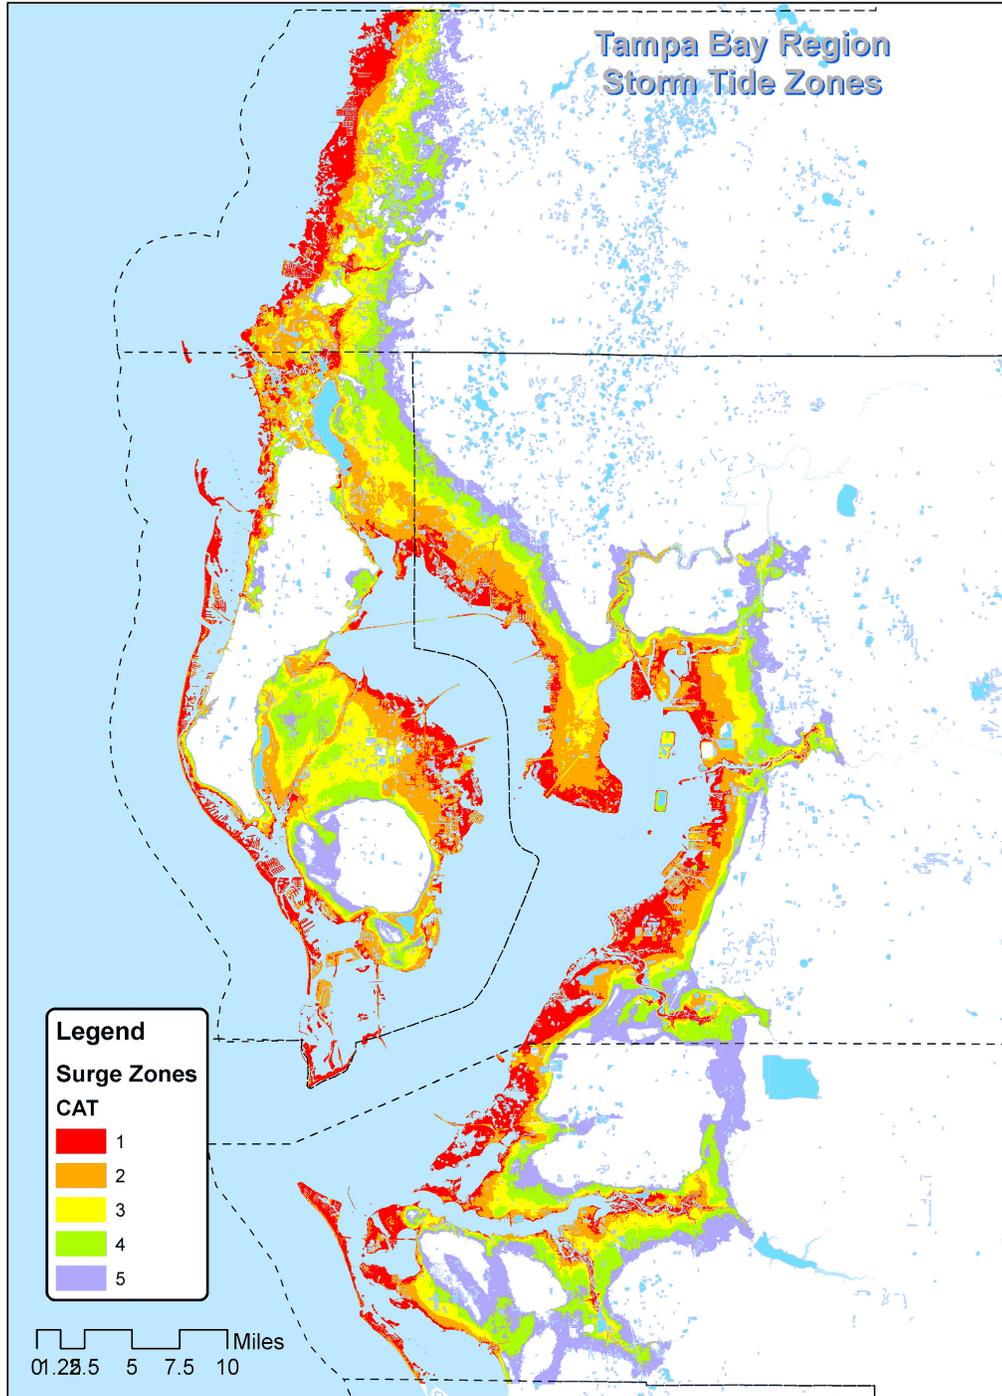

## VARIATIONS TO CONSIDER

Variations between modeled versus actual measured storm surge elevations are typical of current technology in coastal storm surge modeling. In interpreting the data emergency planners should recognize the uncertainties characteristic of mathematical models and severe weather systems such as hurricanes. The storm surge elevations developed for this study and presented in the *Storm Tide Atlas* should be used as guideline information for planning purposes.

### Storm Surge & Wave Height

Regarding interpretation of the data, it is important to understand that the configuration and depth (bathymetry) of the Gulf bottom will have a bearing on surge and wave heights. A narrow shelf, or one that drops steeply from the shoreline and subsequently produces deep water in close proximity to the shoreline, tends to produce a lower surge but a higher and more powerful wave. Those regions, like the Tampa Bay Region, which have a gently sloping shelf and shallower normal water depths, can expect a higher surge but smaller waves. The reason this occurs is because a surge in deeper water can be dispersed down and out away from the hurricane. However, once that surge reaches a shallow gently sloping shelf it can no longer be dispersed away from the hurricane, consequently water “piles up” as it is driven ashore by the wind stresses of the hurricane. Wave height is NOT calculated by the SLOSH model and is not reflected within the storm tide delineations.

### Forward Speed

Under actual storm conditions it may be expected that a hurricane moving at a slower speed could have higher coastal storm surges than those depicted from model results. At the same time, a fast moving hurricane would have less time to move storm surge water up river courses to more inland areas. For example, a minimal hurricane or a storm further off the coast such as Hurricane Elena (1985), which stalled 90 miles off the Tampa Bay coast for several tidal cycles, could cause extensive beach erosion and move large quantities of water into interior lowland areas. In the newest version of the Tampa Bay SLOSH model, for each set of tracks in a specific direction, storms were run at forward speeds of 5, 10, 15 and 25 mph.

### Radius of Maximum Winds

As indicated previously, the size of the storm or radius of maximum winds (RMW) can have a significant impact on storm surge especially in bay areas and along the Gulf of Mexico. All of the hypothetical storms were run at two different sizes, 25 mile radius of maximum winds and 30 mile radius of maximum winds.

### Astronomical Tides

Surge heights were provided by NOAA for both mean tide and high tide. Both tide levels are referenced to North American Vertical Datum of 1988. The storm tide limits reflect high tide in the region.

## Accuracy

As part of the Statewide Regional Evacuation Study, all coastal areas as well as areas surrounding Lake Okeechobee were mapped using remote-sensing laser terrain mapping (LIDAR<sup>4</sup>) providing the most comprehensive, accurate and precise topographic data for this analysis. As a general rule, the vertical accuracy of the laser mapping is within a 15 centimeter tolerance. However, it should be noted that the accuracy of these elevations is limited to the precision and tolerance in which the horizontal accuracy for any given point is recorded. Other factors such as artifact removal algorithms (that remove buildings and trees) can affect the recorded elevation in a particular location. For the purposes of this study, the horizontal accuracy cannot be assumed to be greater than that of a standard USGS 7 minute quadrangle map, or a scale of 1:24,000.

## POINTS OF REFERENCE

County emergency management agencies selected reference points which include key facilities or locations critical for emergency operations. The table below includes the map identification number, descriptions of the selected points and the elevation of the site. The elevation is based on the digital elevation data provided by the LIDAR. It should be noted that if the site is large, elevations may vary significantly. The table also provides the storm surge value from the SLOSH value and the depth of inundation (storm surge value minus the ground elevation) at the site.

---

4 Light Imaging Detection and Ranging

MAP ID	NAME	Elevation	C1 DPTH <sup>5</sup>	C2 DPTH	C3 DPTH	C4 DPTH	C5 DPTH	C1 SURGE <sup>6</sup>	C2 SURGE	C3 SURGE	C4 SURGE	C5 SURGE
36	EMS, NEW PORT RICHEY FIRE STATION 1	11.2	0.0	1.5	7.6	12.4	16.2	7.0	12.6	18.8	23.6	27.4
37	EMS, NEW PORT RICHEY FIRE STATION 2	21.8	0.0	0.0	0.0	1.8	5.7	9.1	14.4	18.8	23.6	27.5
38	EMS, STATION #10, FIRE/RESCUE	5.5	2.8	9.4	14.7	19.2	23.3	8.3	14.9	20.2	24.6	28.7
39	EMS, STATION #11, FIRE/RESCUE	14.5	0.0	0.4	5.3	9.6	13.4	6.3	14.8	19.8	24.1	27.9
40	EMS, STATION #12, FIRE/RESCUE	15.1	0.0	0.0	3.4	7.3	11.1	5.8	12.3	18.5	22.4	26.2
41	EMS, STATION #14, FIRE/RESCUE	39.5	0.0	0.0	0.0	0.0	0.0	5.8	11.1	15.5	19.5	28.2
42	EMS, STATION #15, FIRE/RESCUE	52.1	0.0	0.0	0.0	0.0	0.0	5.8	11.1	15.5	19.5	23.2
43	EMS, STATION #17, FIRE/RESCUE	18.7	0.0	0.0	1.0	5.3	9.1	5.8	11.2	19.7	23.9	27.8
44	EMS, STATION #19, FIRE/RESCUE	4.8	3.6	9.4	13.8	18.6	22.4	8.4	14.2	18.6	23.4	27.2
45	EMS, STATION #20, FIRE/RESCUE	48.4	0.0	0.0	0.0	0.0	0.0	5.8	11.1	15.5	19.5	29.6
46	EMS, STATION #21, FIRE/RESCUE	25.5	0.0	0.0	0.0	1.0	6.0	5.8	11.1	15.5	26.5	31.5
47	EMS, STATION #29, FIRE/RESCUE	16.1	0.0	0.0	3.3	8.6	12.3	5.8	11.6	19.3	24.7	28.4
48	EMS, STATION #35, FIRE/RESCUE	13.9	0.0	0.5	6.0	10.3	14.1	6.2	14.4	19.8	24.1	27.9
49	EMS, PORT RICHEY FIRE STATION	9.7	0.0	4.7	9.3	13.9	17.8	8.6	14.5	19.0	23.7	27.5
50	EMS, STATION #39, FIRE/RESCUE	26.1	0.0	0.0	0.0	0.7	4.4	5.8	11.5	18.5	26.8	30.4
51	PASCO SHERIFF, WEST OPERATIONS	23.0	0.0	0.0	0.0	0.8	5.8	5.8	11.1	15.9	23.8	28.8
52	PASCO SHERIFF, WEST JAIL	32.9	0.0	0.0	0.0	0.0	0.0	5.8	11.1	15.6	24.0	28.6
53	POLICE, NEW PORT RICHEY	14.2	0.0	0.1	4.6	9.4	13.2	8.4	14.3	18.8	23.6	27.4
54	POLICE, PORT RICHEY	19.6	0.0	0.0	0.0	4.2	8.0	6.4	13.9	19.2	23.9	27.7
55	PASCO COUNTY GOVERNMENT CENTER	25.5	0.0	0.0	0.0	0.0	3.2	5.8	11.1	15.8	24.2	28.7
56	PASCO COUNTY HEALTH DEPARTMENT BUILDING	24.4	0.0	0.0	0.0	1.2	5.0	5.8	11.1	16.9	25.6	29.4
57	FLEET MAINTENANCE (FOX HOLLOW)	25.4	0.0	0.0	0.0	0.0	3.6	5.8	11.1	17.3	24.8	28.9
58	PASCO COUNTY SUNSET BUILDING	6.8	1.8	7.6	12.1	16.8	20.6	8.5	14.3	18.8	23.5	27.3
59	PASCO HERNANDO COMMUNITY COLLEGE	27.9	0.0	0.0	0.0	0.0	3.8	5.8	11.1	15.5	19.7	31.7
60	NORTH BAY MEDICAL CENTER	20.0	0.0	0.0	0.0	3.6	7.4	7.4	13.0	18.8	23.6	27.4

<sup>5</sup> DPTH refers to the depth of inundation at the site (storm surge value minus the ground elevation)

<sup>6</sup> SURGE refers to the storm surge value from the SLOSH Model

MAP ID	NAME	Elevation	C1 DPTH <sup>5</sup>	C2 DPTH	C3 DPTH	C4 DPTH	C5 DPTH	C1 SURGE <sup>6</sup>	C2 SURGE	C3 SURGE	C4 SURGE	C5 SURGE
61	COMMUNITY HOSPITAL NEW PORT RICHEY	11.0	0.0	2.0	7.8	12.5	16.3	7.2	12.9	18.8	23.5	27.3
62	REGIONAL MEDICAL CENTER AT BAYONET POINT	9.0	0.0	5.8	11.1	15.3	19.5	8.0	14.8	20.1	24.3	28.5
63	CARES ADULT DAY CARE CENTER MCSWEENEY ADULT FAMILY CARE HOME	34.6	0.0	0.0	0.0	0.0	0.0	5.8	11.1	15.5	19.5	28.7
64	ARTHUR IVES AFCH	17.6	0.0	0.0	1.0	5.0	8.9	6.2	12.6	18.7	22.7	26.5
65	FAMILY RETREAT	16.7	0.0	0.0	4.2	9.2	13.1	5.8	11.9	20.9	25.9	29.8
66	SUNSHINE CHRISTIAN HOME	10.2	0.0	2.4	8.5	12.5	16.4	6.0	12.6	18.6	22.7	26.5
67	RETREAT RETIREMENT RESORT	13.4	0.0	0.0	5.2	9.3	13.1	5.8	12.4	18.6	22.7	26.5
68	PLANTATION RETIREMENT	15.3	0.0	0.0	3.3	7.3	11.2	5.9	12.6	18.6	22.6	26.4
69	GREEN ACRES WINDSOR WOODS RETIREMENT CENTER	8.7	0.0	3.9	10.0	14.0	17.8	6.2	12.6	18.7	22.7	26.6
70	WEST PASCO RETIREMENT CENTER	29.8	0.0	0.0	0.0	0.0	0.0	5.8	11.5	18.6	25.4	29.4
71	SULLIVAN HOUSE	20.1	0.0	0.0	0.1	4.5	8.6	6.0	12.1	20.1	24.6	28.7
72	HUDSON HOUSE	4.5	3.8	10.1	15.5	19.7	23.9	8.3	14.6	19.9	24.2	28.4
73	OLIVE BRANCH	31.9	0.0	0.0	0.0	0.0	0.0	5.8	11.1	17.0	24.1	29.9
74	BRAYBROOK ALF	34.5	0.0	0.0	0.0	0.0	0.0	5.8	11.1	15.5	19.4	30.2
75	BAYPOINT VILLAGE	7.6	0.6	7.5	12.8	17.4	21.4	8.2	15.1	20.4	25.0	29.0
76	MARYLAND MANOR	12.1	0.0	2.7	8.0	12.0	16.2	7.1	14.8	20.1	24.1	28.3
77	GOLDEN SUNSET	20.6	0.0	0.0	0.0	4.1	8.1	5.8	11.4	18.2	24.7	28.7
78	GOLDEN SUNSET II	6.2	2.1	8.5	13.8	18.3	22.4	8.3	14.7	20.0	24.5	28.6
79	WESTBURY HOUSE	9.1	0.0	5.2	9.7	14.4	18.2	8.5	14.3	18.8	23.5	27.3
80	BEL-AIRE HOUSE	8.6	0.0	5.3	10.2	15.1	19.0	8.1	14.0	18.8	23.7	27.6
81	NEW PORT INN	21.9	0.0	0.0	0.0	1.6	5.3	6.1	11.7	18.7	23.5	27.3
82	PALMETTO PLACE	10.5	0.0	3.7	8.1	12.9	16.7	8.5	14.3	18.7	23.4	27.2
83	FOREST GLEN LODGES	37.0	0.0	0.0	0.0	0.0	0.0	6.0	11.5	18.5	23.2	27.0
84	ELM TREE LODGE	4.0	4.5	10.3	14.8	19.5	23.3	8.5	14.3	18.8	23.5	27.3
85	RIVER LODGE	17.9	0.0	0.0	1.2	6.5	10.4	5.8	11.4	19.2	24.4	28.3
86	SUNSET BAY ASSISTED LIVING CENTER	18.6	0.0	0.0	0.3	5.1	8.9	6.5	12.0	18.8	23.6	27.4
87	SUNCOAST RETREAT	11.3	0.0	2.9	7.3	12.1	15.9	8.5	14.2	18.6	23.4	27.2
88	GULF HAVEN	15.0	0.0	0.0	4.0	9.1	13.0	5.8	11.1	18.9	24.1	28.0
89		10.8	0.0	3.5	7.9	12.7	16.5	8.6	14.3	18.7	23.5	27.3
90		12.3	0.0	0.0	6.8	11.7	15.5	5.9	11.9	19.1	24.0	27.8

MAP ID	NAME	Elevation	C1 DPTH <sup>5</sup>	C2 DPTH	C3 DPTH	C4 DPTH	C5 DPTH	C1 SURGE <sup>6</sup>	C2 SURGE	C3 SURGE	C4 SURGE	C5 SURGE
91	OAKHAVEN (GALLO II)	28.1	0.0	0.0	0.0	0.0	1.4	5.8	11.1	16.7	25.6	29.5
92	HOME SWEET HOME	27.2	0.0	0.0	0.0	0.0	0.0	6.1	12.5	17.0	21.6	26.2
93	HILLANDALE	1.6	6.9	12.8	17.4	22.0	25.8	8.5	14.4	19.0	23.6	27.4
94	WILSON HOUSE	23.9	0.0	0.0	0.0	0.0	8.7	5.8	11.1	15.5	22.8	32.6
95	GALLO HOUSE I	28.9	0.0	0.0	0.0	0.0	0.8	5.8	11.1	16.8	25.7	29.7
96	SUMMERVILLE AT NEW PORT RICHEY	14.7	0.0	0.0	4.0	8.7	12.5	8.6	14.3	18.7	23.4	27.2
97	LOVING HEART ALF	9.3	0.0	5.0	9.5	14.2	18.0	8.5	14.4	18.8	23.5	27.3
98	OAKVIEW TERRACE	9.7	0.0	2.4	9.5	14.6	18.4	5.8	12.1	19.2	24.3	28.1
99	LA CASA GRANDE OF NEW PORT RICHEY	14.5	0.0	0.0	4.3	9.5	13.4	5.8	11.2	18.8	24.0	27.9
100	LITTLE HOUSE ON OAK	19.9	0.0	0.0	0.0	4.3	8.1	5.8	13.0	19.9	24.2	28.0
101	AMBERWOOD (NATURE TRAIL)	21.0	0.0	0.0	0.0	4.5	8.1	5.8	11.1	17.2	25.5	29.2
102	PAGE MANOR	13.9	0.0	0.8	5.9	10.2	14.0	6.7	14.8	19.8	24.2	28.0
103	JENNIFER GARDENS	17.0	0.0	0.0	2.8	7.2	11.2	6.2	14.0	19.7	24.2	28.2
104	COTTAGES OF NEW PORT RICHEY	10.0	0.0	4.5	9.1	13.7	17.6	8.3	14.5	19.1	23.7	27.5
105	JONES' HOUSE	25.5	0.0	0.0	0.0	0.0	3.2	5.8	11.2	21.0	25.0	28.7
106	TRAVIS LODGE	5.6	2.9	8.9	13.6	18.1	22.0	8.5	14.5	19.2	23.7	27.6
107	BAYONET POINT KIDNEY CENTER	30.7	0.0	0.0	0.0	0.0	0.0	5.8	11.1	16.5	24.3	30.5
108	GULF COAST KIDNEY CENTER	30.7	0.0	0.0	0.0	0.0	0.0	5.8	11.1	16.5	24.3	30.5
109	GULF COAST KIDNEY CENTER- HUDSON	9.5	0.0	5.2	10.6	14.8	19.0	8.2	14.7	20.1	24.3	28.5
110	NEW PORT RICHEY KIDNEY CENTER	7.1	0.1	6.1	11.7	16.4	20.2	7.1	13.1	18.7	23.4	27.2
111	NEW PORT RICHEY KIDNEY CENTER	11.6	0.0	1.5	7.1	11.8	15.6	7.2	13.1	18.7	23.4	27.2
112	BAYONET PT. HEALTH AND REHAB. TANDEM HEALTHCARE OF BAYONET POINT	17.5	0.0	0.0	2.6	6.6	10.8	7.4	14.7	20.1	24.1	28.2
113	POINT	11.8	0.0	2.9	8.3	12.5	16.7	8.3	14.7	20.1	24.3	28.5
114	BEAR CREEK NURSING CTR. WINDSOR WOODS CONVALESCENT CENTER	19.1	0.0	0.0	0.0	6.3	10.1	5.8	11.1	17.4	25.4	29.2
115	CENTER	10.4	0.0	4.3	9.6	13.9	18.0	8.2	14.7	20.0	24.2	28.4
116	LIFE CARE CENTER OF NPR	20.2	0.0	0.0	0.0	4.0	7.9	5.8	11.1	18.9	24.2	28.1
117	HEATHER HILL HEALTHCARE CTR	10.0	0.0	4.3	8.7	13.4	17.2	8.6	14.3	18.7	23.4	27.2
118	SOUTHERN PINES	17.7	0.0	0.0	1.2	6.0	9.8	6.2	12.0	18.9	23.7	27.5
119	ORCHARD RIDGE NURSING CENTER	17.6	0.0	0.0	1.2	6.3	10.1	6.0	11.5	18.8	23.9	27.8
120	MADISON PT. REHAB. AND NURSING	17.5	0.0	0.0	1.5	6.2	10.0	6.9	12.8	19.0	23.7	27.6


MAP ID	NAME	Elevation	C1 DPTH <sup>5</sup>	C2 DPTH	C3 DPTH	C4 DPTH	C5 DPTH	C1 SURGE <sup>6</sup>	C2 SURGE	C3 SURGE	C4 SURGE	C5 SURGE
	CTR.											
121	TANDEM HEALTHCARE (PARK LAKE)	82.6	0.0	0.0	0.0	0.0	0.0	-9999.0	-9999.0	-9999.0	-9999.0	9999.0
122	GCJFS DARLINGTON HOME	8.7	0.0	5.2	10.1	14.8	18.6	8.2	13.9	18.8	23.5	27.3
123	GCJFS CHATLIN HOME	13.9	0.0	0.0	4.0	8.0	12.0	5.8	12.6	17.9	22.0	26.0
124	HARBOR CHILDRENS' TREATMENT CTR	25.2	0.0	0.0	0.0	0.0	3.5	5.8	11.1	15.6	24.1	28.7
125	HARBOR MANDALA JUV. JUS. COMMITTMEN	34.8	0.0	0.0	0.0	0.0	0.0	5.8	11.1	15.6	24.6	28.6
126	HARBORS MANDELA HOUSE	11.6	0.0	2.6	7.6	12.3	16.1	6.1	14.1	19.1	23.8	27.6
127	HARBORS COMMUNITY RECOVERY	9.6	0.0	4.2	9.2	13.9	17.7	8.1	13.8	18.8	23.6	27.4
128	HARBORS ACADEMY	32.5	0.0	0.0	0.0	0.0	0.0	6.0	12.3	17.0	21.6	25.8
129	HOLIDAY SURGERY CENTER BAYONET POINT SURGERY & ENDOSCOPY	16.7	0.0	0.0	1.7	5.6	9.4	5.8	12.3	18.4	22.3	26.1
130	SUNCOAST EYE CENTER	15.7	0.0	0.0	4.4	8.6	12.8	8.0	14.8	20.1	24.3	28.5
131	MEDICAL DEVELOPMENT CORP (BONATI)	6.0	2.2	9.0	14.2	18.6	22.7	8.2	15.0	20.2	24.6	28.7
132	MEADOW LANE SURGERY CENTER	19.4	0.0	0.0	0.0	4.1	7.9	8.0	13.6	18.7	23.5	27.3
133	TRINITY OUTPATIENT CENTER NEW PORT RICHEY SURGERY CENTER	29.4	0.0	0.0	0.0	0.0	0.0	5.8	11.1	15.5	21.0	28.0
134	SEVEN SPRINGS SURGERY CENTER	8.0	0.0	6.0	10.6	15.4	19.2	8.0	14.0	18.6	23.4	27.2
135	SUNCOAST OUTPATIENT SURGERY CENTER	19.3	0.0	0.0	0.3	4.7	8.5	5.8	11.1	19.6	24.0	27.8
136	SUNCOAST OUTPATIENT SURGERY CENTER	8.4	0.0	5.7	10.2	15.0	18.8	7.9	14.0	18.5	23.3	27.1
137	PROGRESS ENERGY PLANT	20.4	0.0	0.0	0.0	0.8	4.8	6.5	12.4	17.0	21.2	25.2

## STORM TIDE ATLAS

The surge inundation limits (MOM surge heights minus the ground elevations) are provided as GIS shape files and graphically displayed on maps in the *Hurricane Storm Tide Atlas for the Tampa Bay Region*. The *Atlas* was prepared by Tampa Bay Regional Planning Council under contract to the State of Florida, Division of Emergency Management, as part of this study effort. The maps prepared for the *Atlas* consist of base maps (1:24000) including topographic, hydrographic and highway files (updated using 2008 county and state highway data). Detailed shoreline and storm tide limits for each category of storm were determined using the region's geographic information system (GIS).

The purpose of the maps contained in this Atlas is to reflect a "worst probable" scenario of the hurricane storm surge inundation and to provide a basis for the hurricane evacuation zones and study analyses. While the storm tide delineations include the addition of an astronomical mean high tide and tidal anomaly, it should be noted that the data reflects only stillwater saltwater flooding. **Local processes such as waves, rainfall and flooding from overflowing rivers, are usually included in observations of storm surge height, but are not surge and are not calculated by the SLOSH model. It is incumbent upon local emergency management officials and planners to estimate the degree and extent of freshwater flooding as well as to determine the magnitude of the waves that will accompany the surge.**

Figure 8 provides an index of the map series.

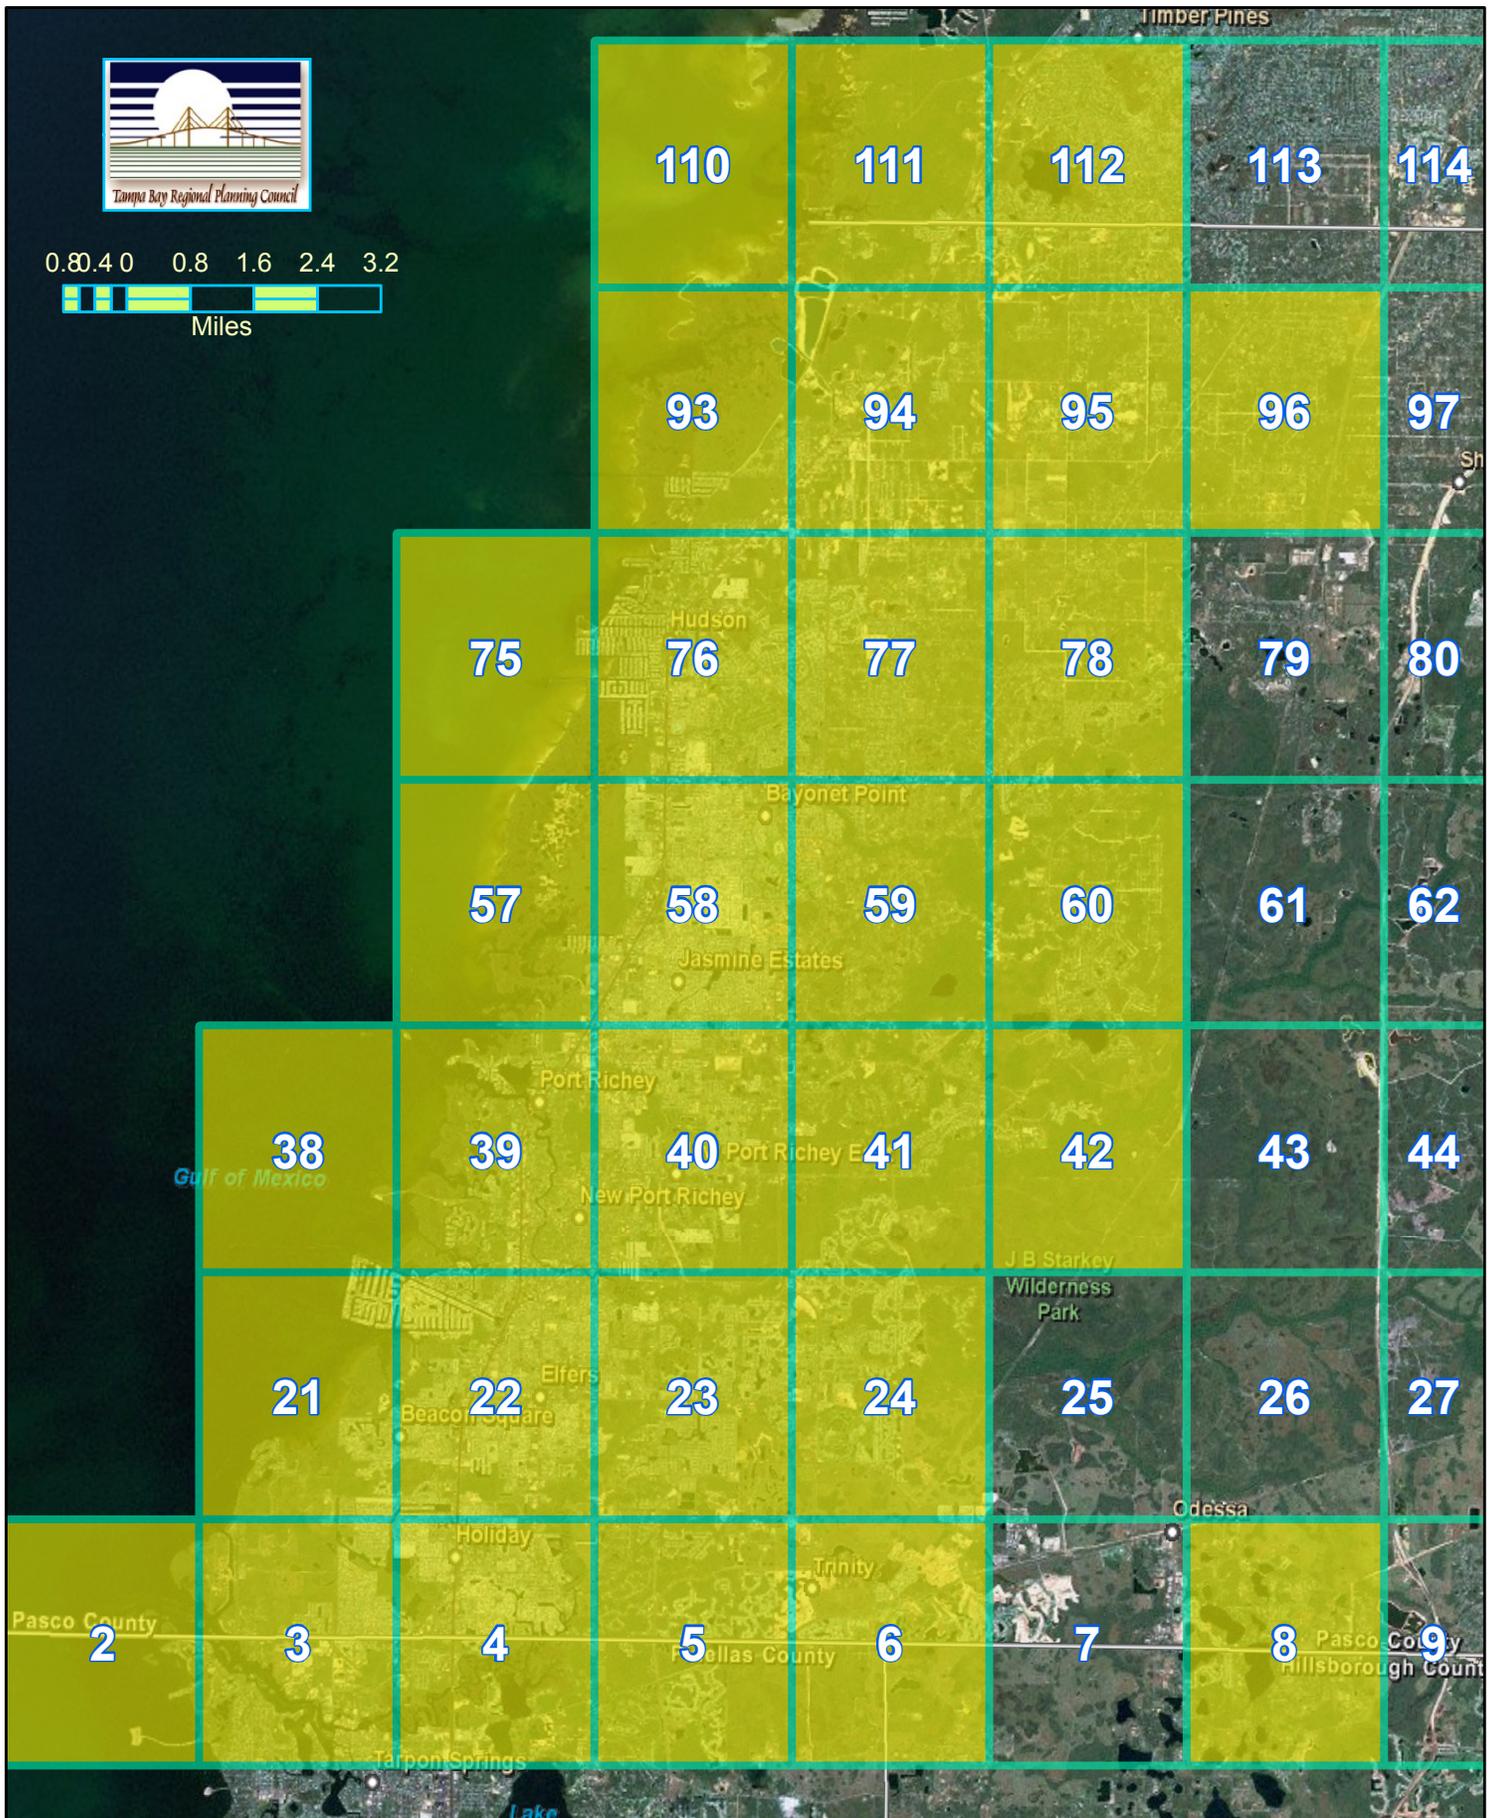

SRES Storm Tide Atlas Index Page - Pasco County

## NOTES ON STORM TIDE LIMITS

Historically, the SLOSH storm surge analysis had focused on “average” storm parameters (size and forward speed), although the intensity and angle of approach was modeled to include direct strikes and catastrophic intensity. In the 2010 Regional Evacuation Study Update, 12,000 hypothetical hurricanes were included in the SLOSH suite of storms modeled varying forward speeds and the radii of maximum winds to include the large storm events and different forward speeds. This allowed for the development of a truer picture of the storm surge vulnerability in the region. The five categories of hurricane reflect a “worst probable” storm tide limit for hurricanes holding the wind speed constant (consistent with the Saffir Simpson Hurricane Wind Scale) while varying storm parameters include size, forward speed, and angle of approach.

This has led to some confusion regarding evacuation decision-making since hurricane evacuations are based primarily on storm surge vulnerability. The National Oceanic and Atmospheric Administration (NOAA) is working to enhance the analysis and prediction of storm surge. Direct estimates of inundation are being communicated in the NHC's Public Advisories and in the Weather Forecast Office's (WFO) Hurricane Local Statements. NHC's probabilistic storm surge product, which provides the likelihood of a specific range of storm surge values, became operational in 2009, and the NWS Meteorological Development Laboratory is providing experimental, probabilistic storm surge products for 2010. In addition, coastal weather forecast offices will provide experimental Tropical Cyclone Impacts Graphics in 2010; these include a qualitative graphic on the expected storm surge impacts. Finally, the NWS is exploring the possibility of issuing explicit Storm Surge Warnings which could be implemented in the next couple of years. In all of these efforts, the NWS is working to provide specific and quantitative information to support decision-making at the local level<sup>1</sup>. NOAA continues to emphasize that the hurricane forecasts are not 100% accurate and dependent upon many factors.

### Pasco County Legend


CATEGORY : OVERALL HGT

	1 : Up to 9 ft
	2 : Up to 15 ft
	3 : Up to 21 ft
	4 : Up to 27 ft
	5 : Up to 34 ft


To the left are the storm tide limits identified for Pasco County under the five (5) categories of hurricane on the Saffir Simpson Hurricane Wind Scale. It is important to recognize the following:

- The surge tide values represent the highest surge height elevation above a standard datum (NAVD88) predicted by the model in the entire county and will only be appropriate for selected areas.
- Typically the highest surge tide values are NOT the surge heights predicted at the coast. The highest storm tide values are typically experienced inside bays and up rivers and inlets (water above ground).
- Storm Tide ranges by category of storm are presented on Table 3 on page 10 of this document.
- For surge heights at specific locations, please refer to Table 4 on page 16 which provides the expected storm surge elevation at points of reference and the actual inundation (water depth) at that site.

<sup>1</sup>[http://www.nhc.noaa.gov/sshws\\_statement.shtml](http://www.nhc.noaa.gov/sshws_statement.shtml)

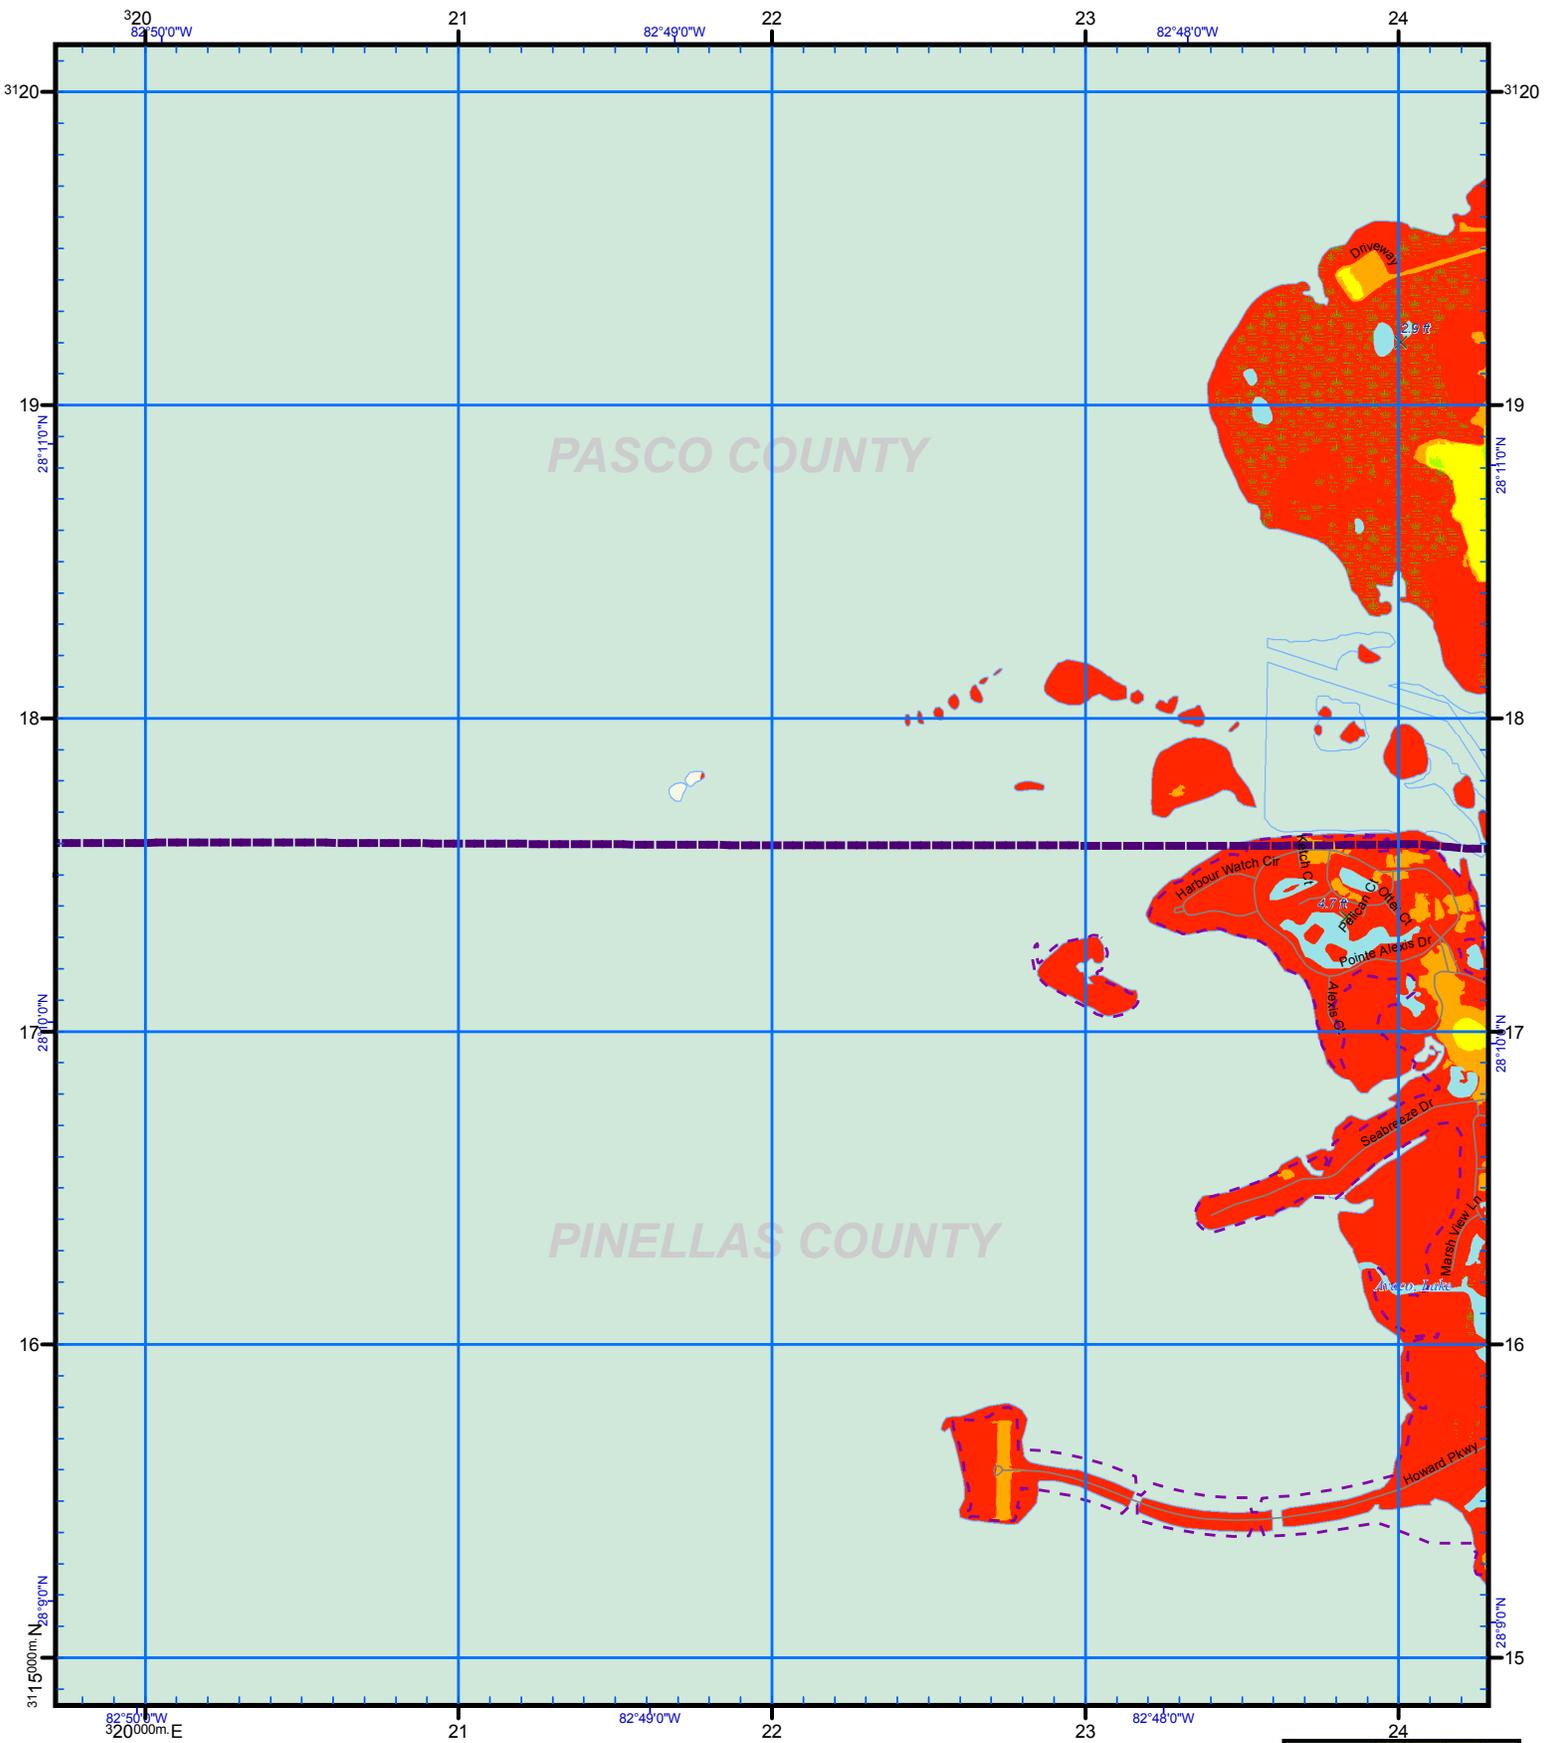

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





**Notes:**  
 1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
 2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
 3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	Points of Reference	Evacuation Route	City Limits	NHD Lakes	NHD Major Water
CAT 1	CAT 2	CAT 3	CAT 4	CAT 5	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
 0 2,000 Feet  
 USNG Page 17R LM 20 15  
 Map Plate 2

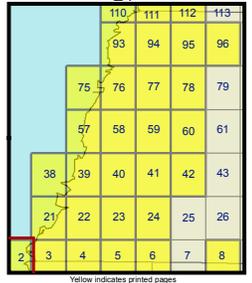

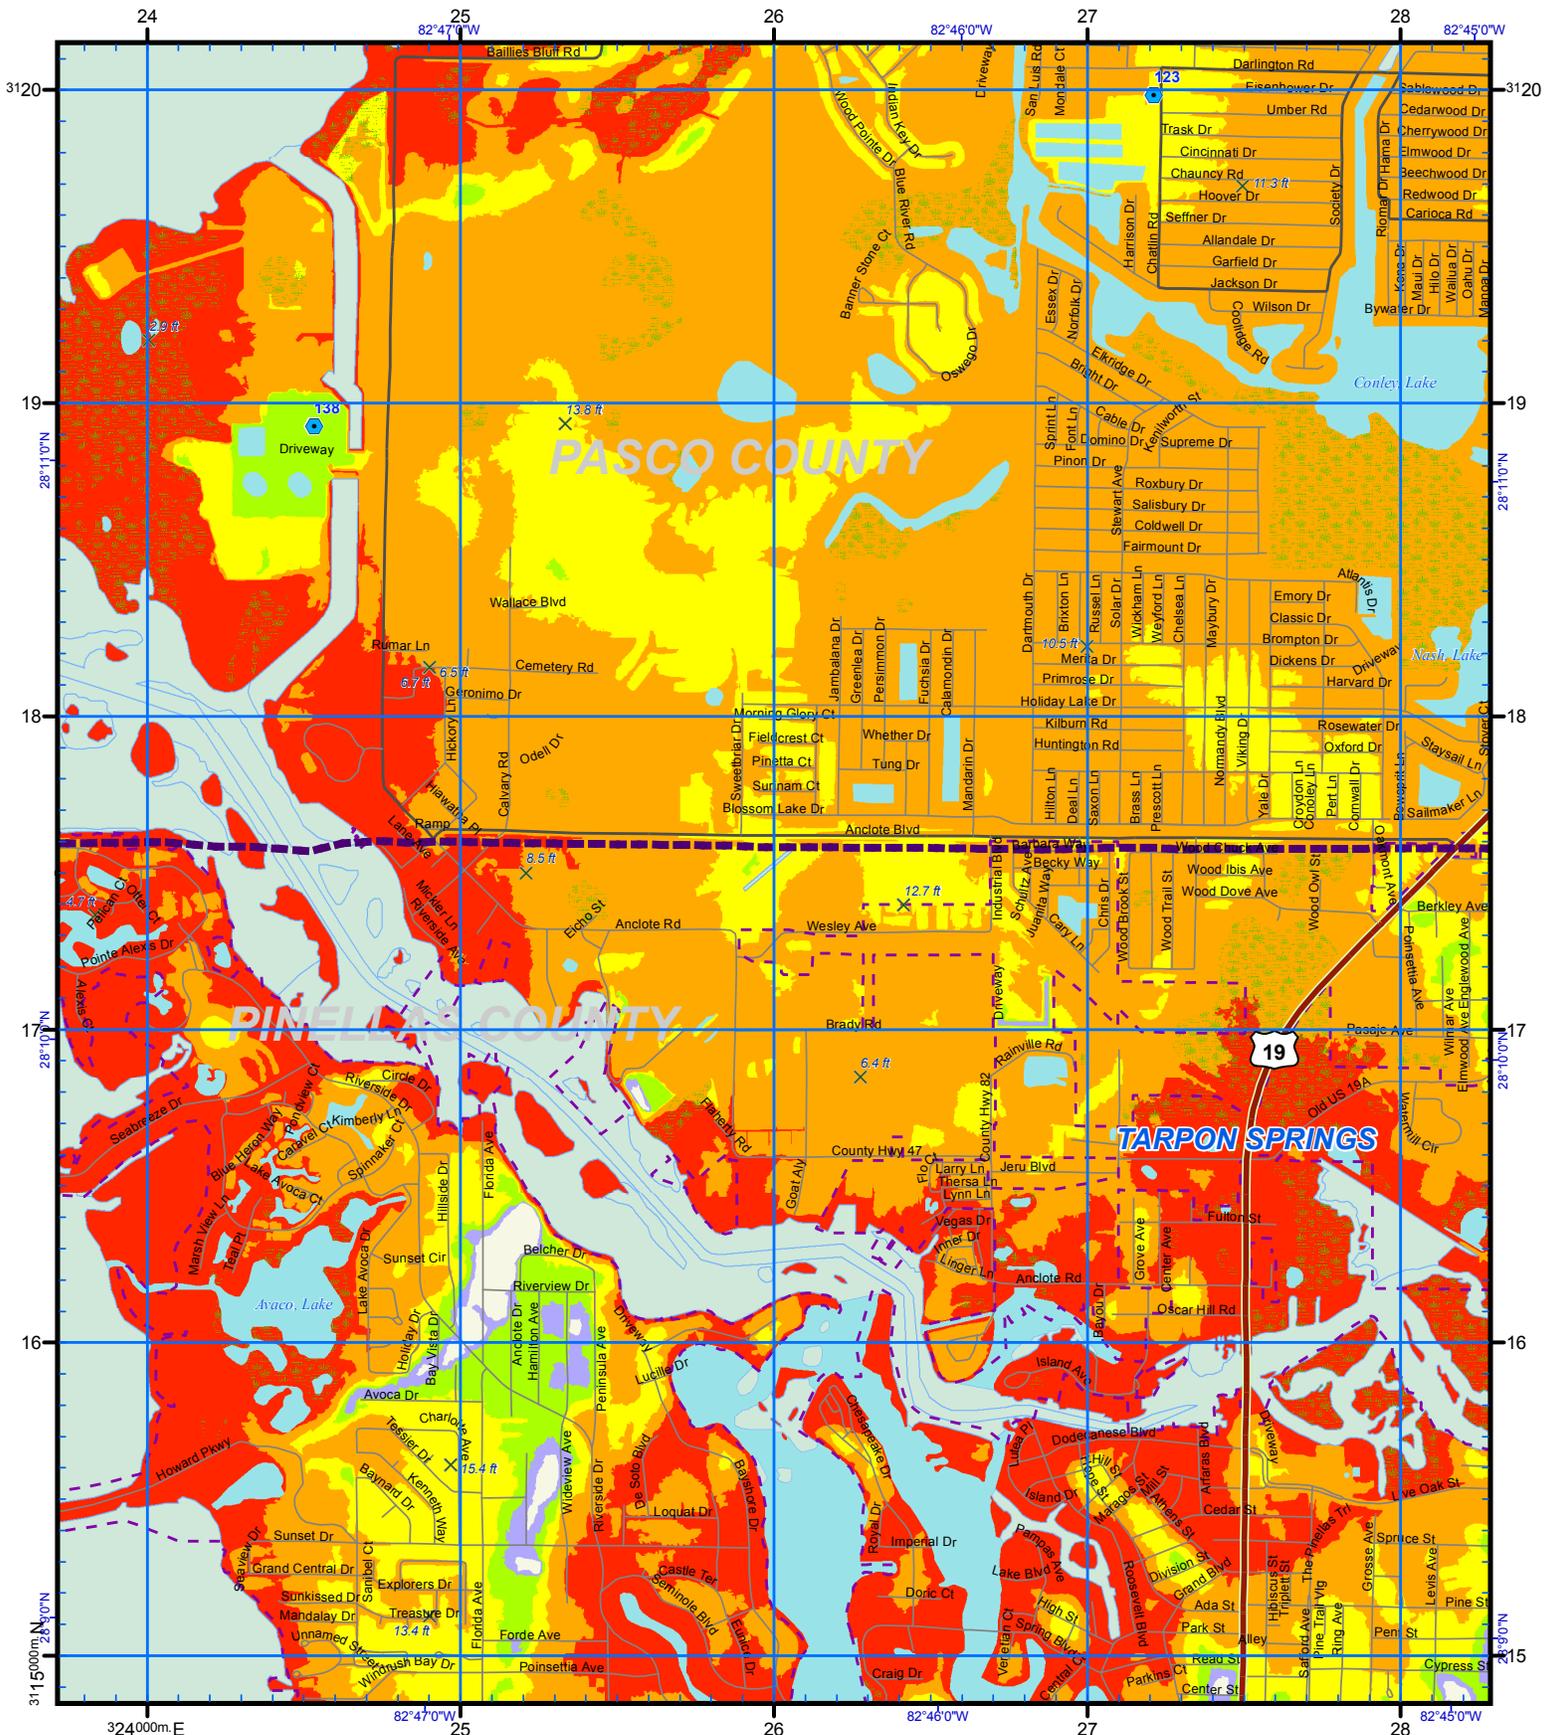

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





- Notes:**
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximum surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
  
 USNG Page 17R LM 24 15  
 Map Plate 3

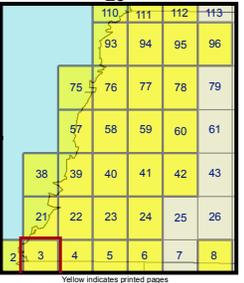

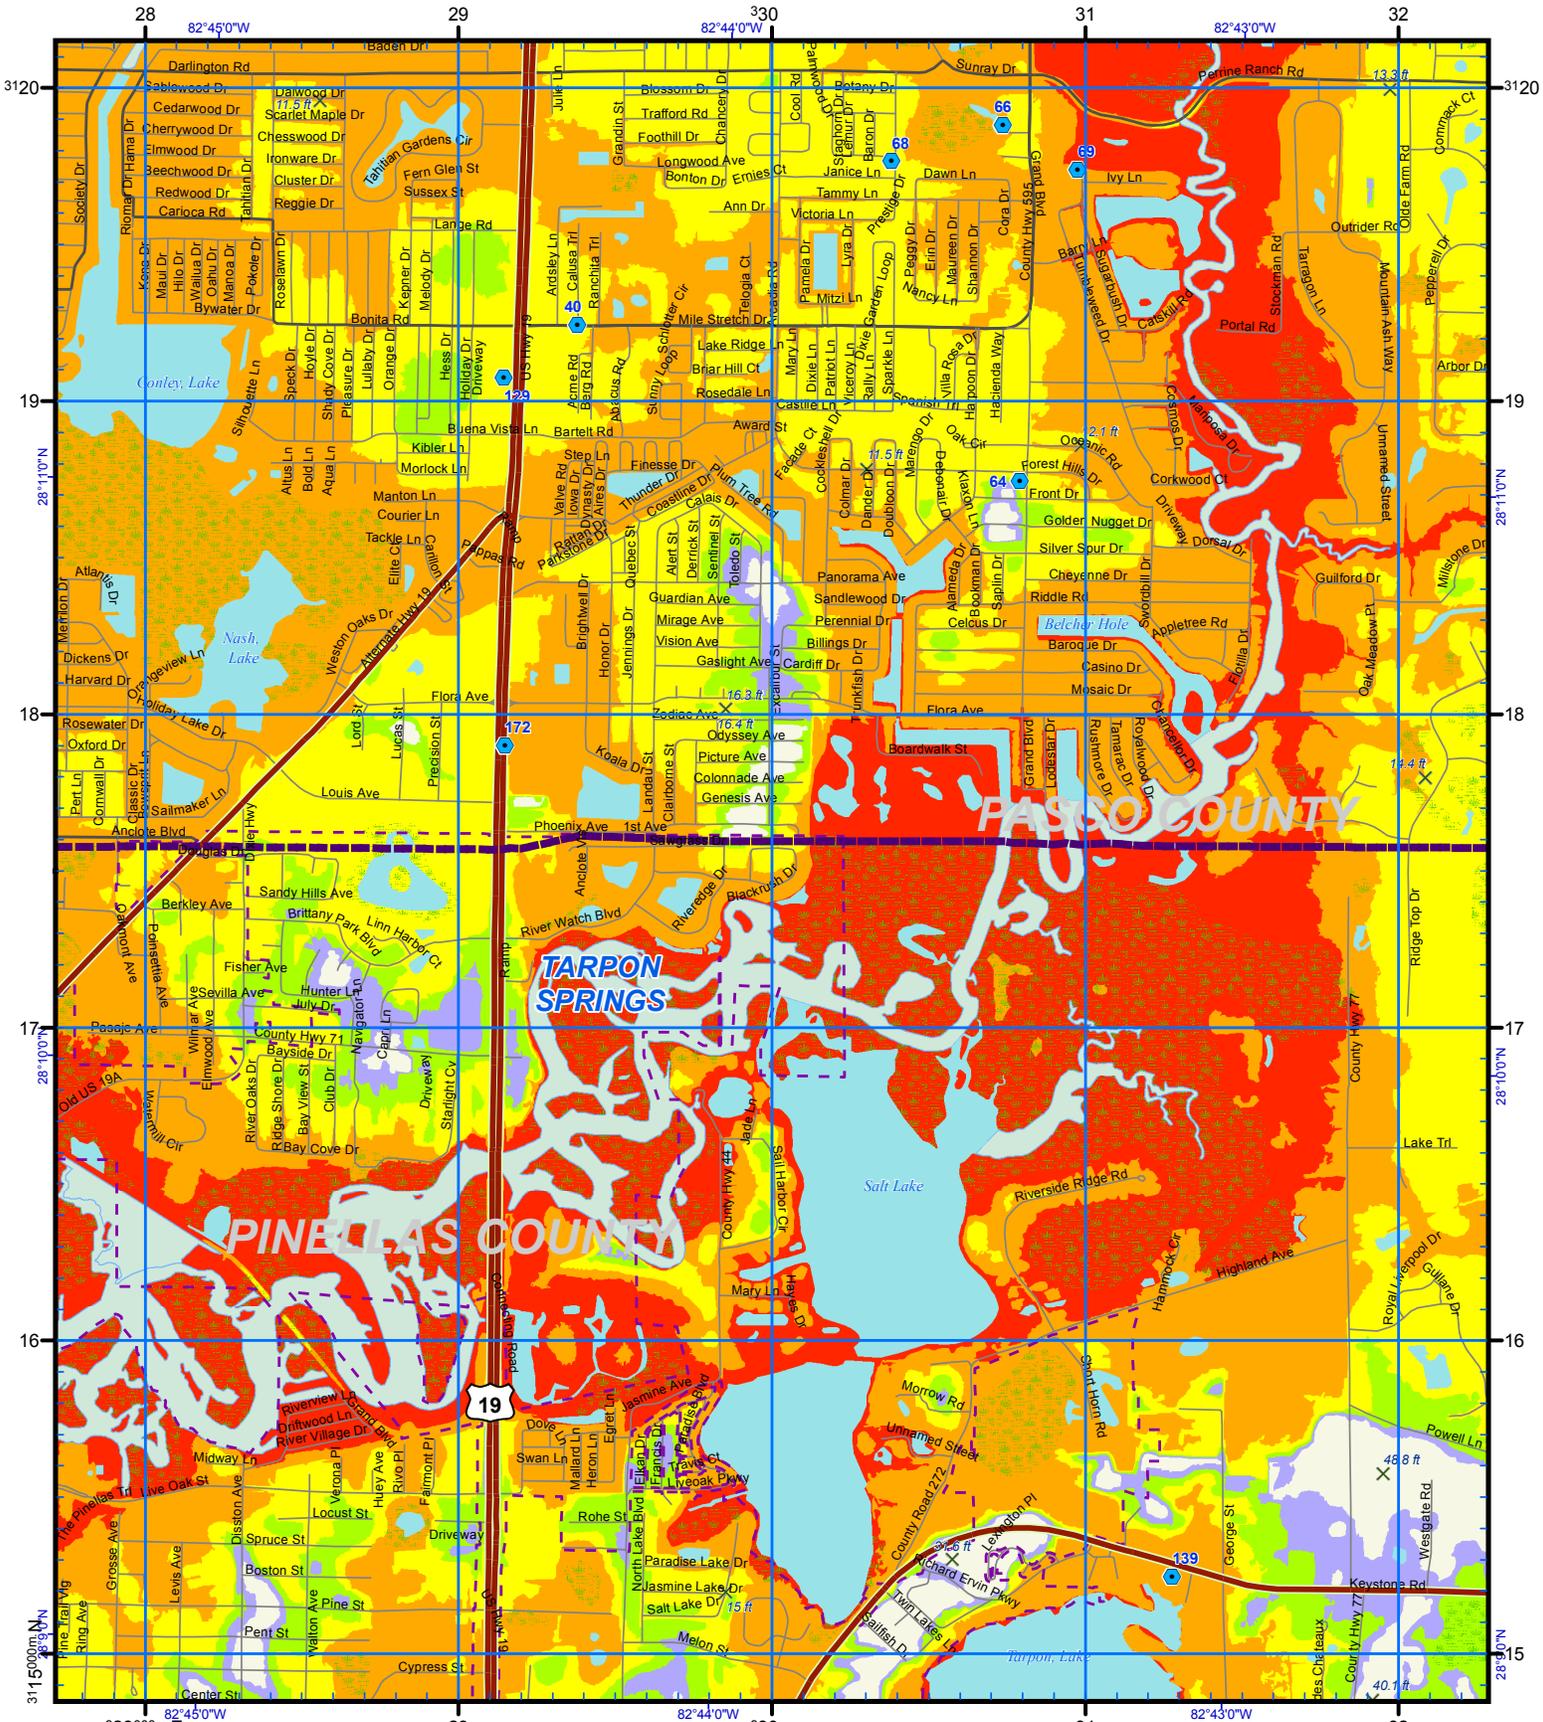

**US National Grid**  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG





- Notes:**
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximum surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


	<b>HOSPITAL</b>	<b>CAT</b>		1
	<b>Points of Reference</b>		2	
	<b>Evacuation Route</b>		3	
	<b>City Limits</b>		4	
	<b>NHD Lakes</b>		5	
	<b>NHD Major Water</b>			

**Storm Tide Zones**  
**Pasco County, 2010**  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 28 15  
Map Plate 4

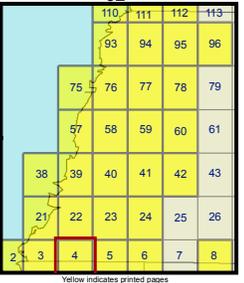

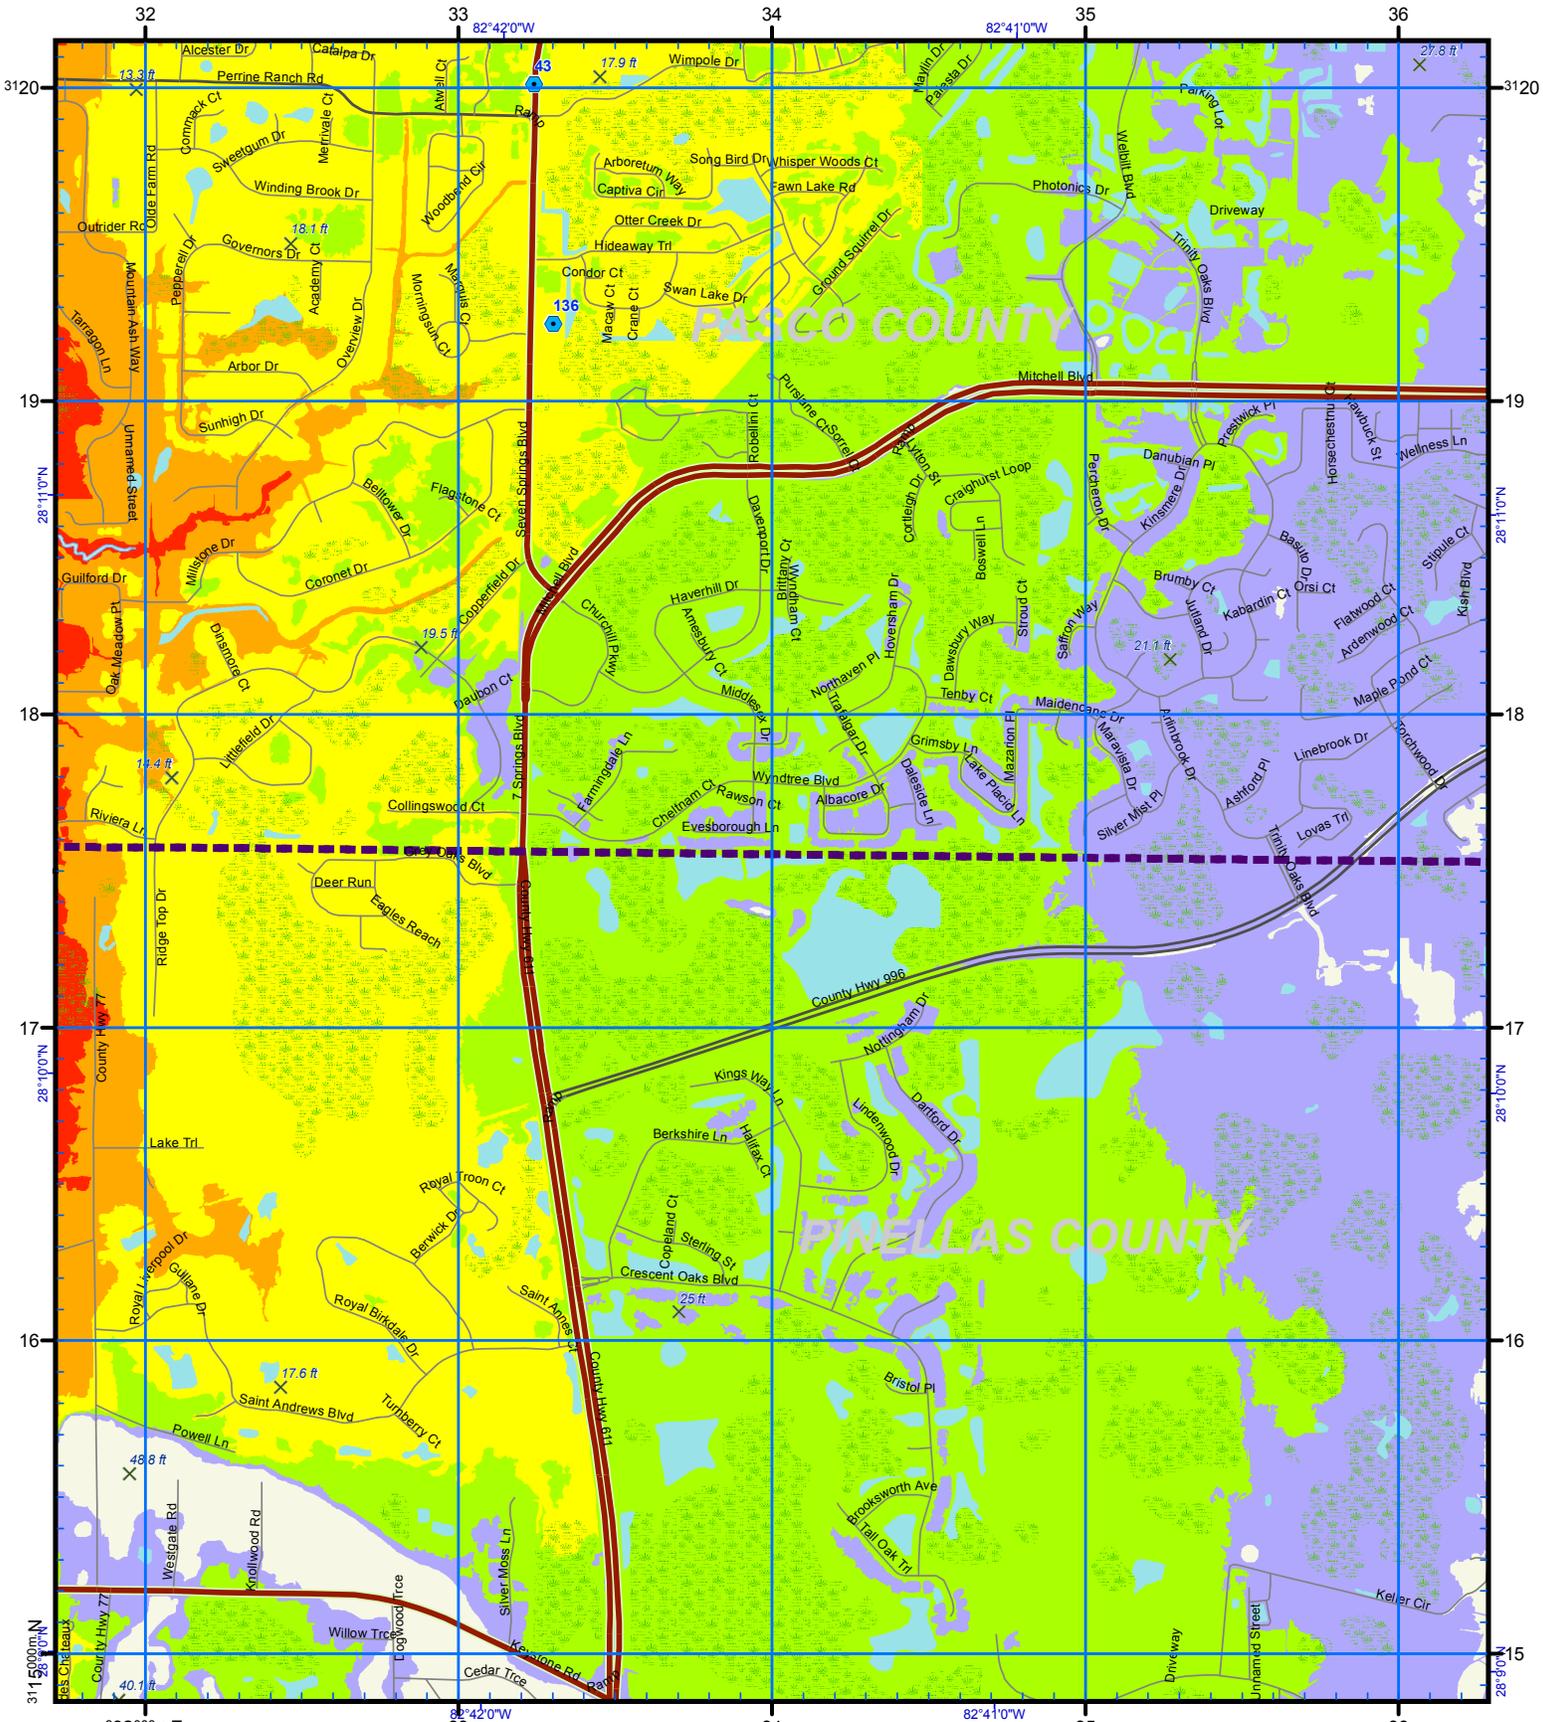

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





- Notes:
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**

HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
  
 USNG Page 17R LM 32 15  
 Map Plate 5

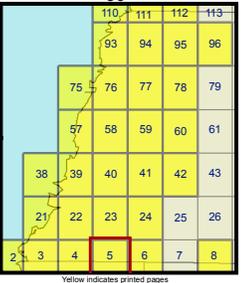

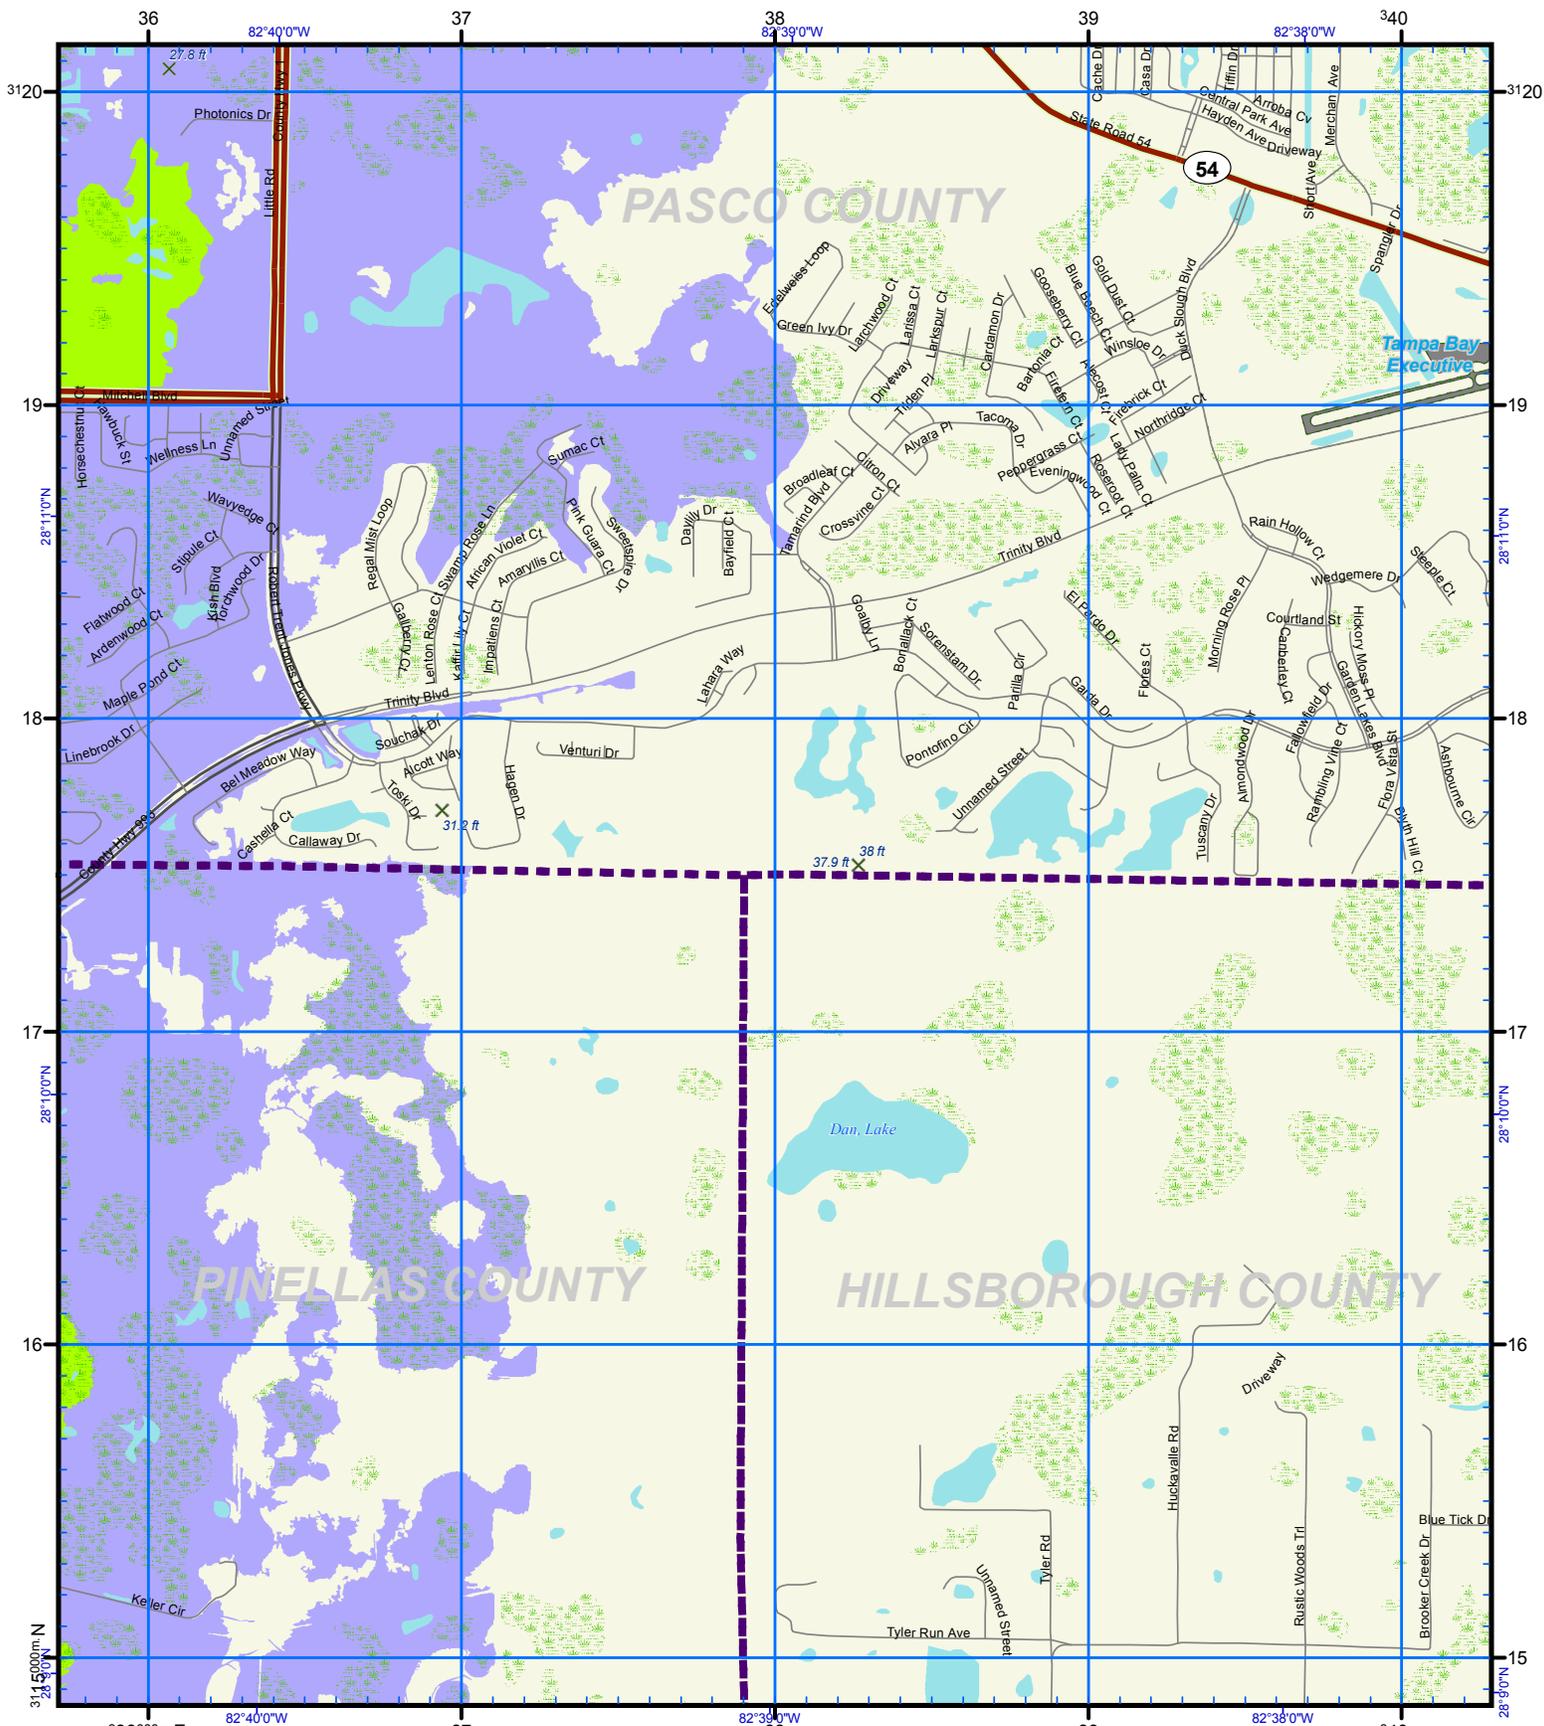

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





**Notes:**  
 1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
 2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
 3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**

HOSPITAL	<b>CAT</b>
Points of Reference	1
Evacuation Route	2
City Limits	3
NHD Lakes	4
NHD Major Water	5

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
 0 2,000 Feet  
 USNG Page 17R LM 36 15  
 Map Plate 6

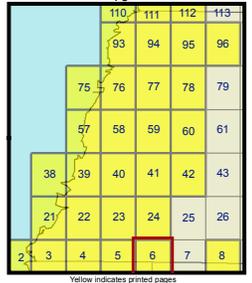

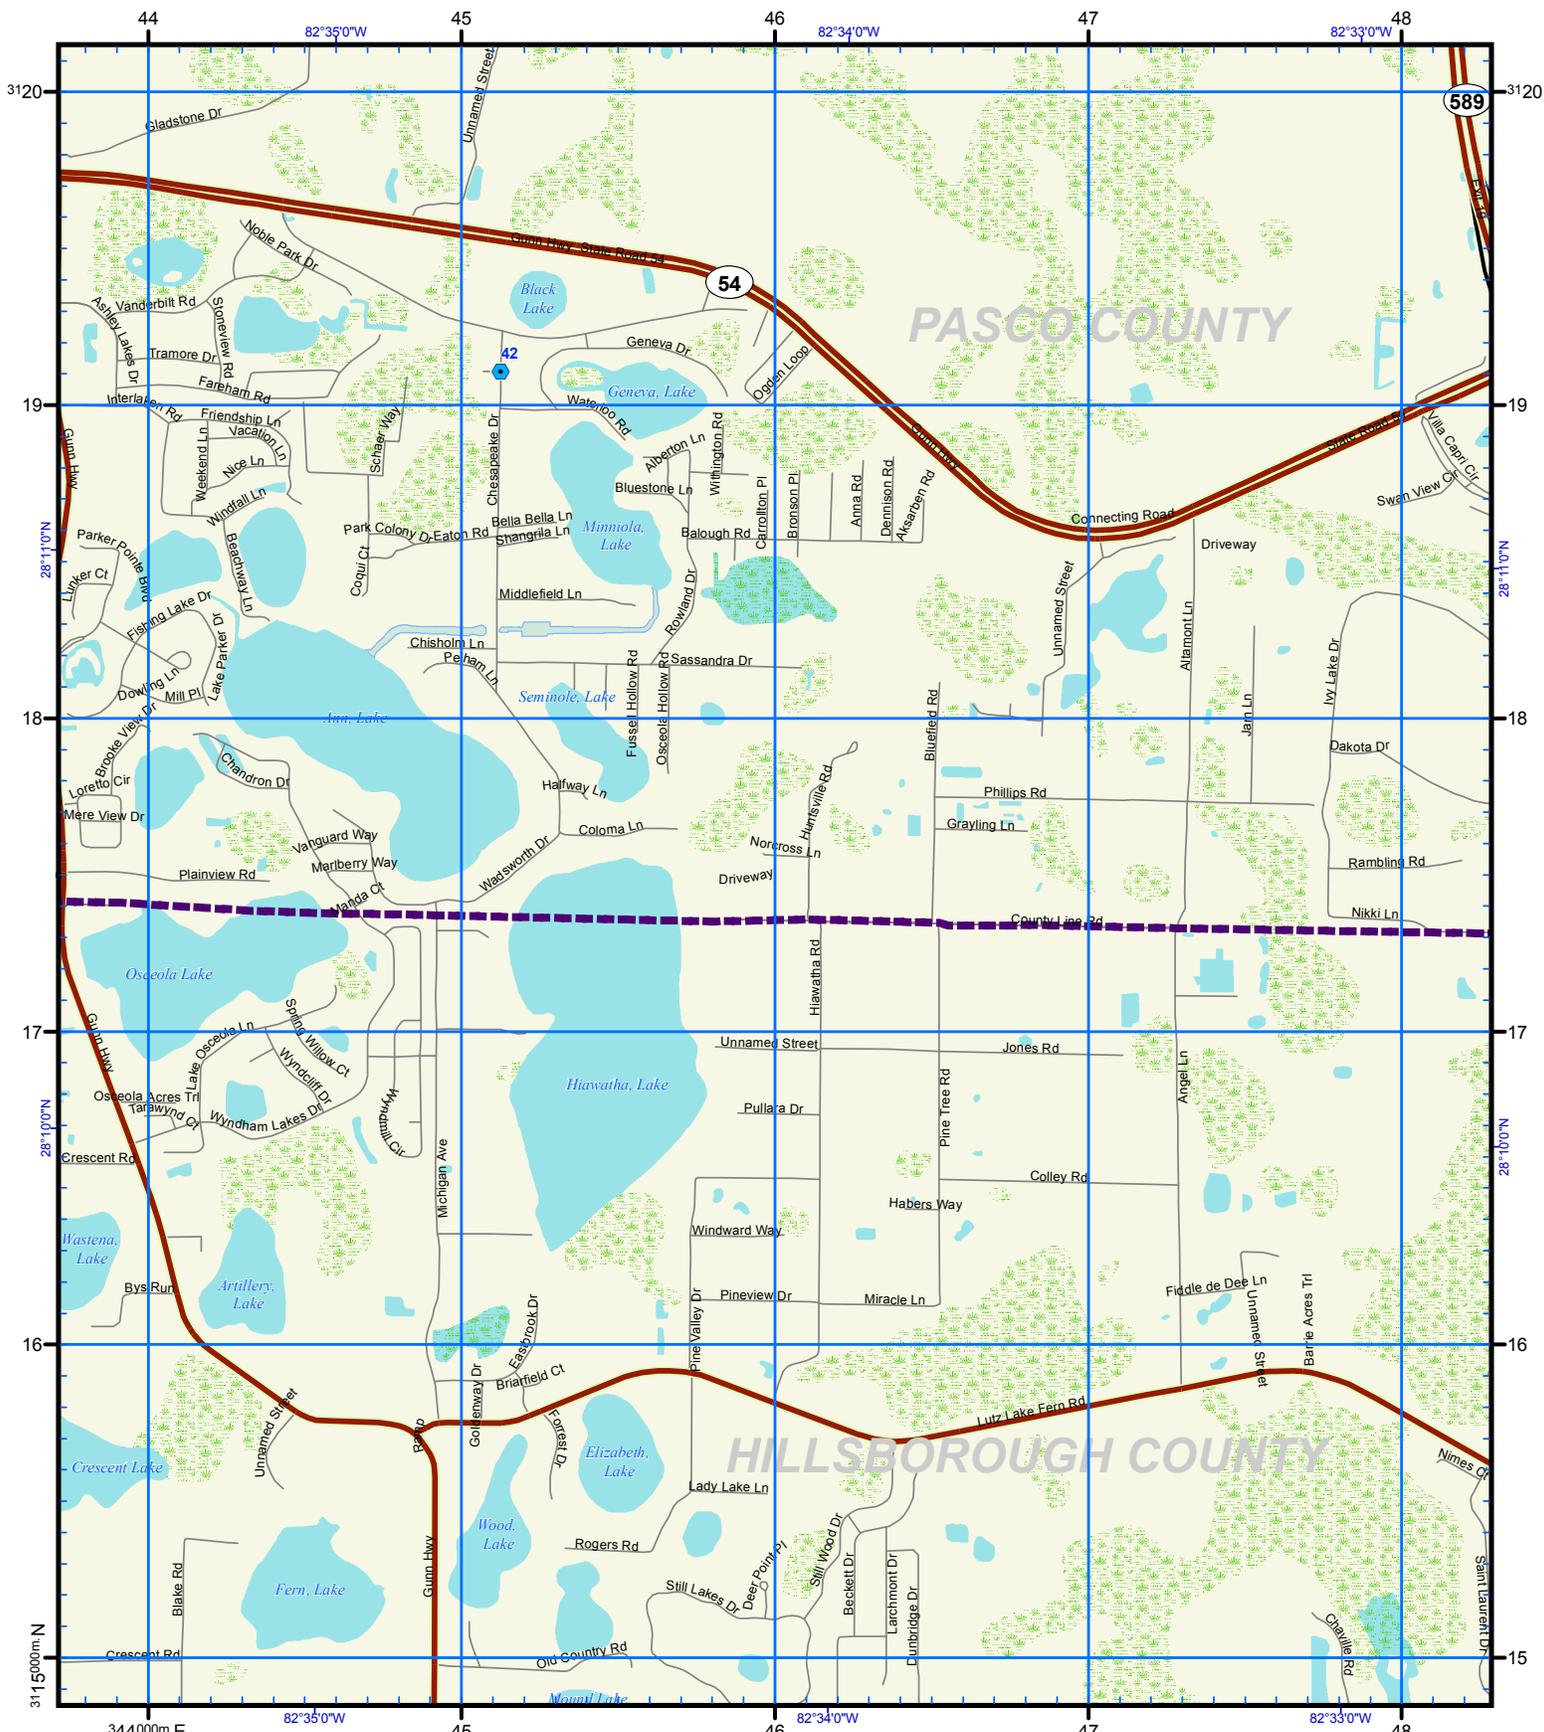

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





- Notes:**
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
 0 2,000 Feet  
 USNG Page 17R LM 44 15  
 Map Plate 8

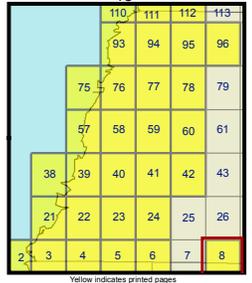

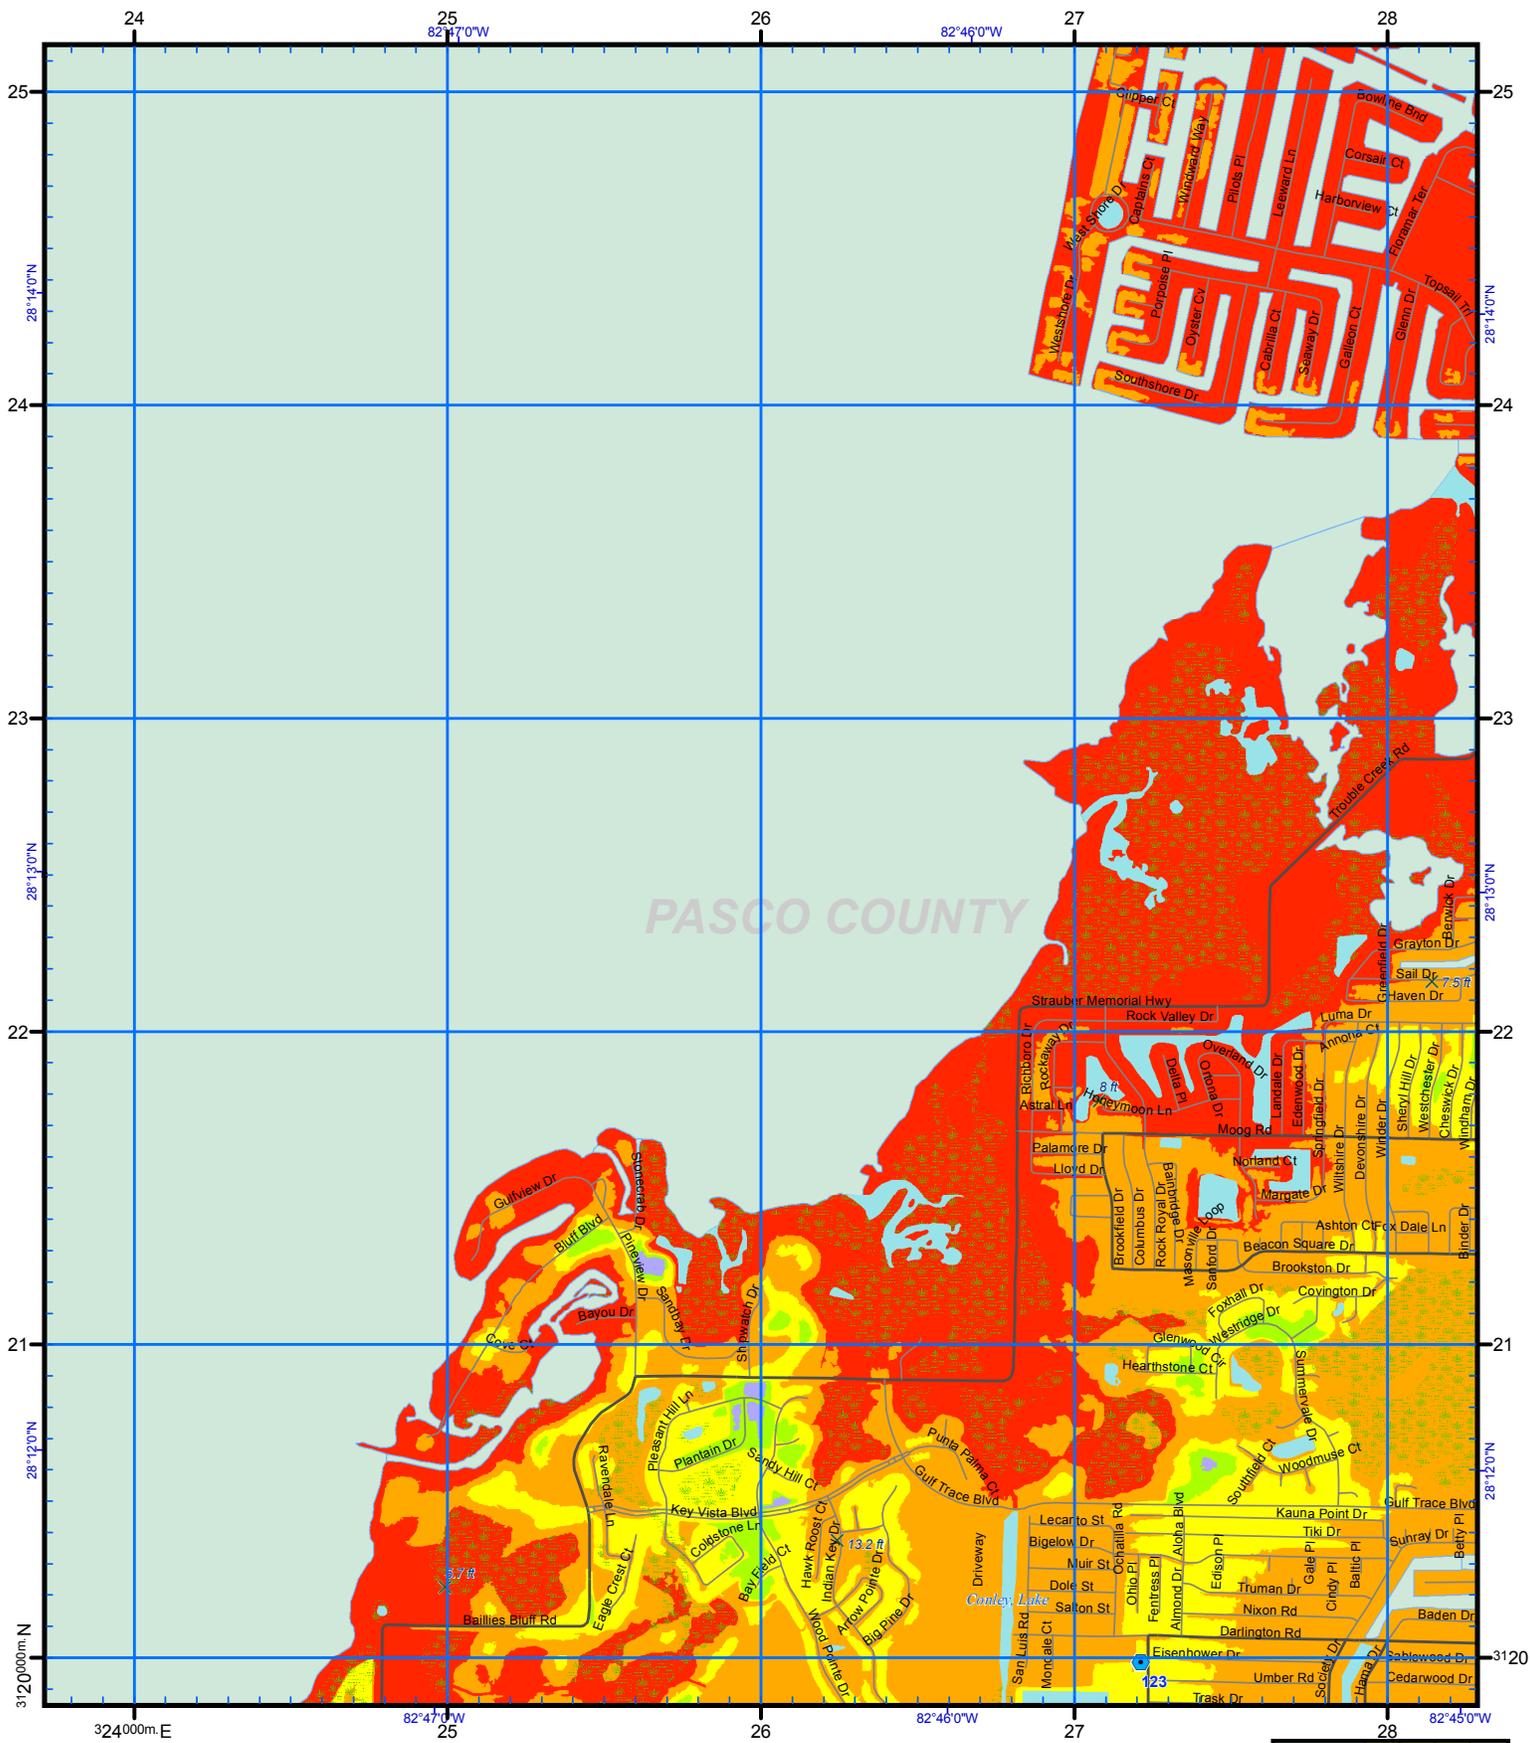

US National Grid  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG





Notes:  
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 24 20  
Map Plate 21

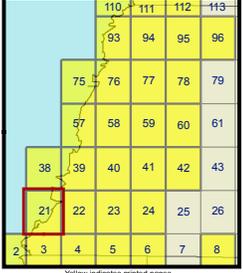

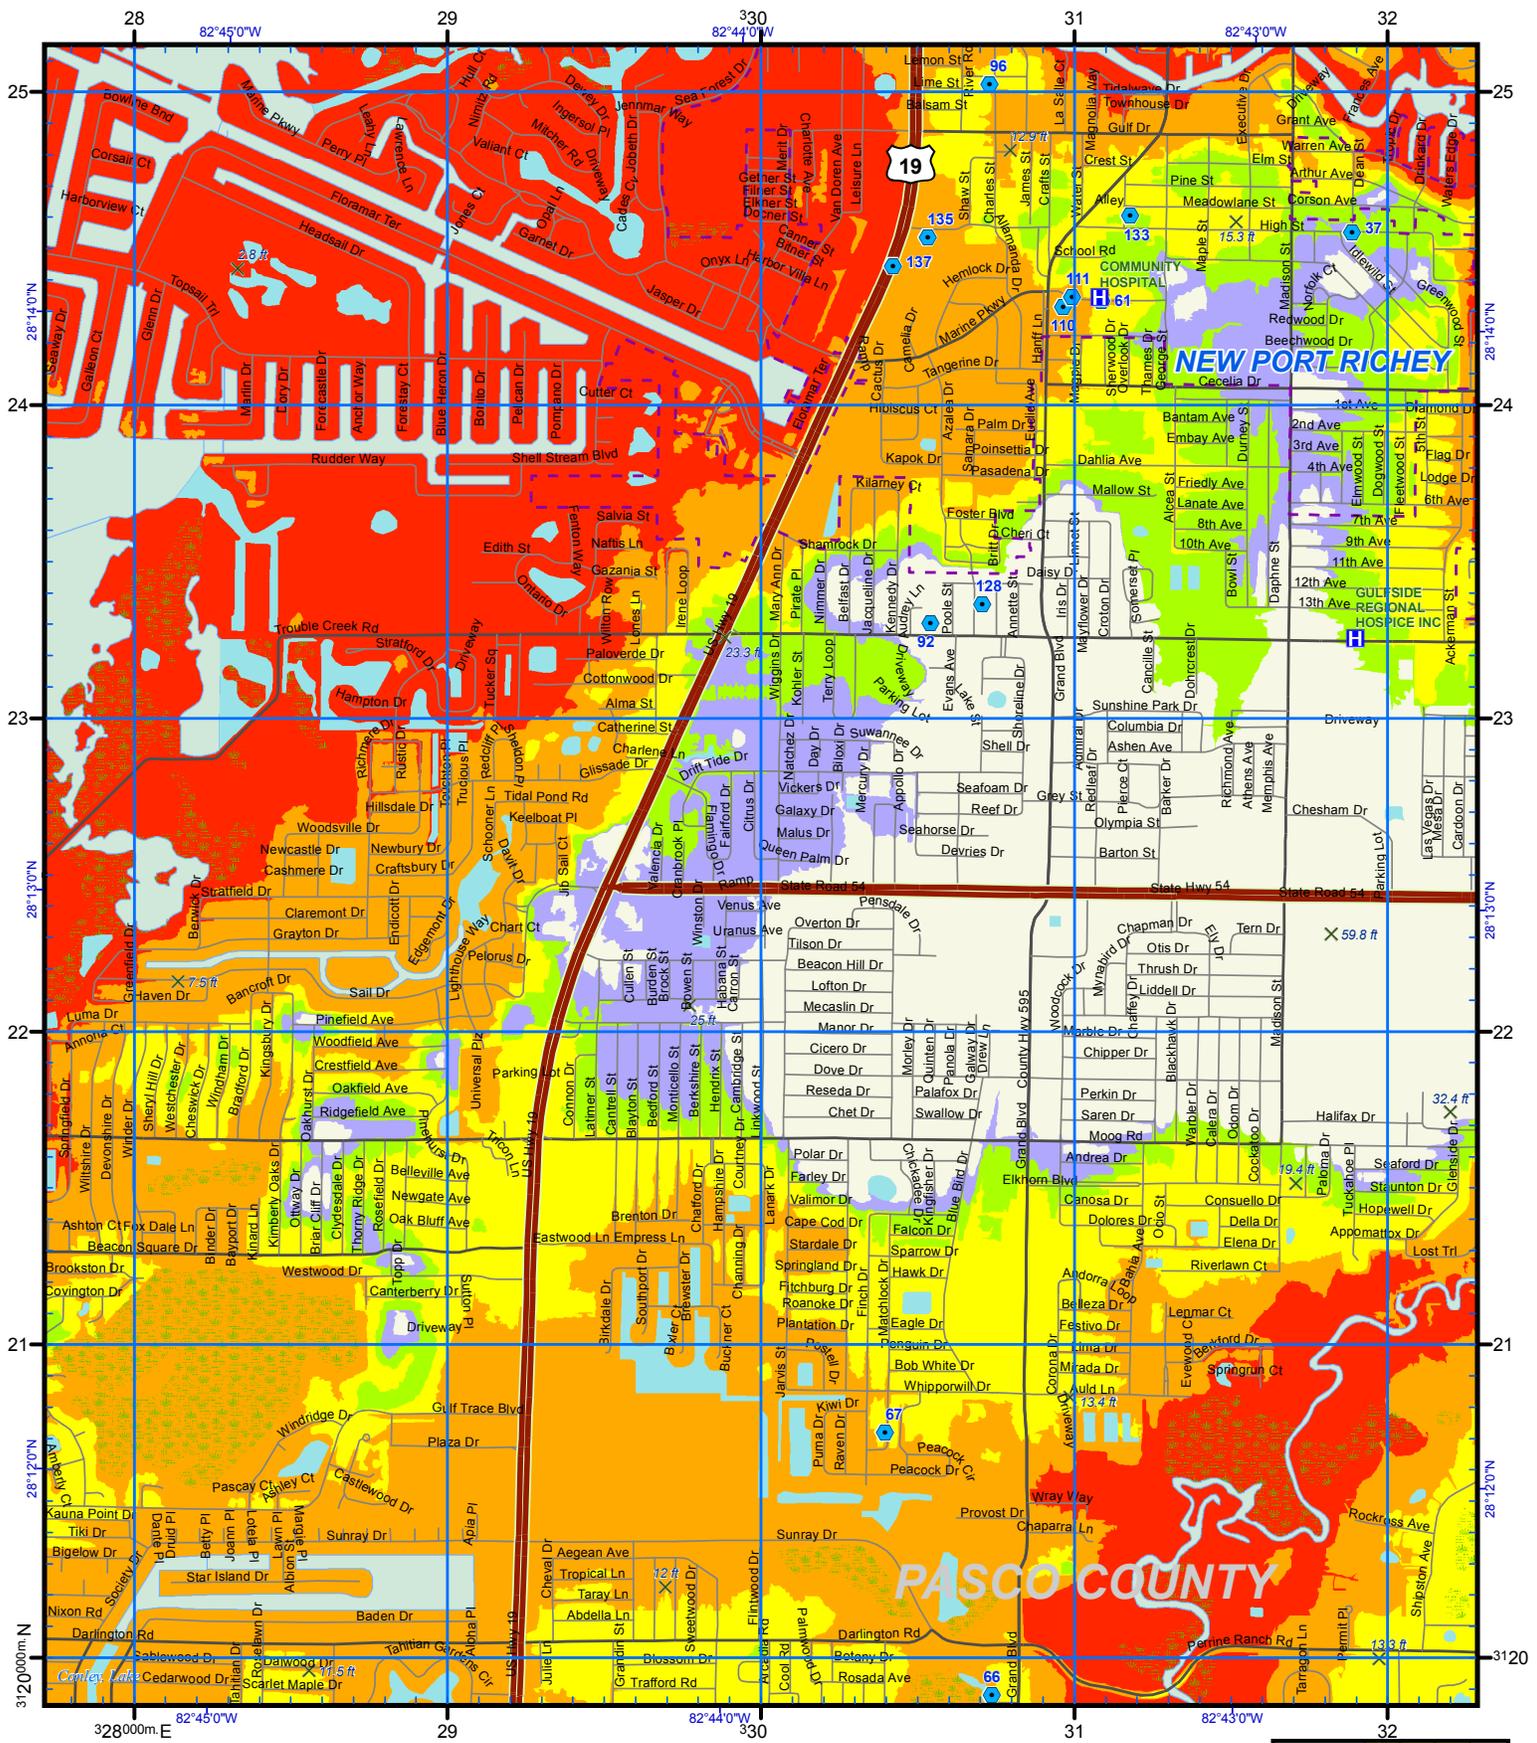

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





**Notes:**  
 1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
 2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
 3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
 0 2,000 Feet  
 USNG Page 17R LM 28 20  
 Map Plate 22

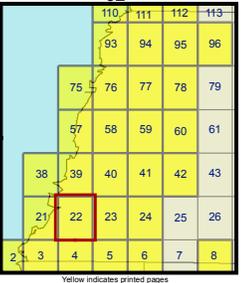

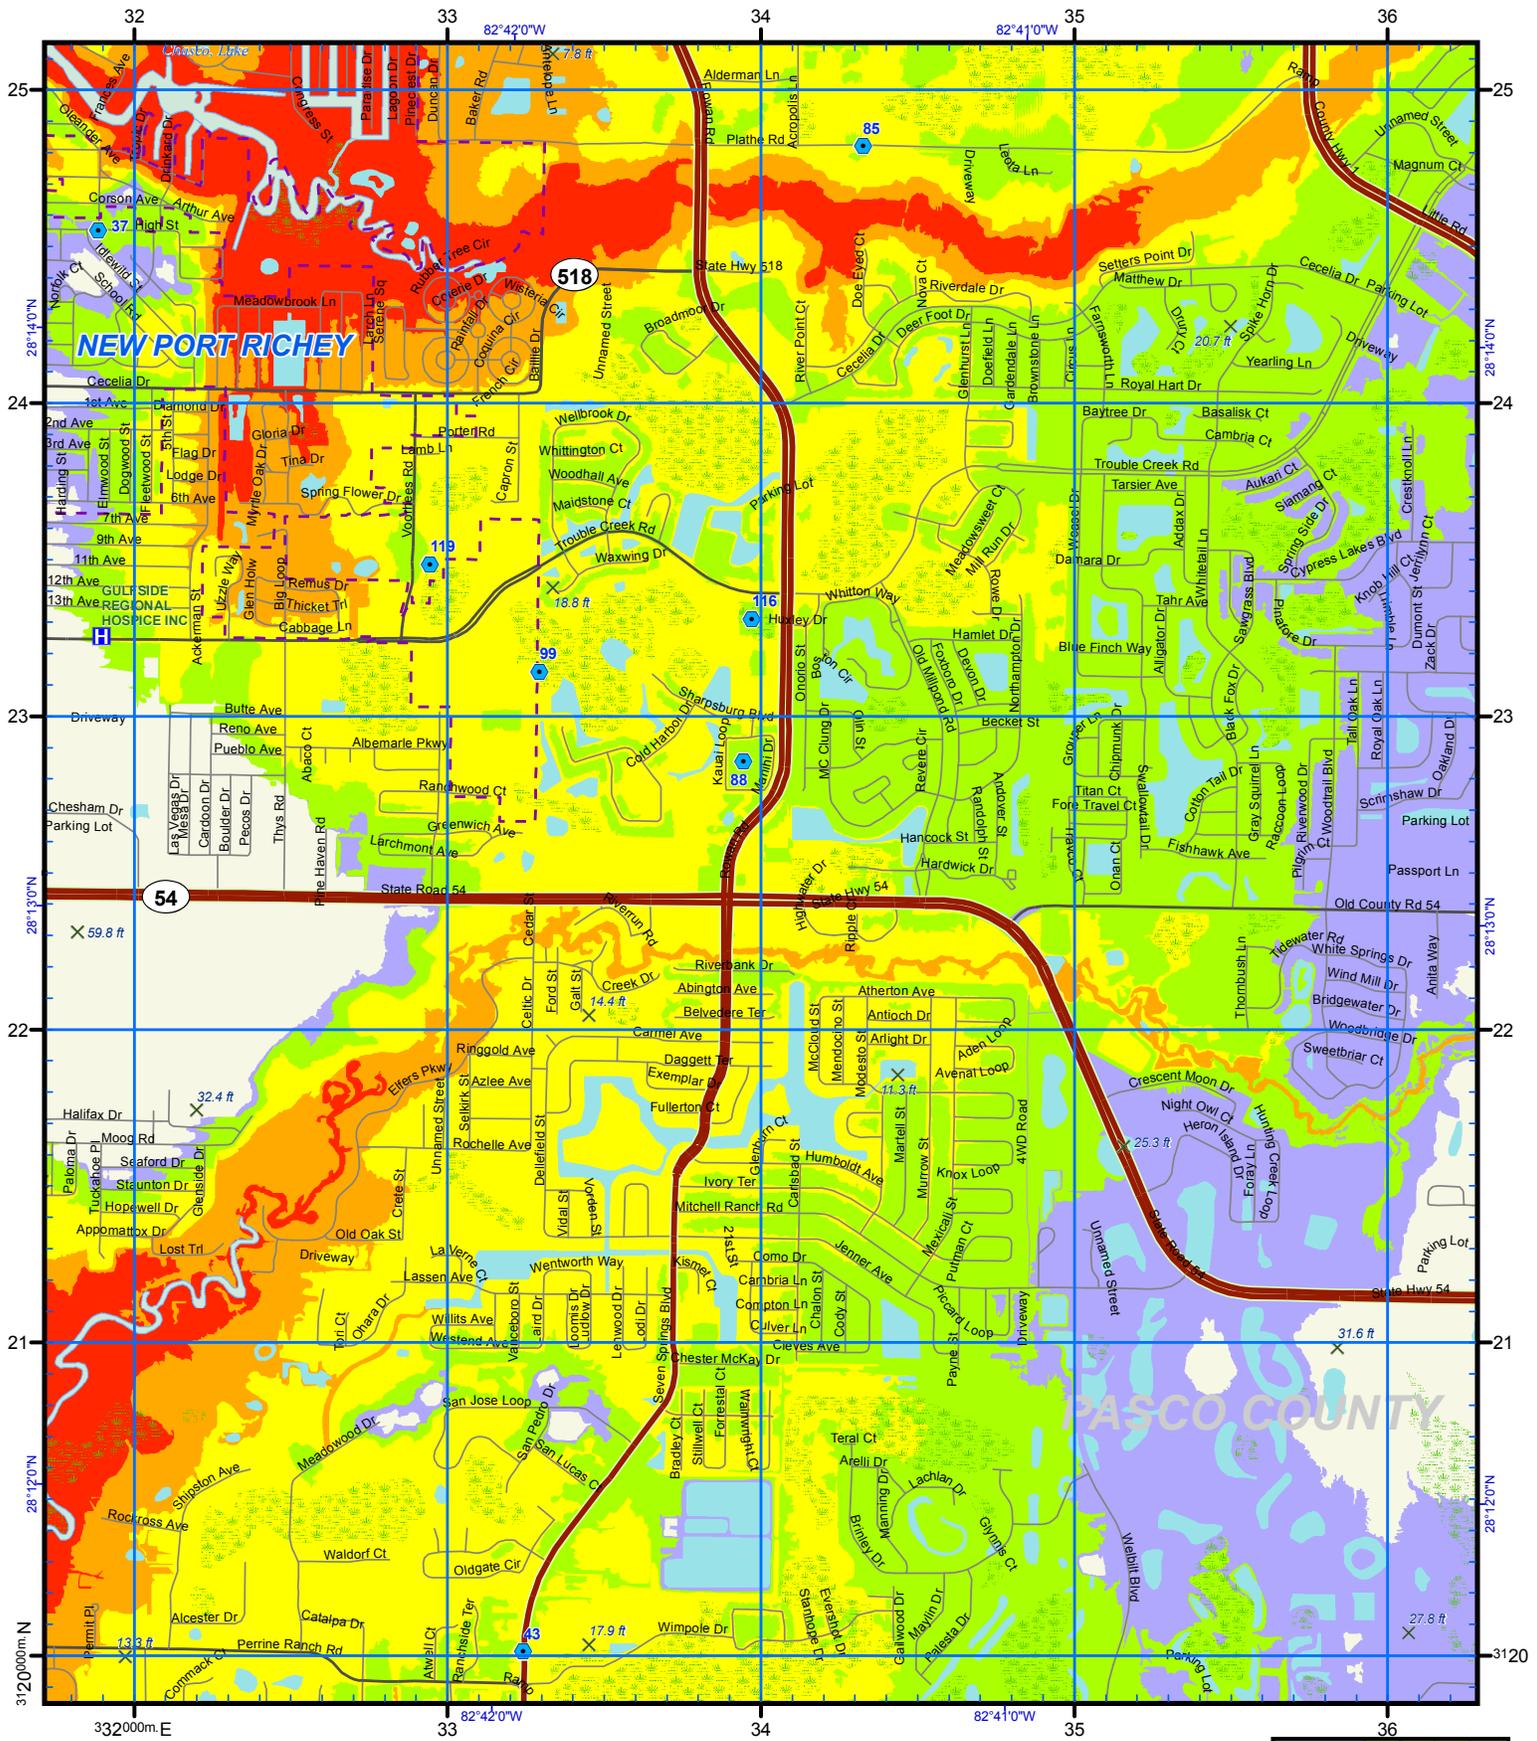

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





- Notes:**
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**

	<b>HOSPITAL</b>		<b>Points of Reference</b>		<b>Evacuation Route</b>		<b>City Limits</b>		<b>NHD Lakes</b>		<b>NHD Major Water</b>
	<b>CAT 1</b>		<b>CAT 2</b>		<b>CAT 3</b>		<b>CAT 4</b>		<b>CAT 5</b>		

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
 0 2,000 Feet  
 USNG Page 17R LM 32 20  
 Map Plate 23

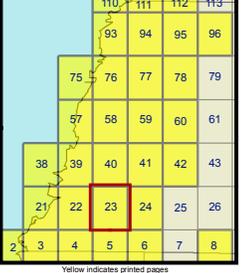

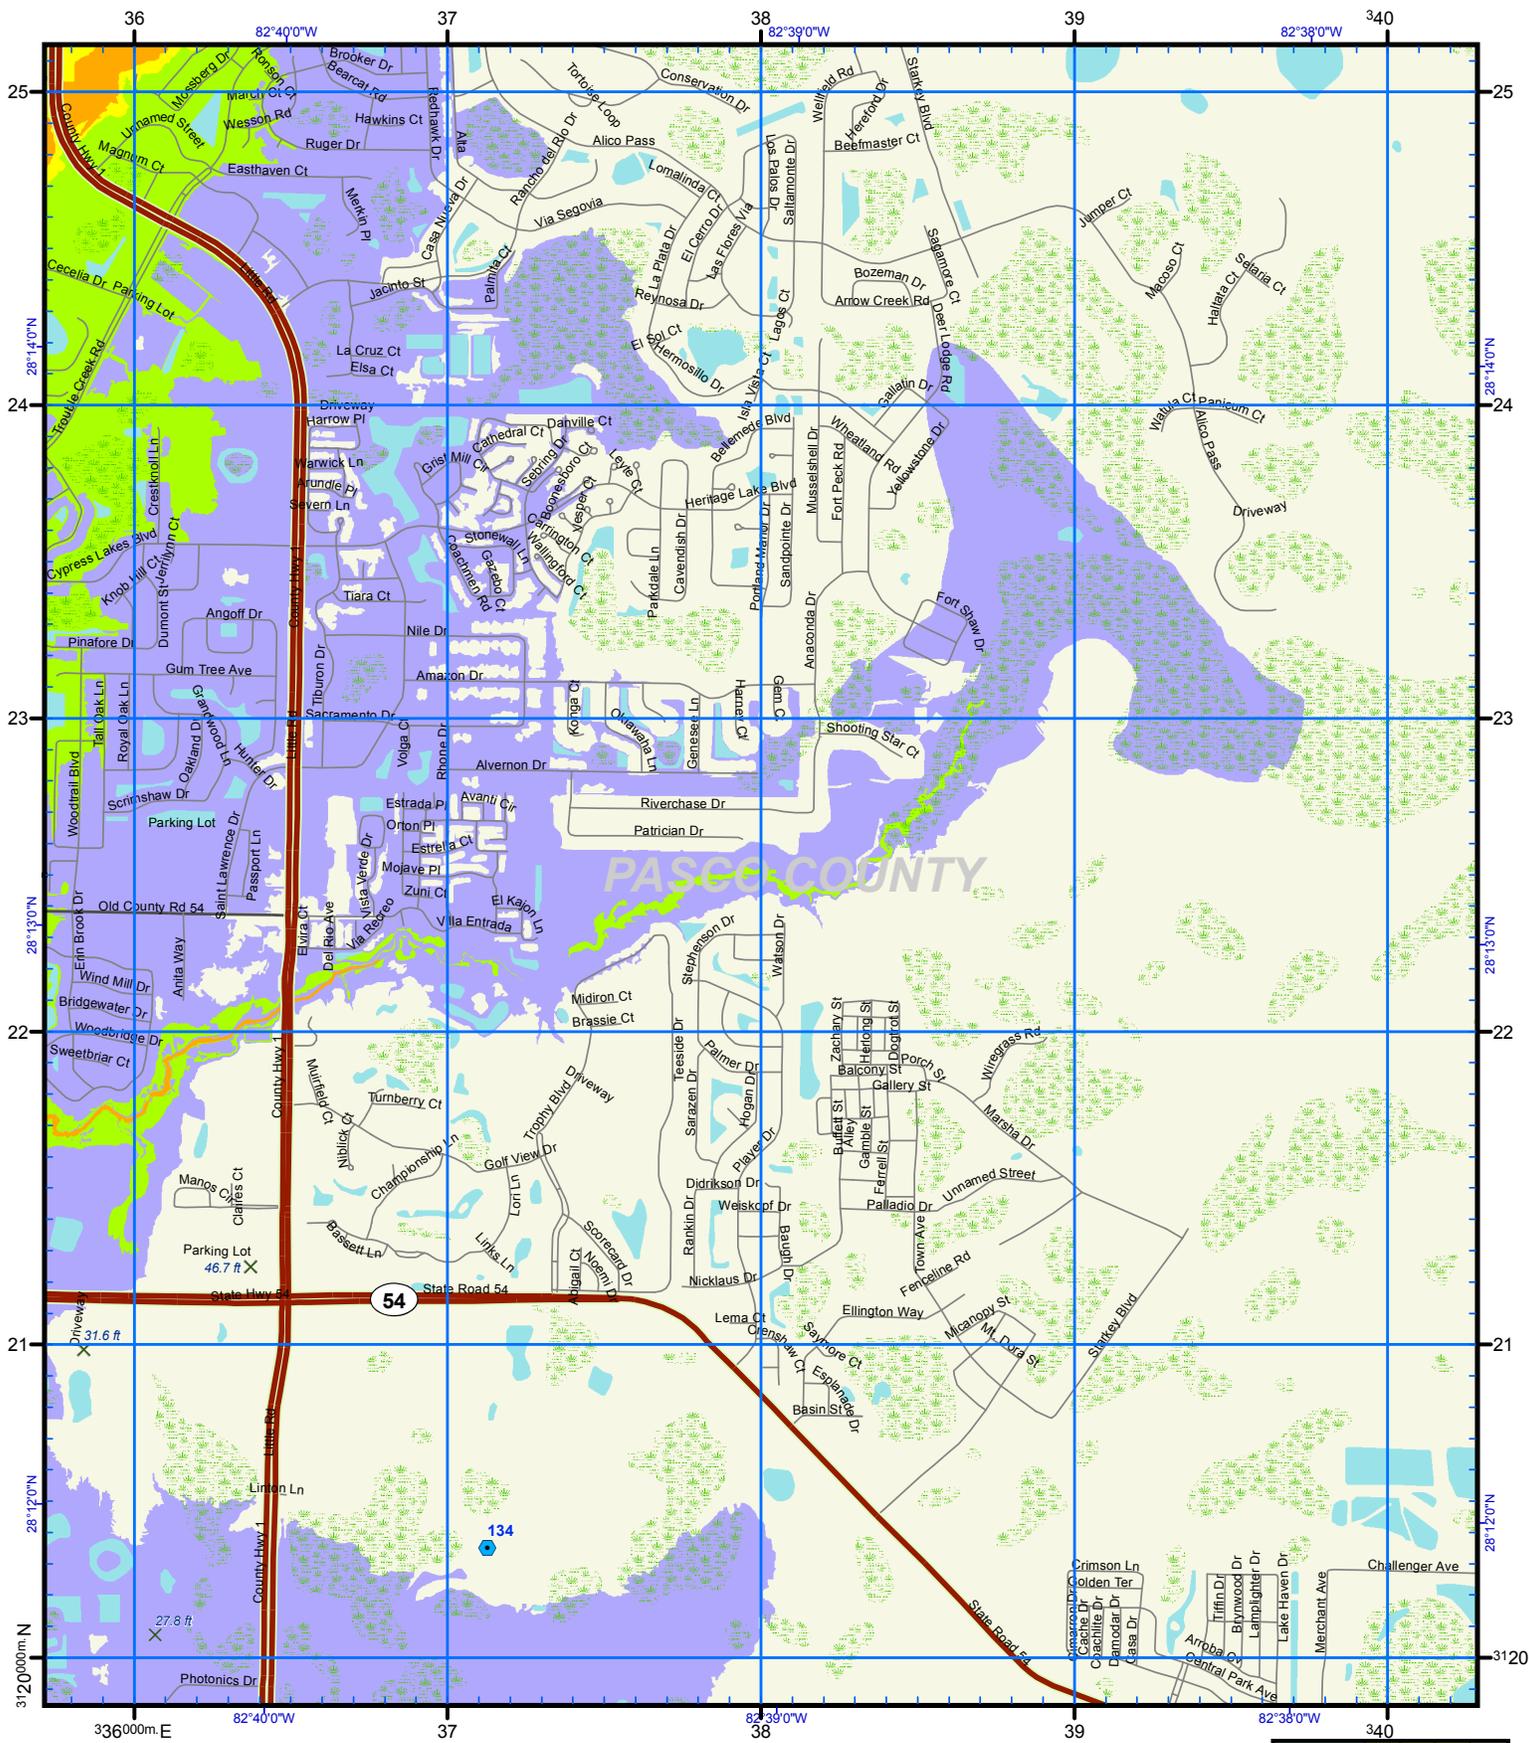

US National Grid  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG




- Notes:
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.


**ATLAS LEGEND**

	HOSPITAL		CAT 1
	Points of Reference		CAT 2
	Evacuation Route		CAT 3
	City Limits		CAT 4
	NHD Lakes		CAT 5
	NHD Major Water		

**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 36 20  
Map Plate 24

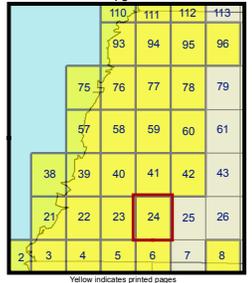

This map is for reference & planning purposes only. Hurricane evacuation decision-making and growth management implementation are local responsibilities. Please consult with local authorities.

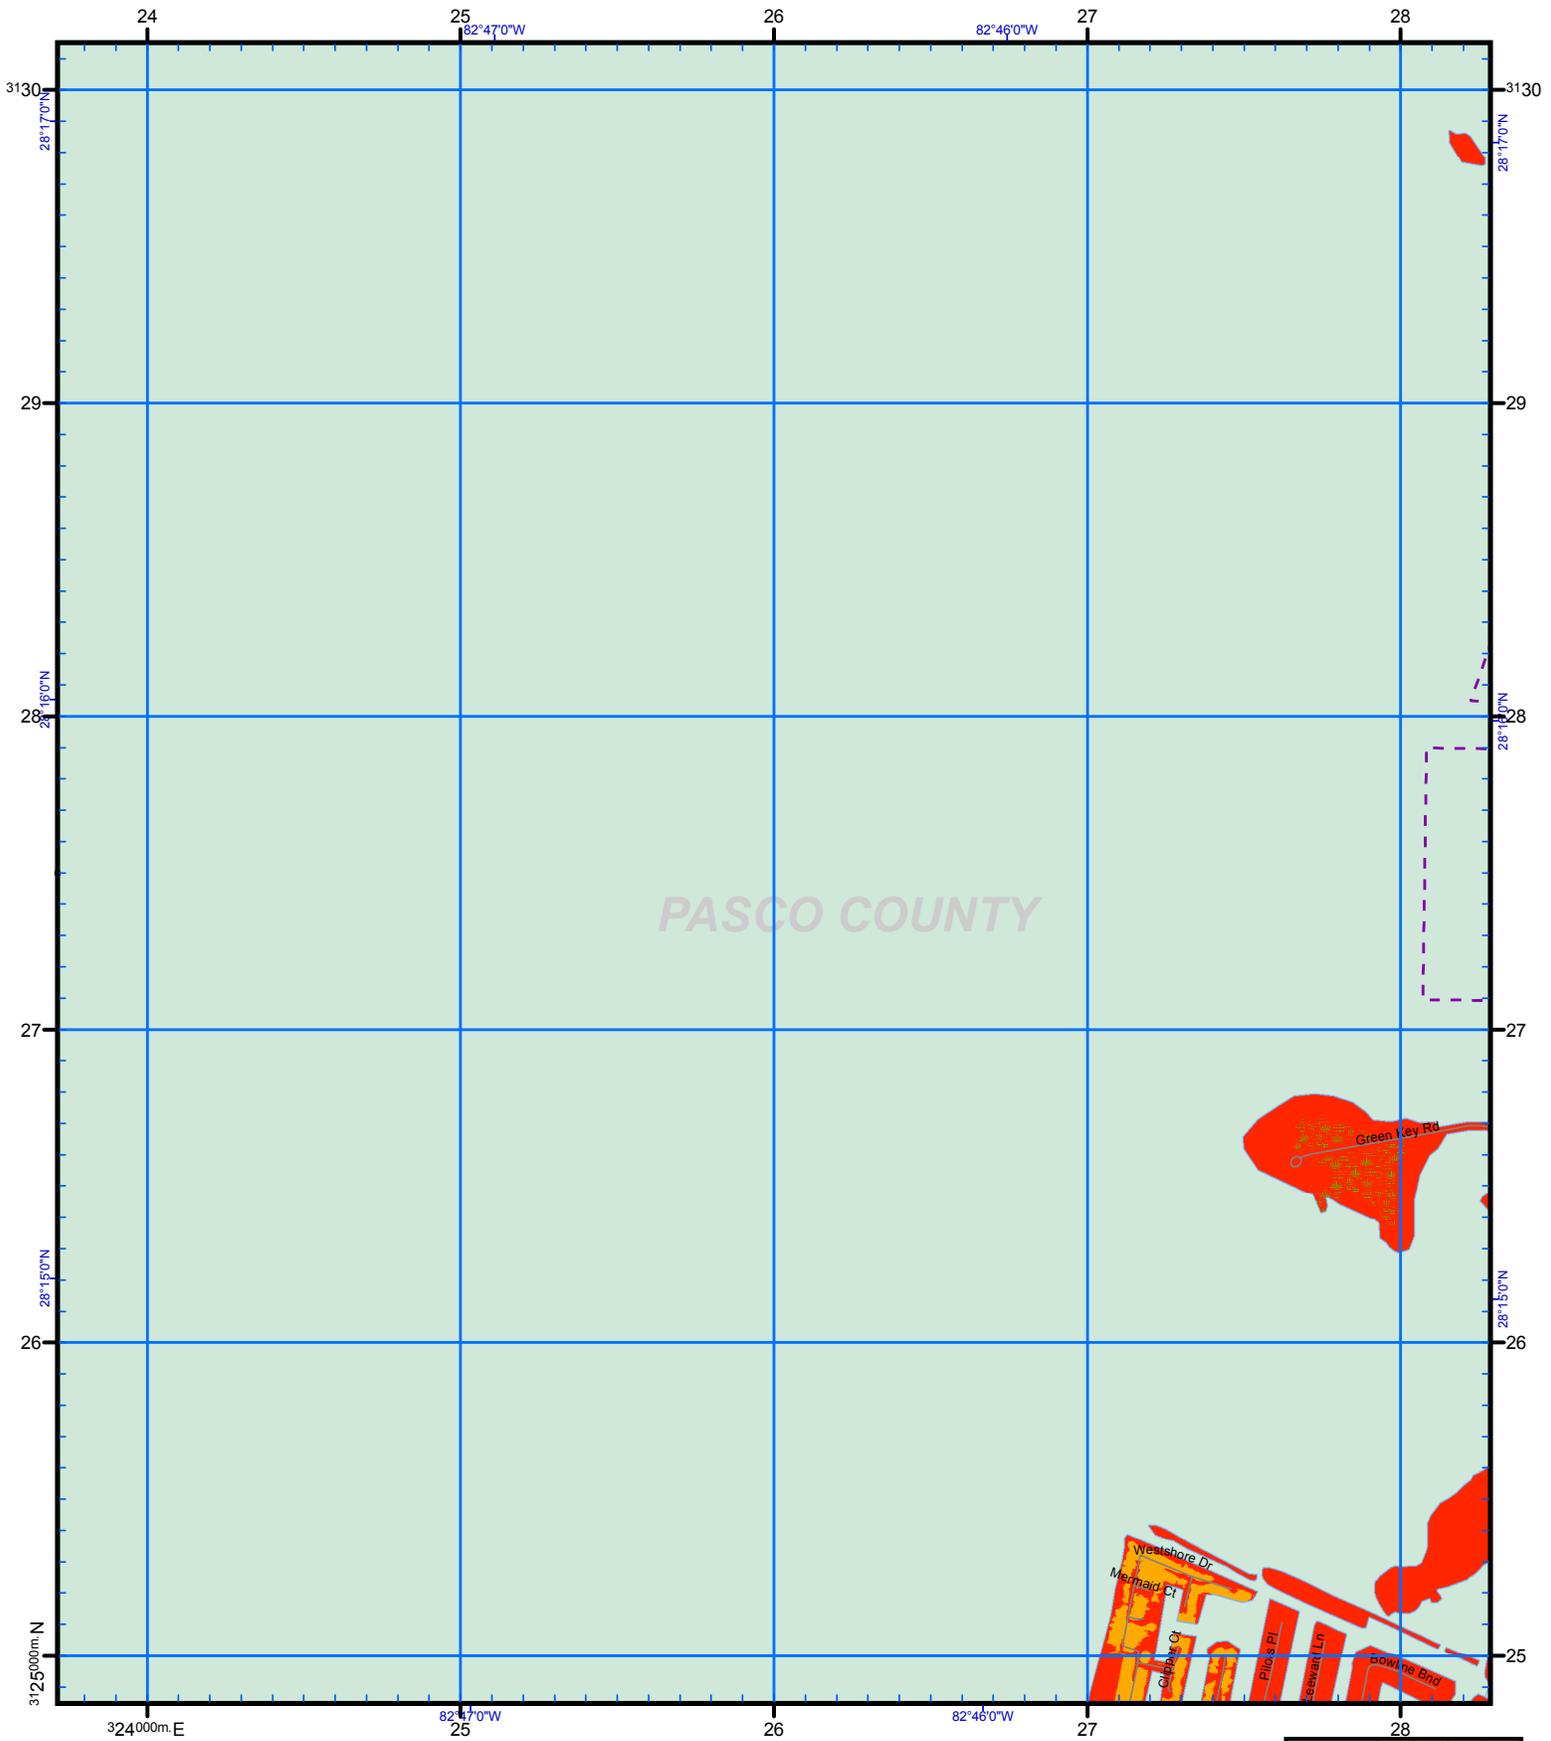

US National Grid  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG

*This map is for reference & planning purposes only. Hurricane evacuation decision-making and growth management implementation are local responsibilities. Please consult with local authorities.*



Notes:  
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**

- |                     |       |
|---------------------|-------|
| HOSPITAL            | CAT 1 |
| Points of Reference | CAT 2 |
| Evacuation Route    | CAT 3 |
| City Limits         | CAT 4 |
| NHD Lakes           | CAT 5 |
| NHD Major Water     |       |


**Storm Tide Zones**  
Pasco County, 2010


Scale - 1:24,000




USNG Page 17R LM 24 25

Map Plate 38

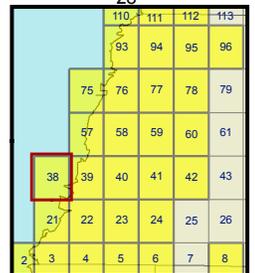

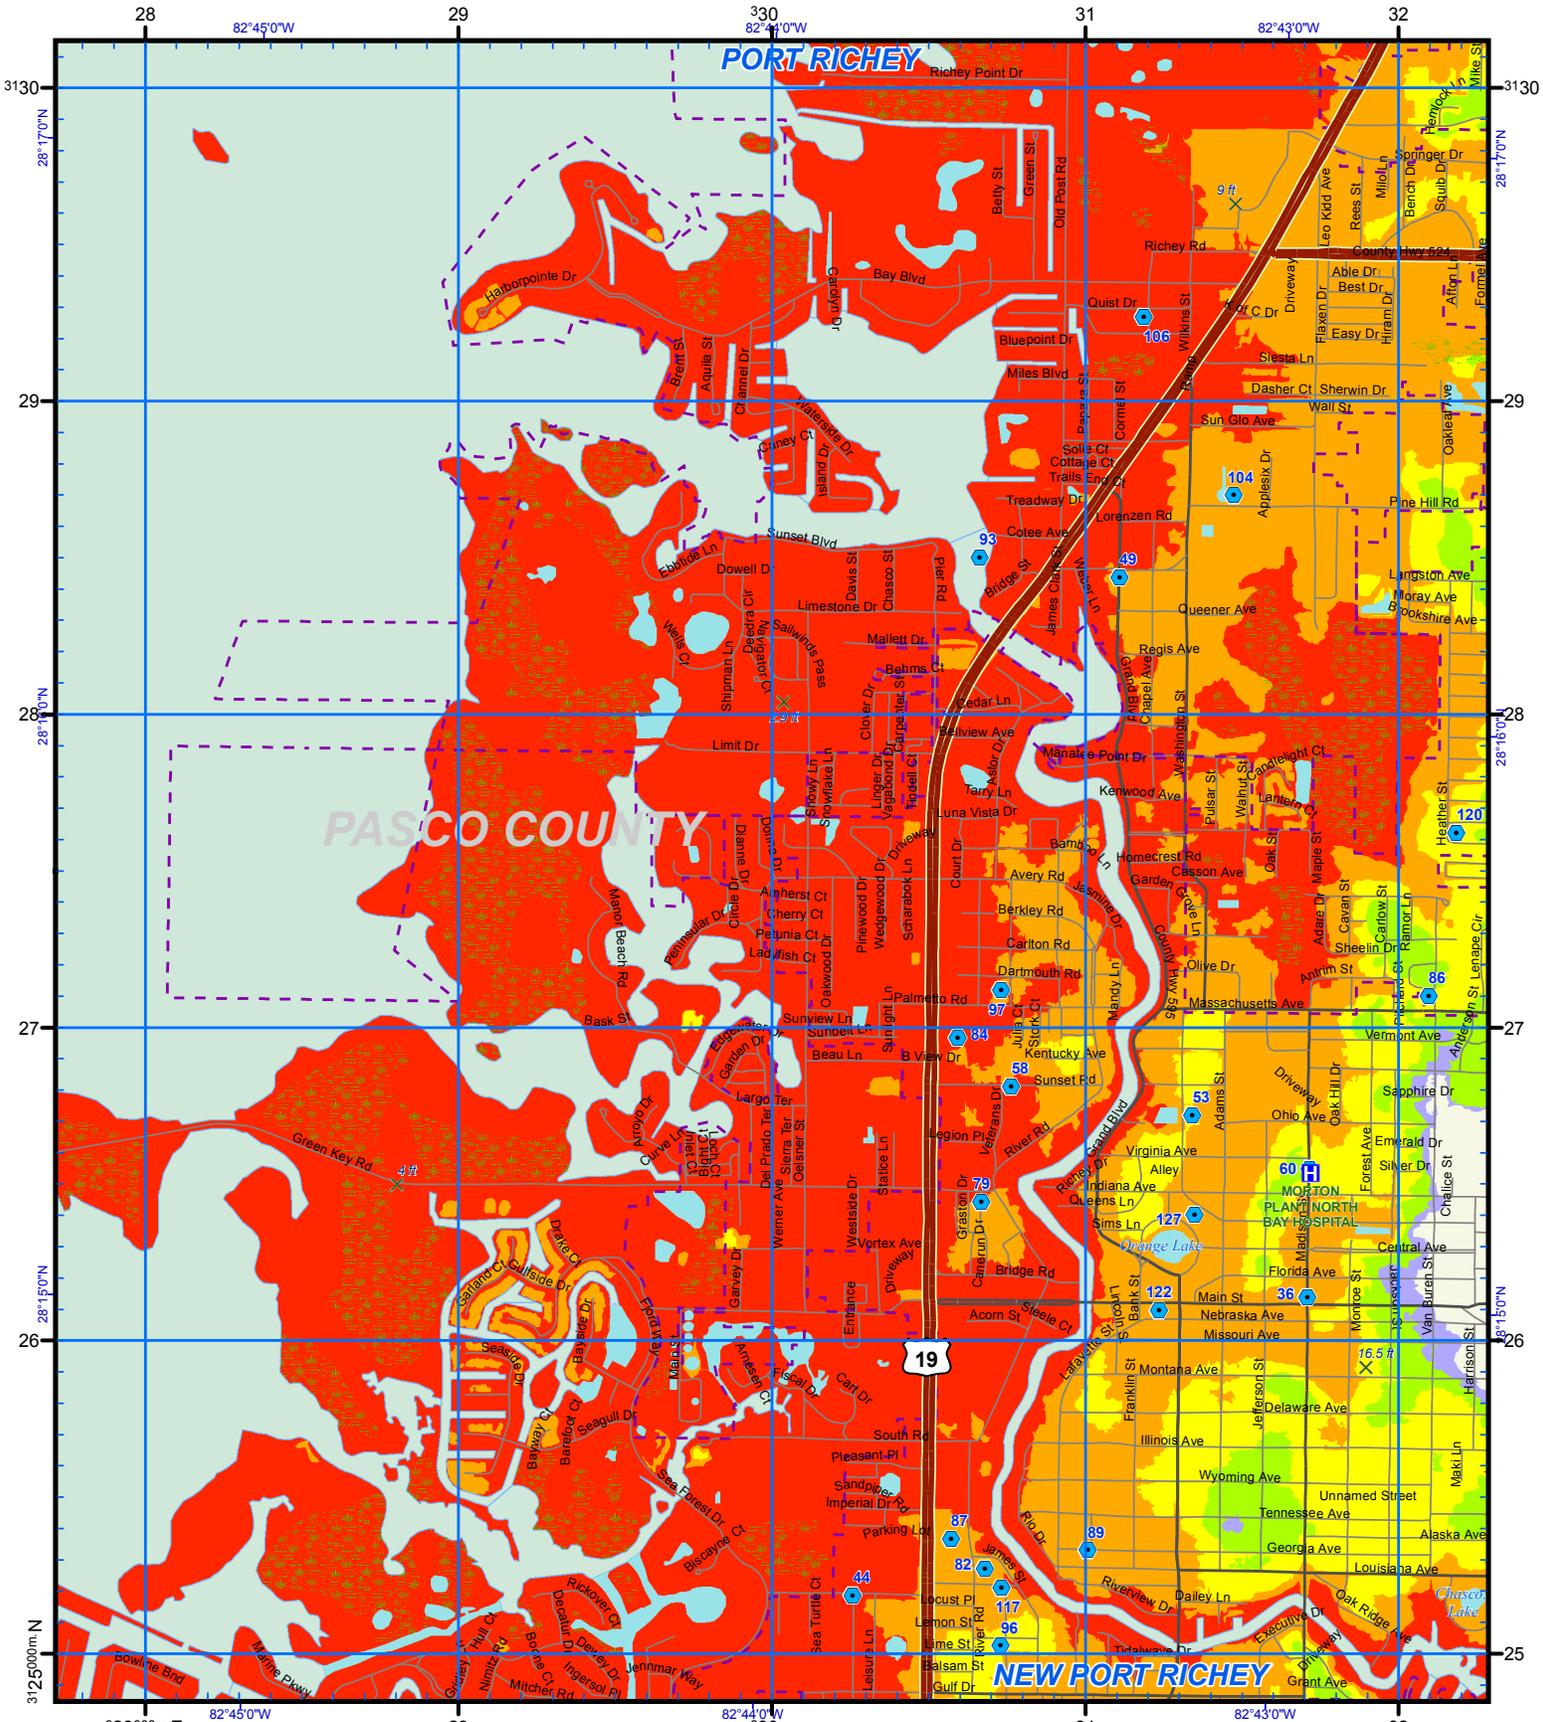

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





- Notes:**
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximum surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
 0 2,000 Feet  
 USNG Page 17R LM 28 25  
 Map Plate 39

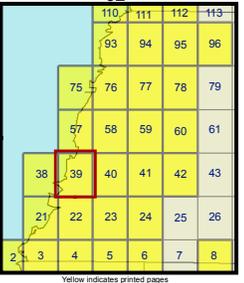

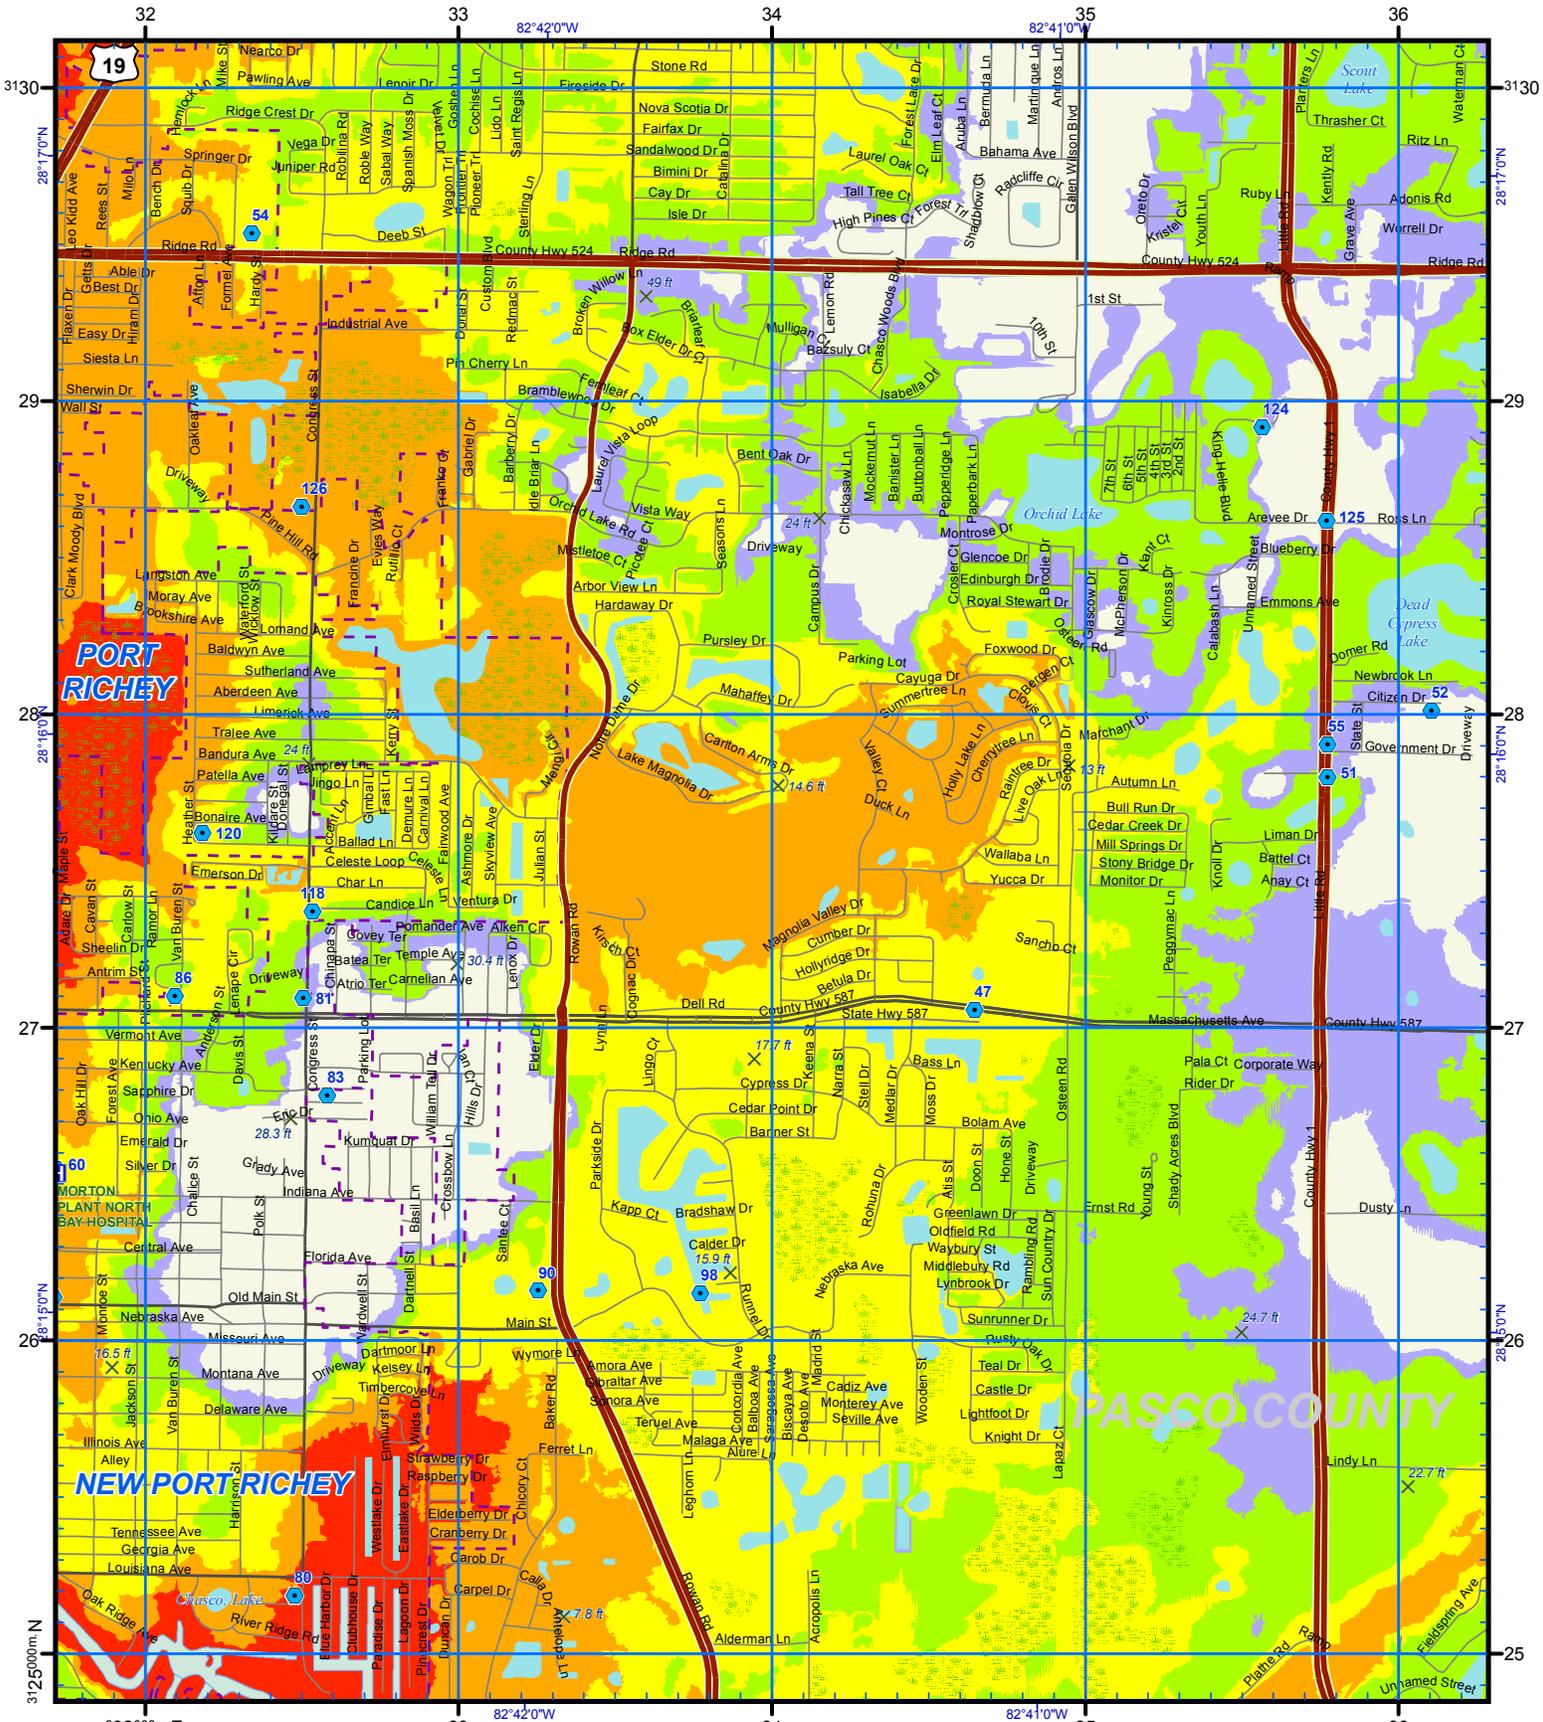

**US National Grid**  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG





**Notes:**  
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


	<b>HOSPITAL</b>	<b>CAT</b>		<b>1</b>
	<b>Points of Reference</b>		<b>2</b>	
	<b>Evacuation Route</b>		<b>3</b>	
	<b>City Limits</b>		<b>4</b>	
	<b>NHD Lakes</b>		<b>5</b>	
	<b>NHD Major Water</b>			

**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 32 25  
Map Plate 40

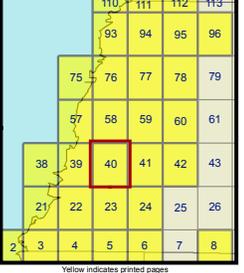

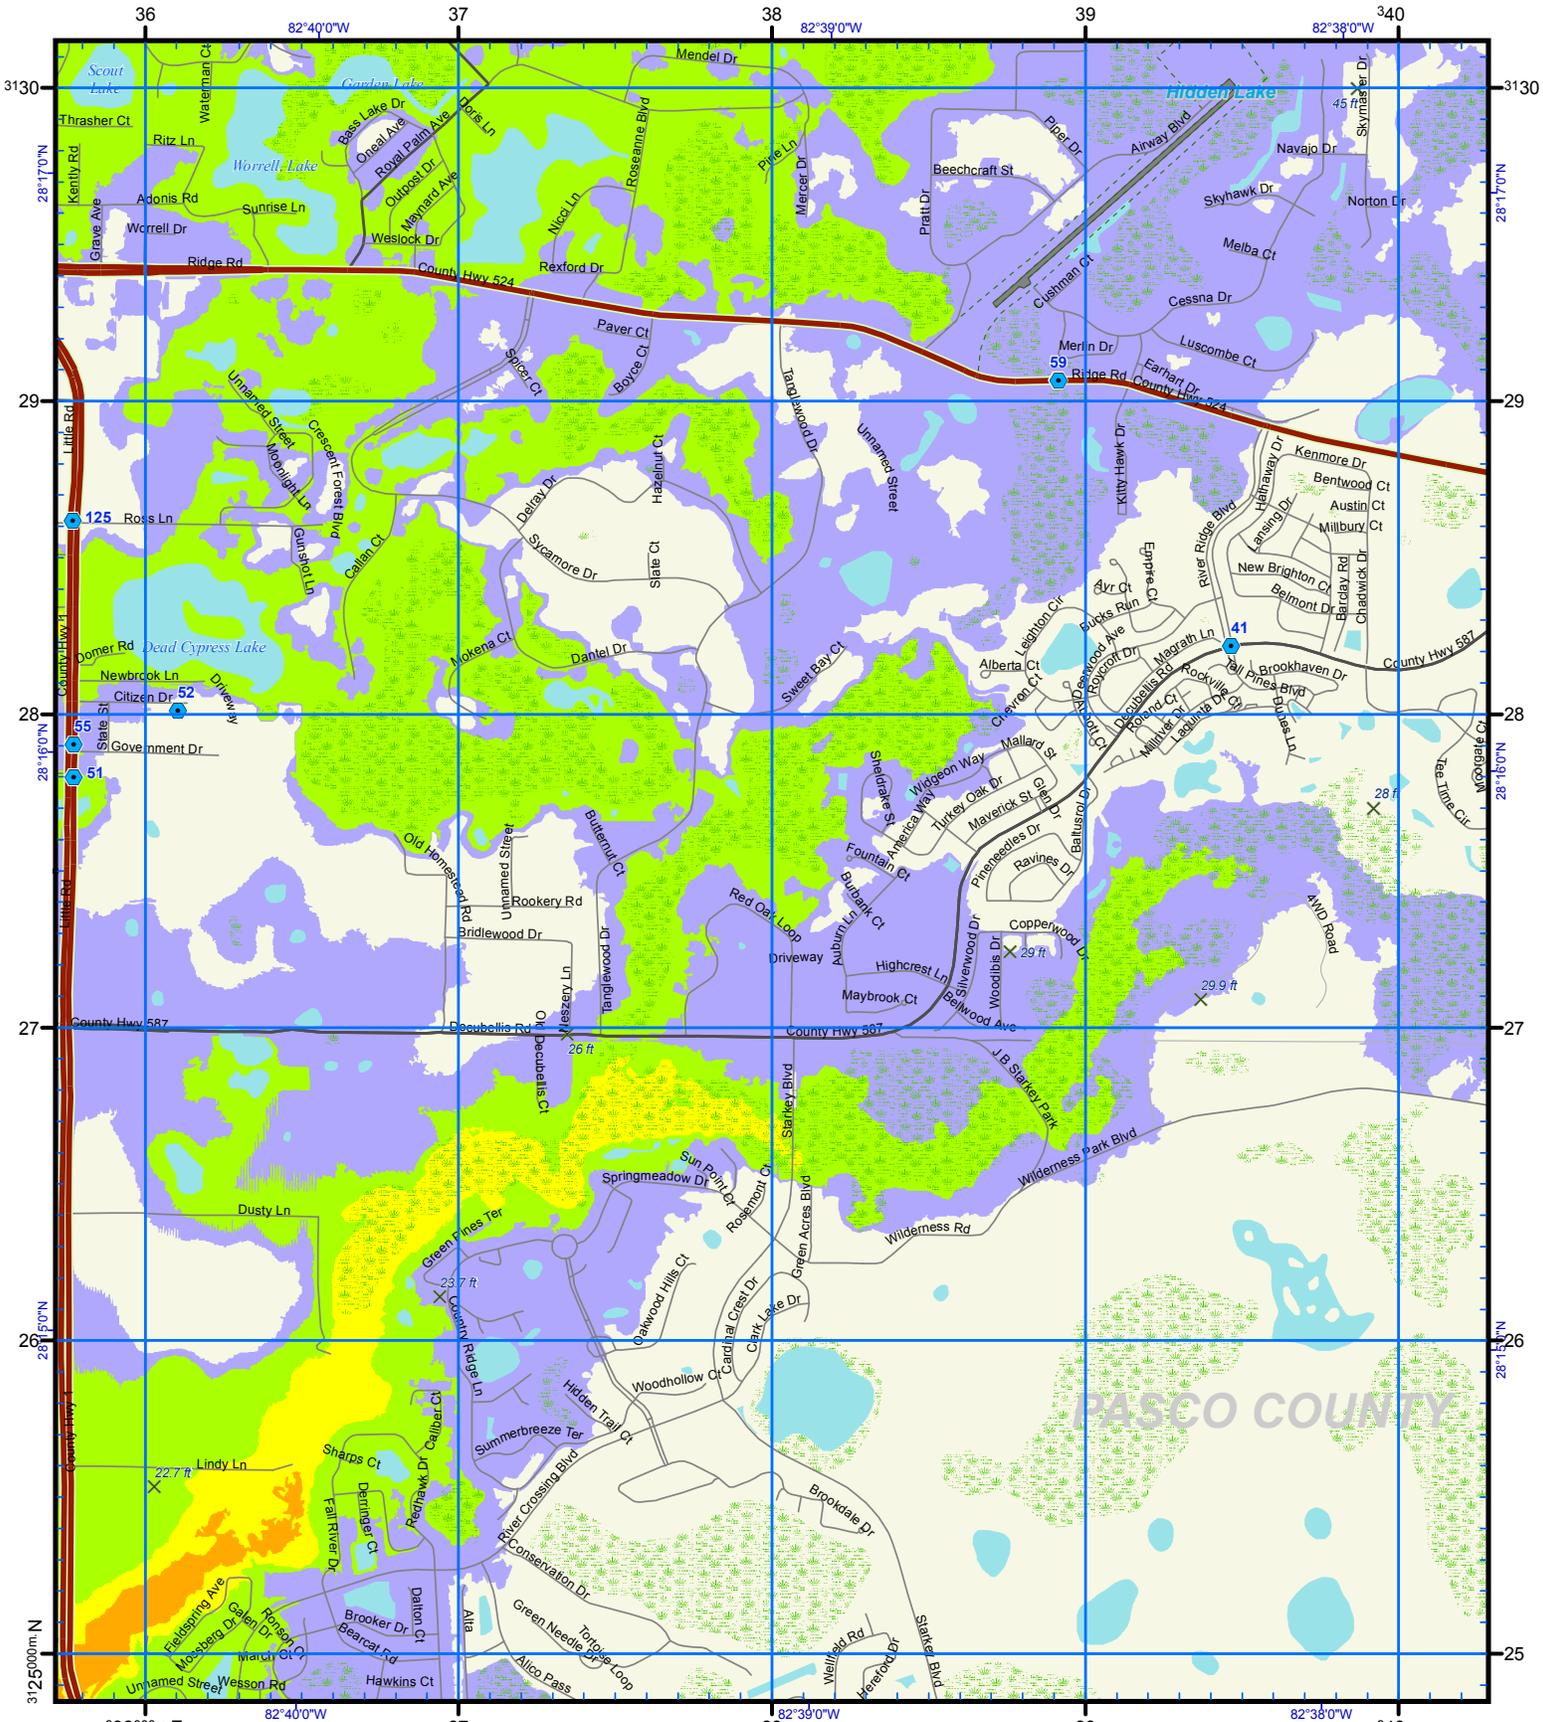

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





- Notes:**
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximum surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
 0 2,000 Feet  
 USNG Page 17R LM 36 25  
 Map Plate 41

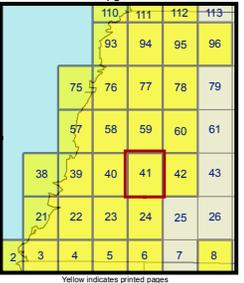

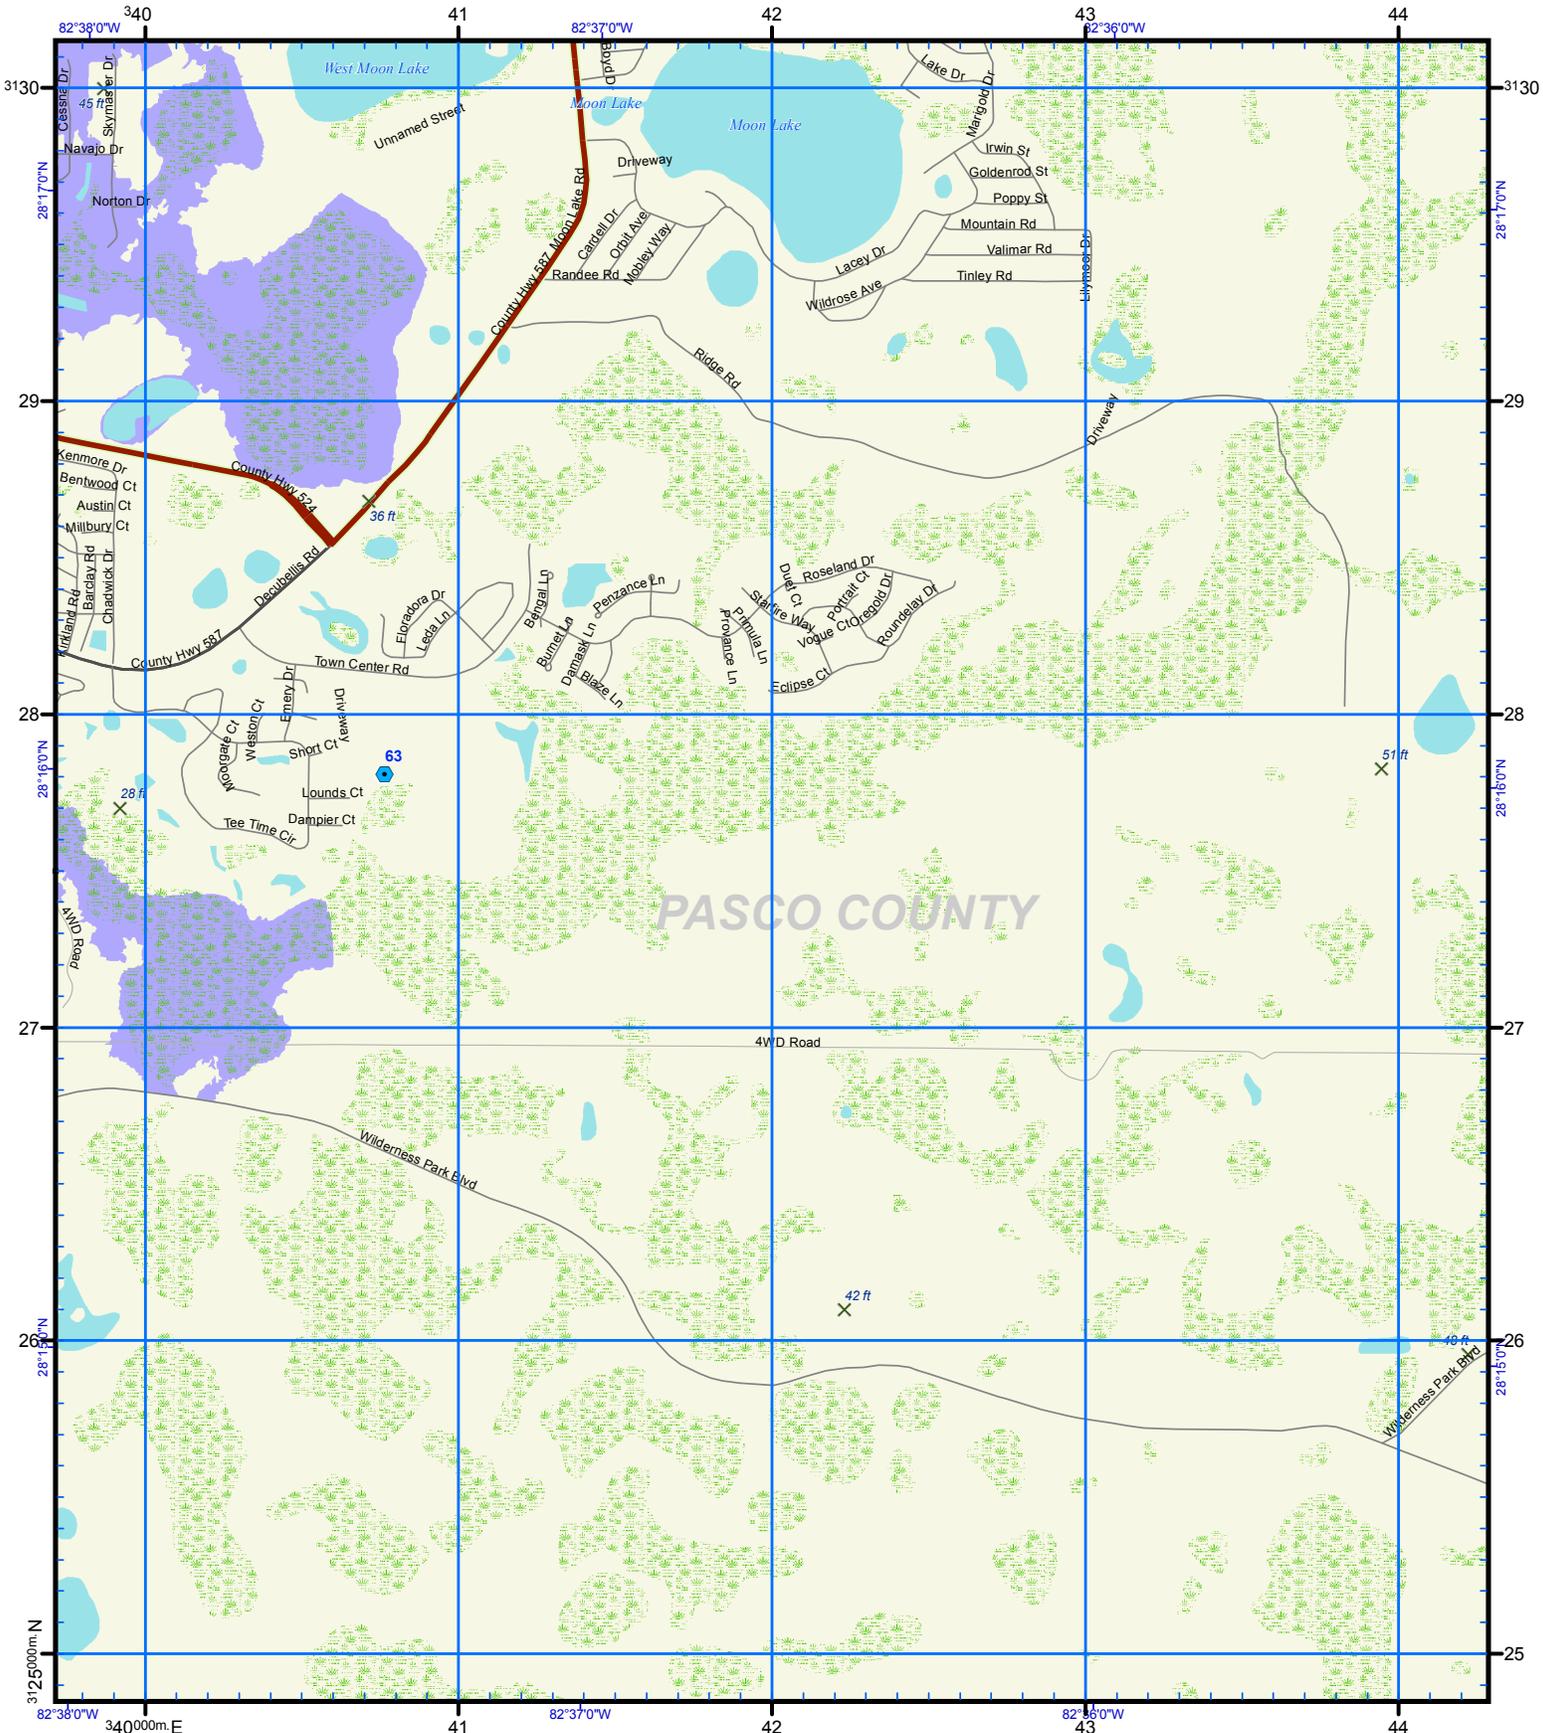

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





**Notes:**  
 1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
 2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
 3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
 0 2,000 Feet  
 USNG Page 17R LM 40 25  
 Map Plate 42

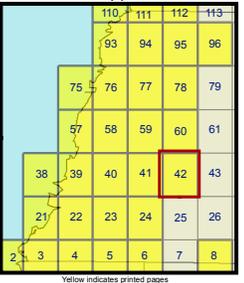

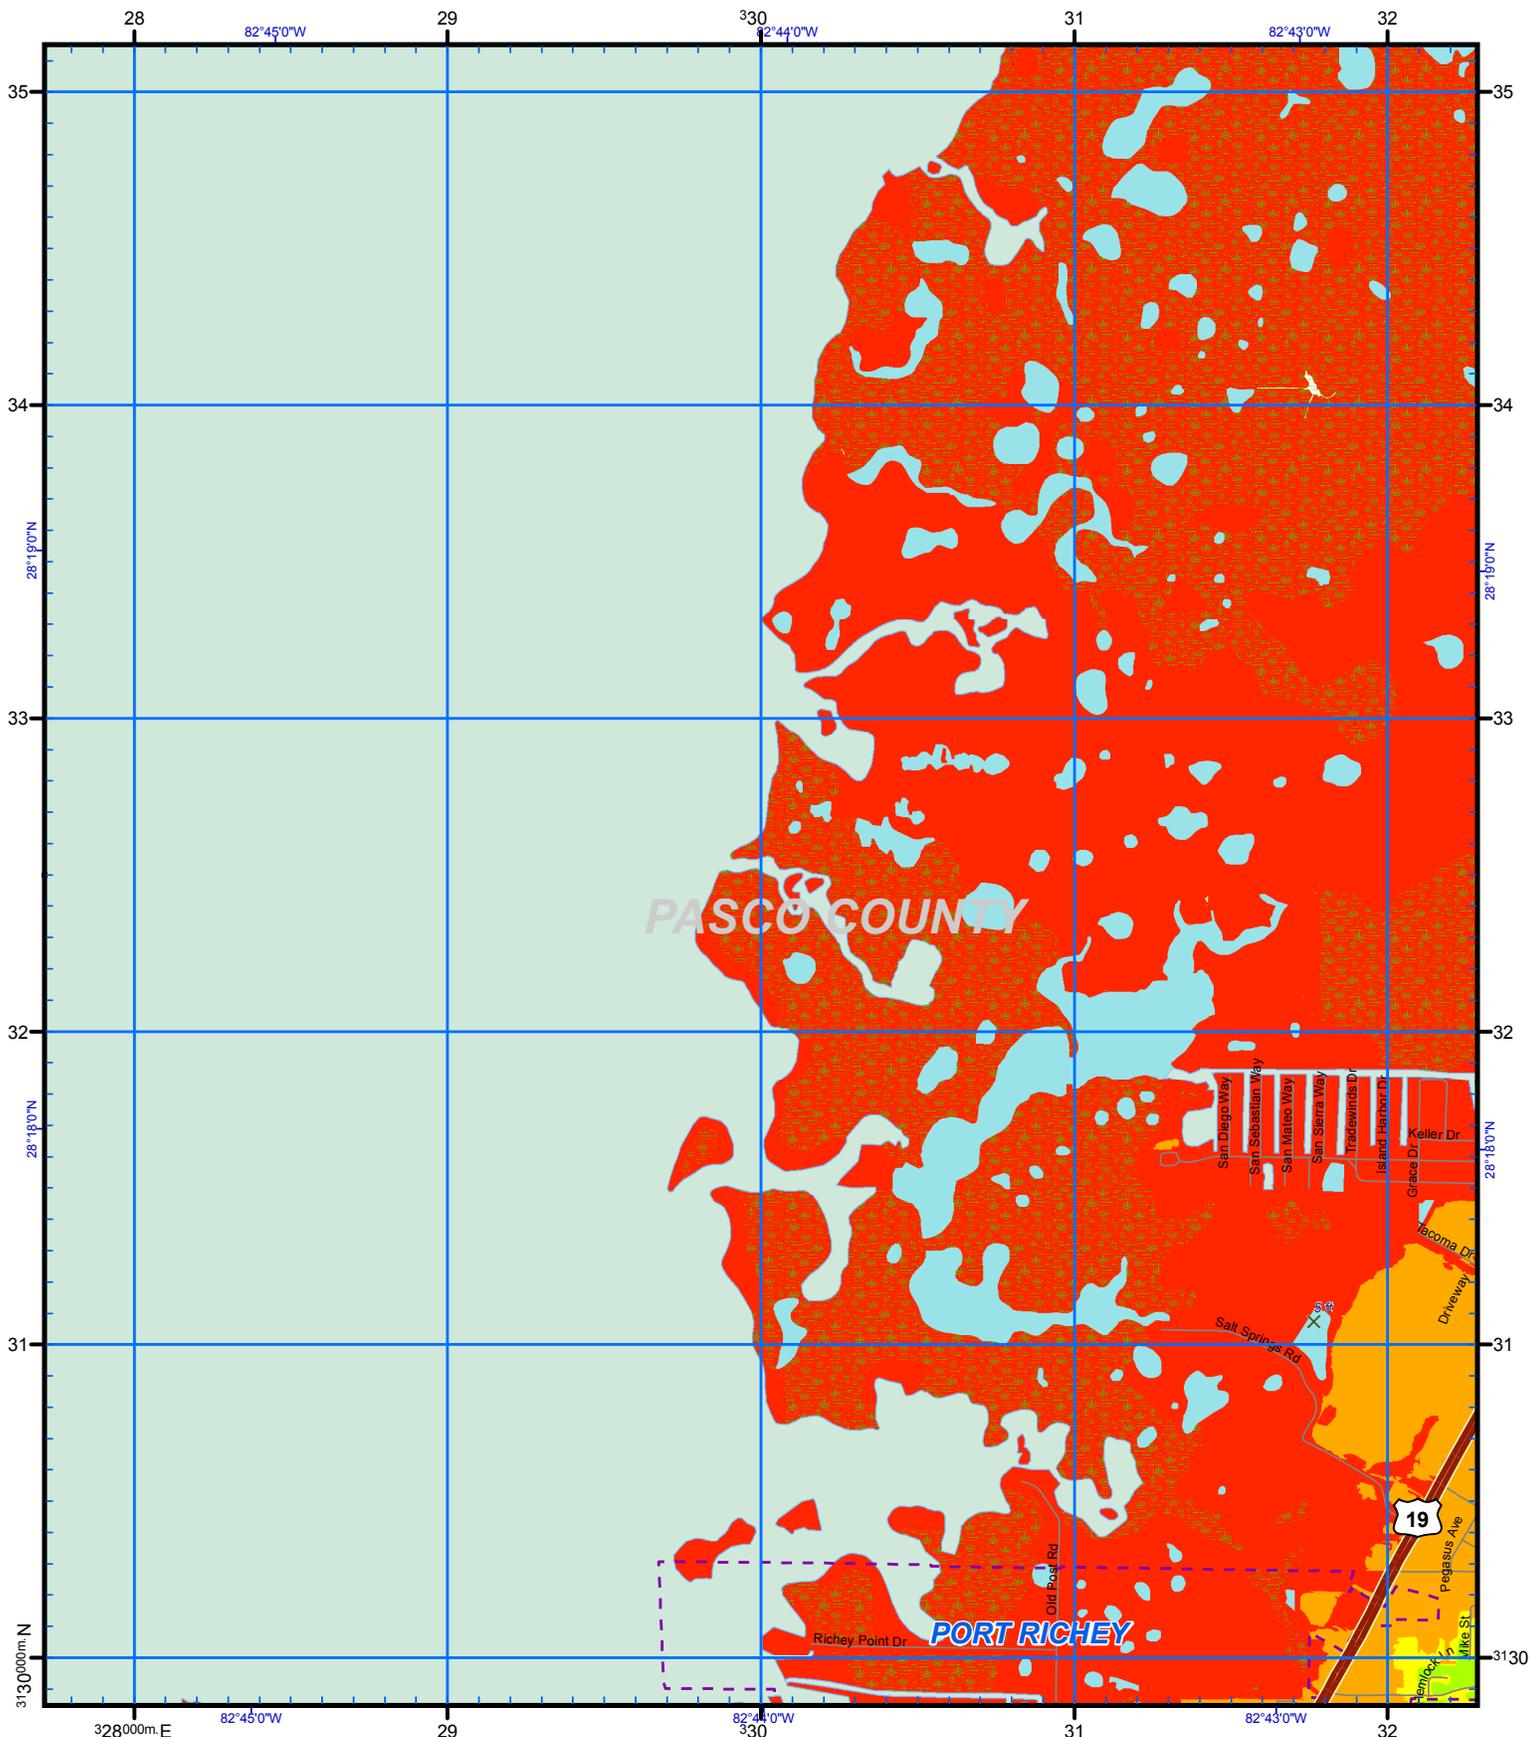


US National Grid  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG




Notes:  
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
3. The Points of Reference are locations determined to be relevant to emergency management officials.

ATLAS LEGEND		CAT	
	HOSPITAL		1
	Points of Reference		2
	Evacuation Route		3
	City Limits		4
	NHD Lakes		5
	NHD Major Water		

**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 28 30  
Map Plate 57

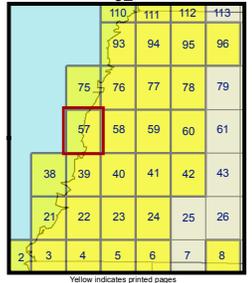


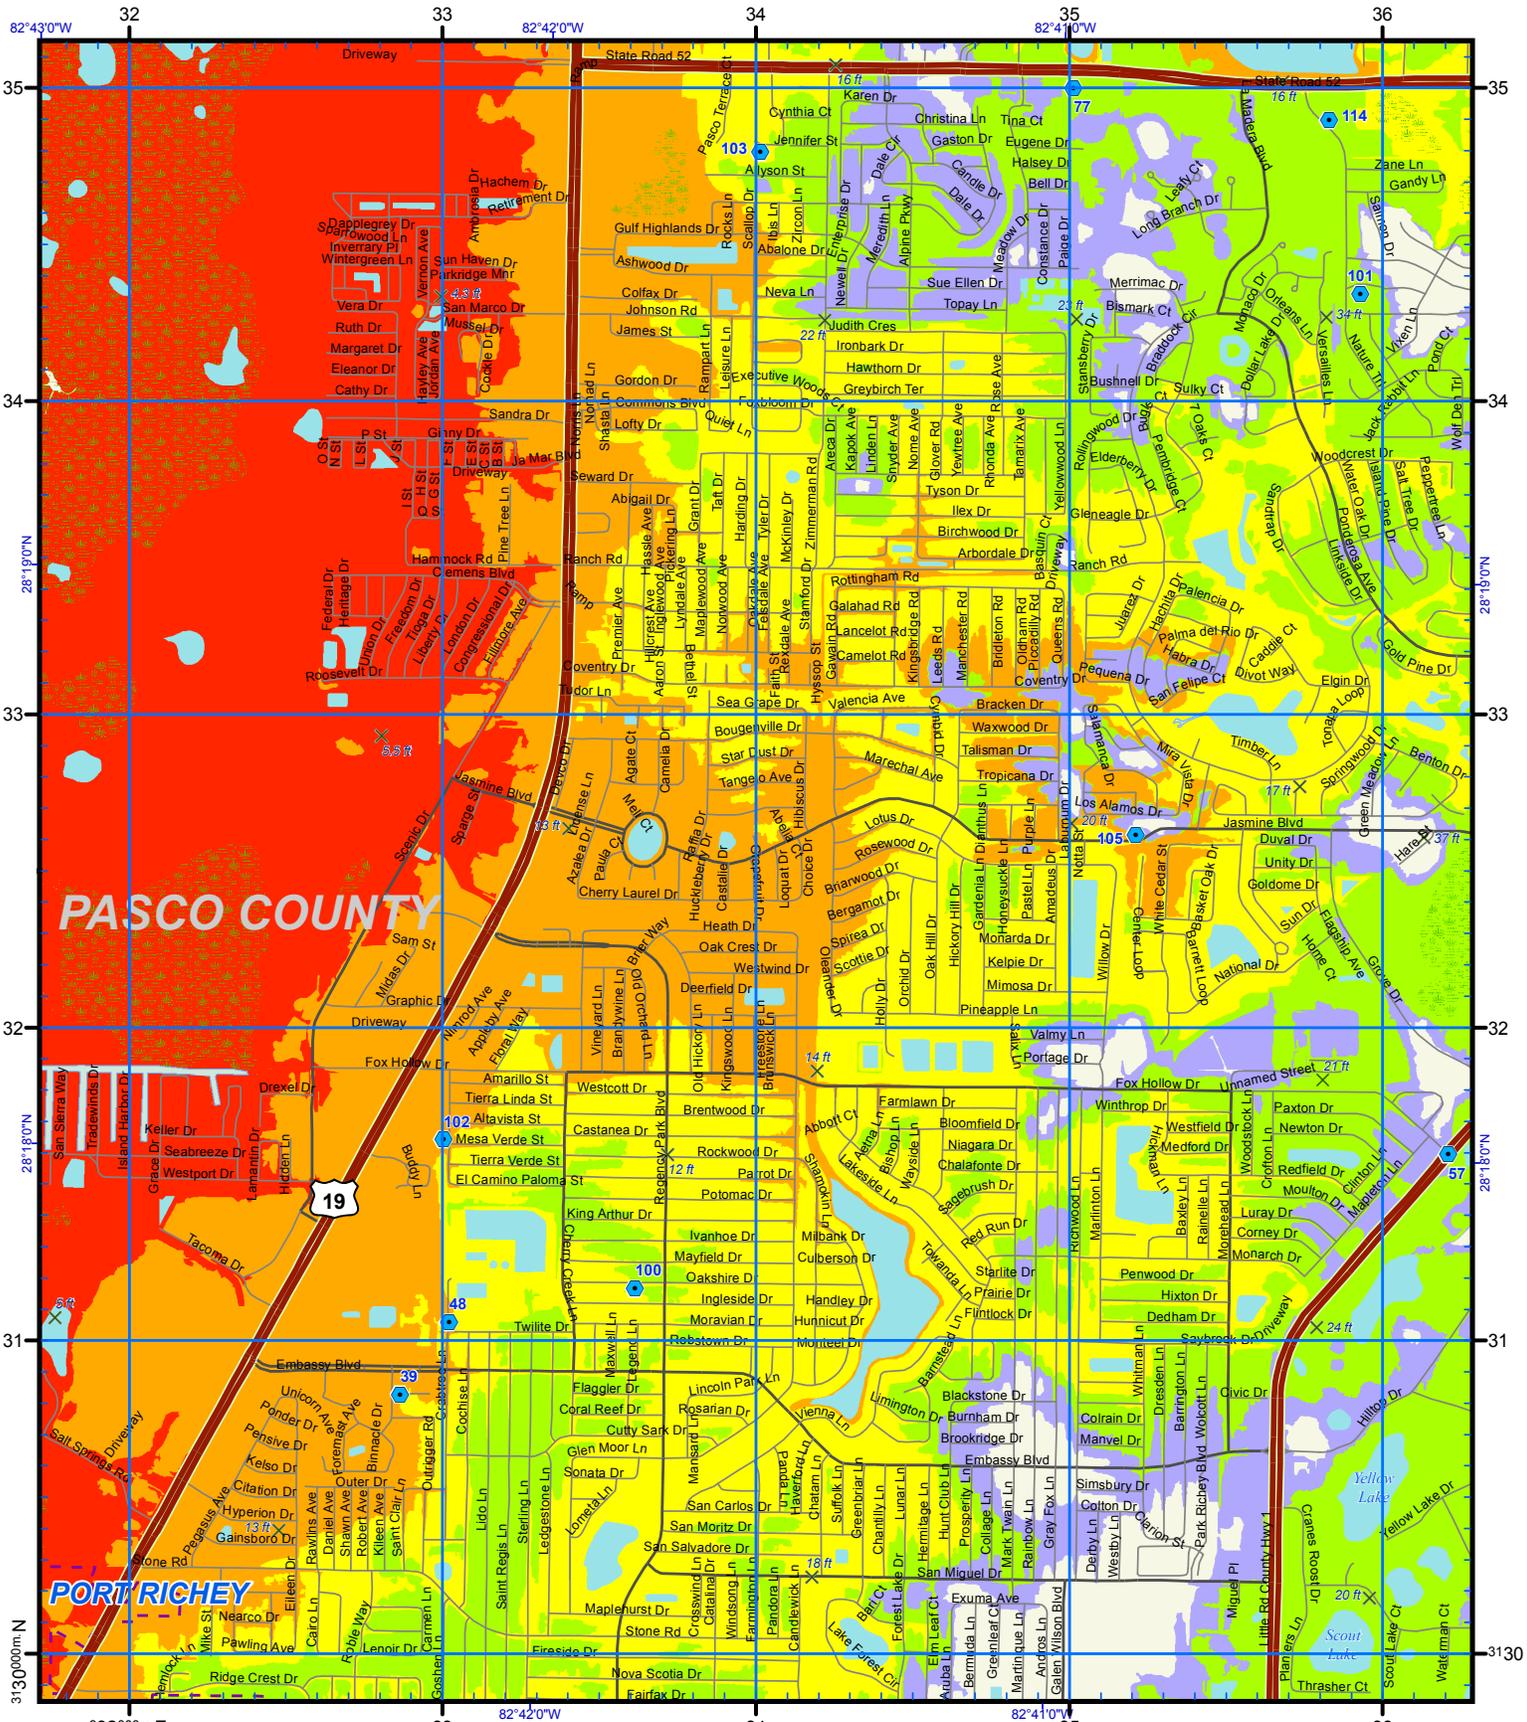

**PASCO COUNTY**

**PORT RICHEY**

**US National Grid**  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG





- Notes:
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximum surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 32 30  
Map Plate 58

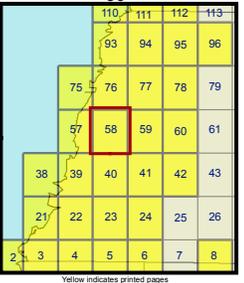

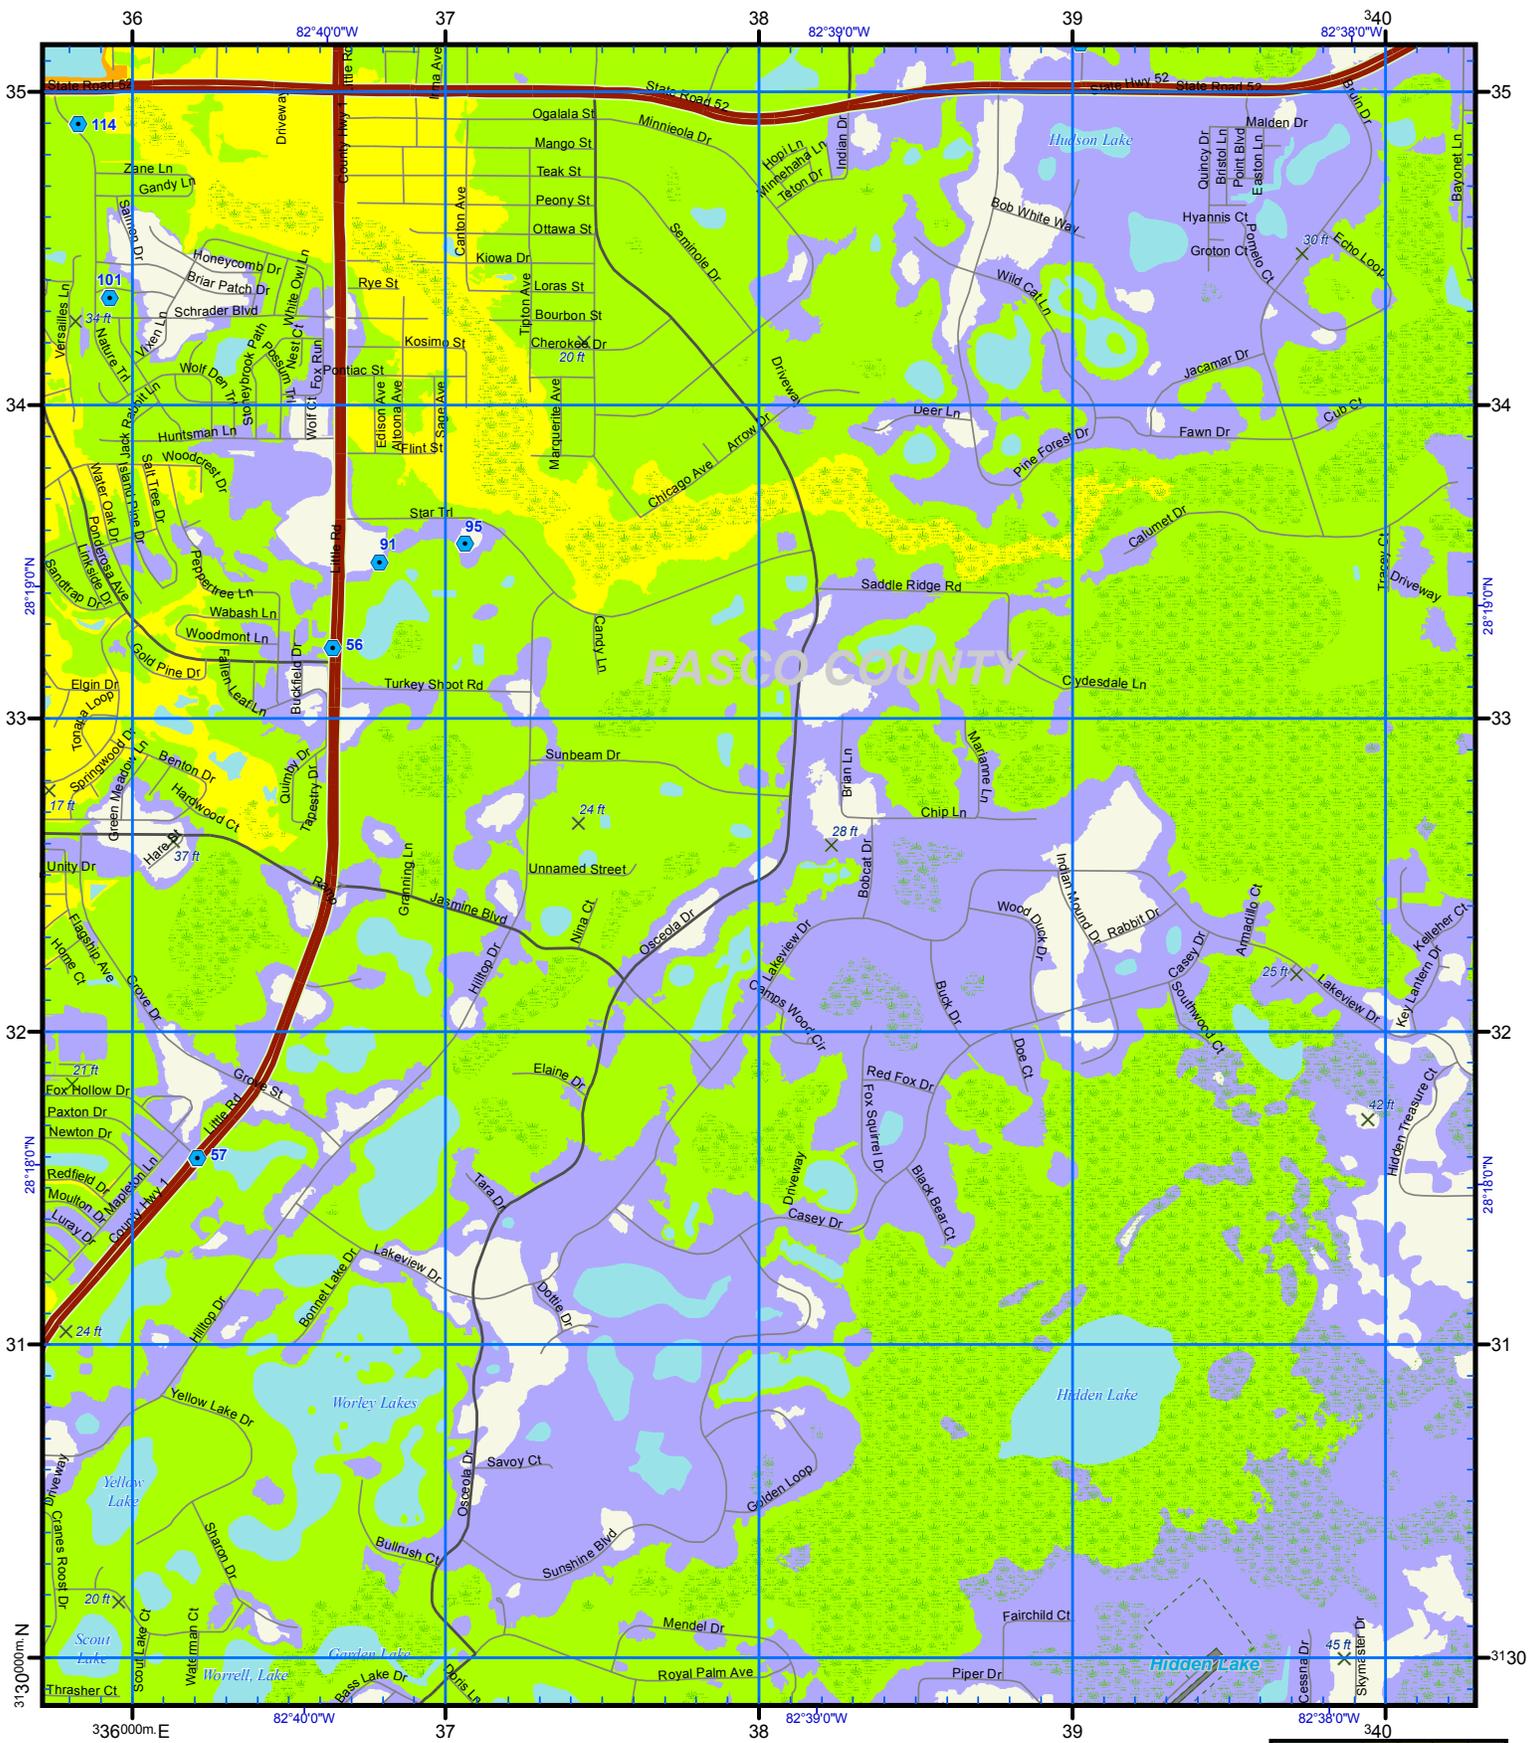

**US National Grid**  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG





- Notes:
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**

HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 36 30  
Map Plate 59

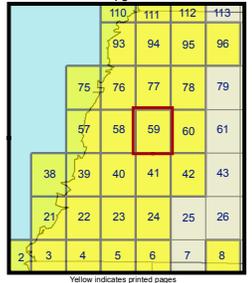

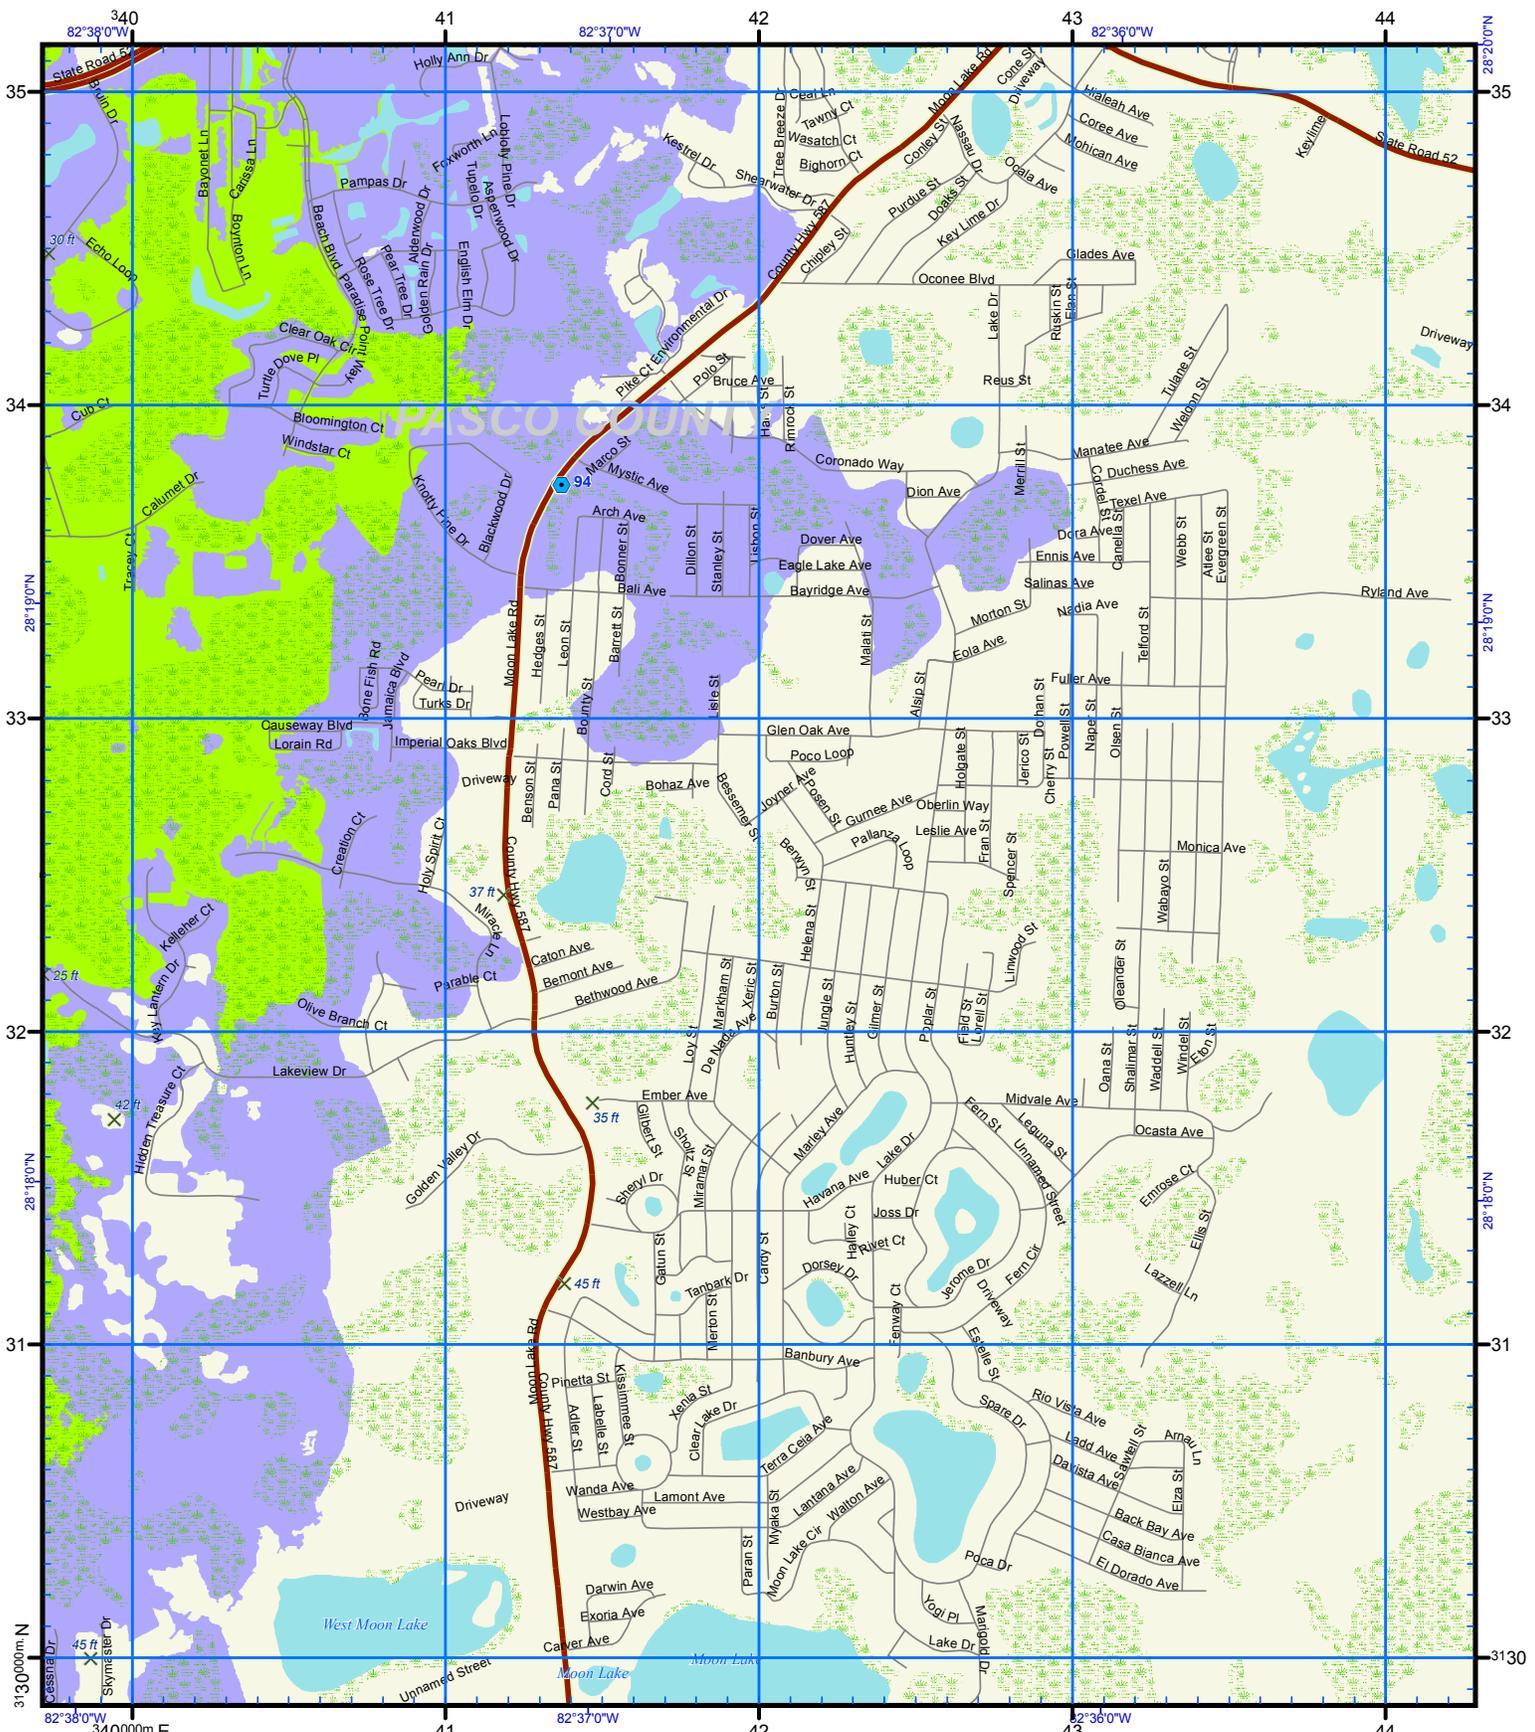

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





**Notes:**  
 1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
 2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
 3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
 0 2,000 Feet  
 USNG Page 17R LM 40 30  
 Map Plate 60

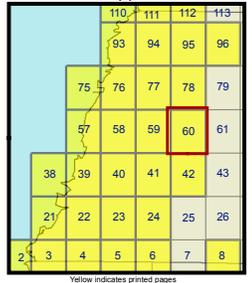

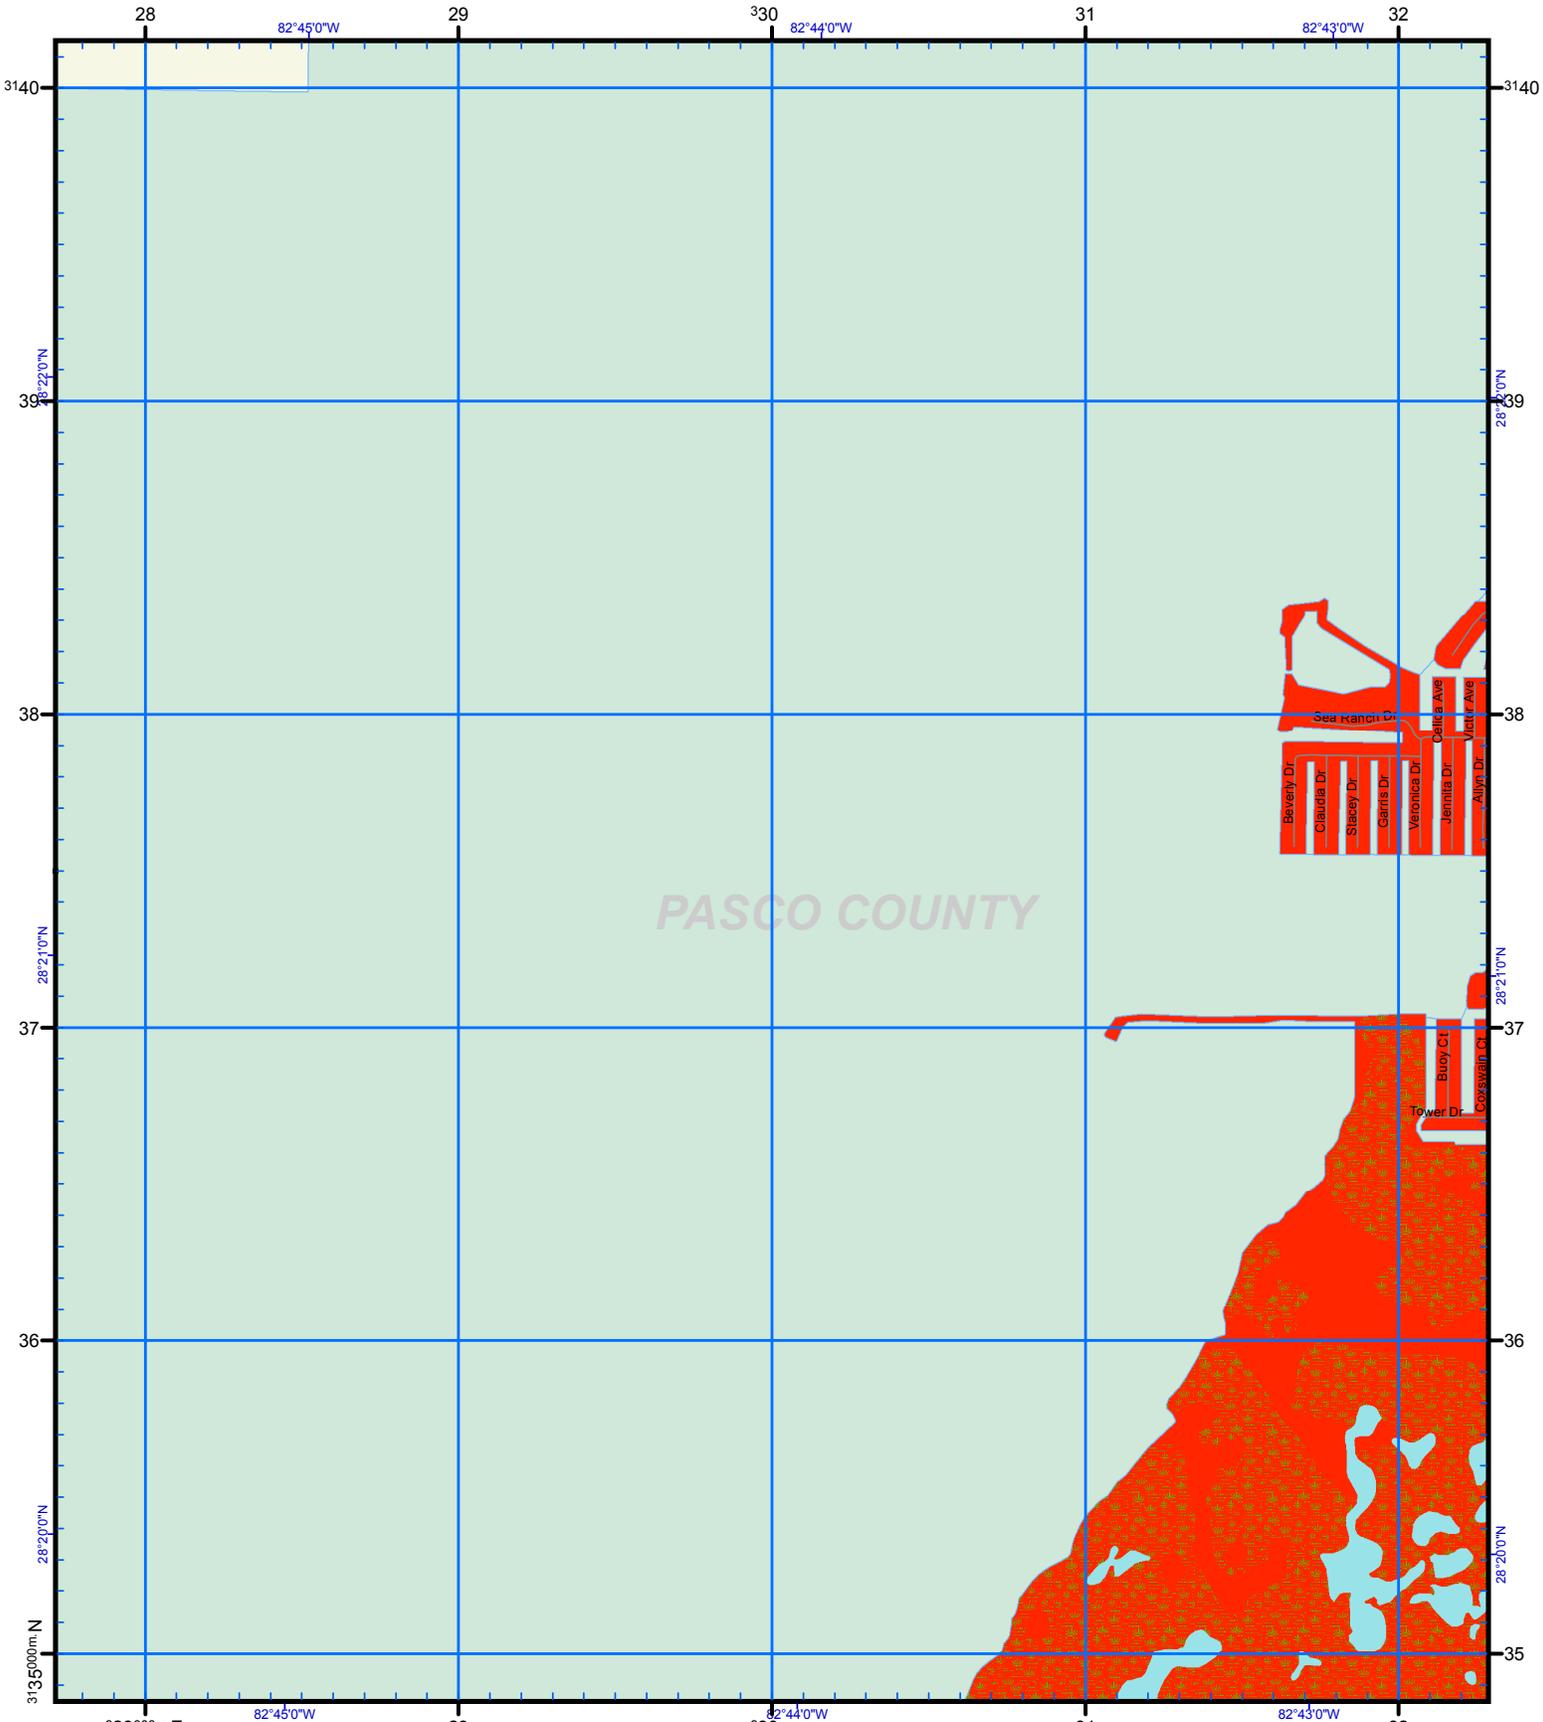


**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG




**Notes:**  
 1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
 2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
 3. The Points of Reference are locations determined to be relevant to emergency management officials.


ATLAS LEGEND		CAT	
	HOSPITAL		1
	Points of Reference		2
	Evacuation Route		3
	City Limits		4
	NHD Lakes		5
	NHD Major Water		

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
  
 USNG Page 17R LM 28 35  
 Map Plate 75

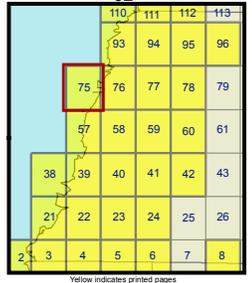

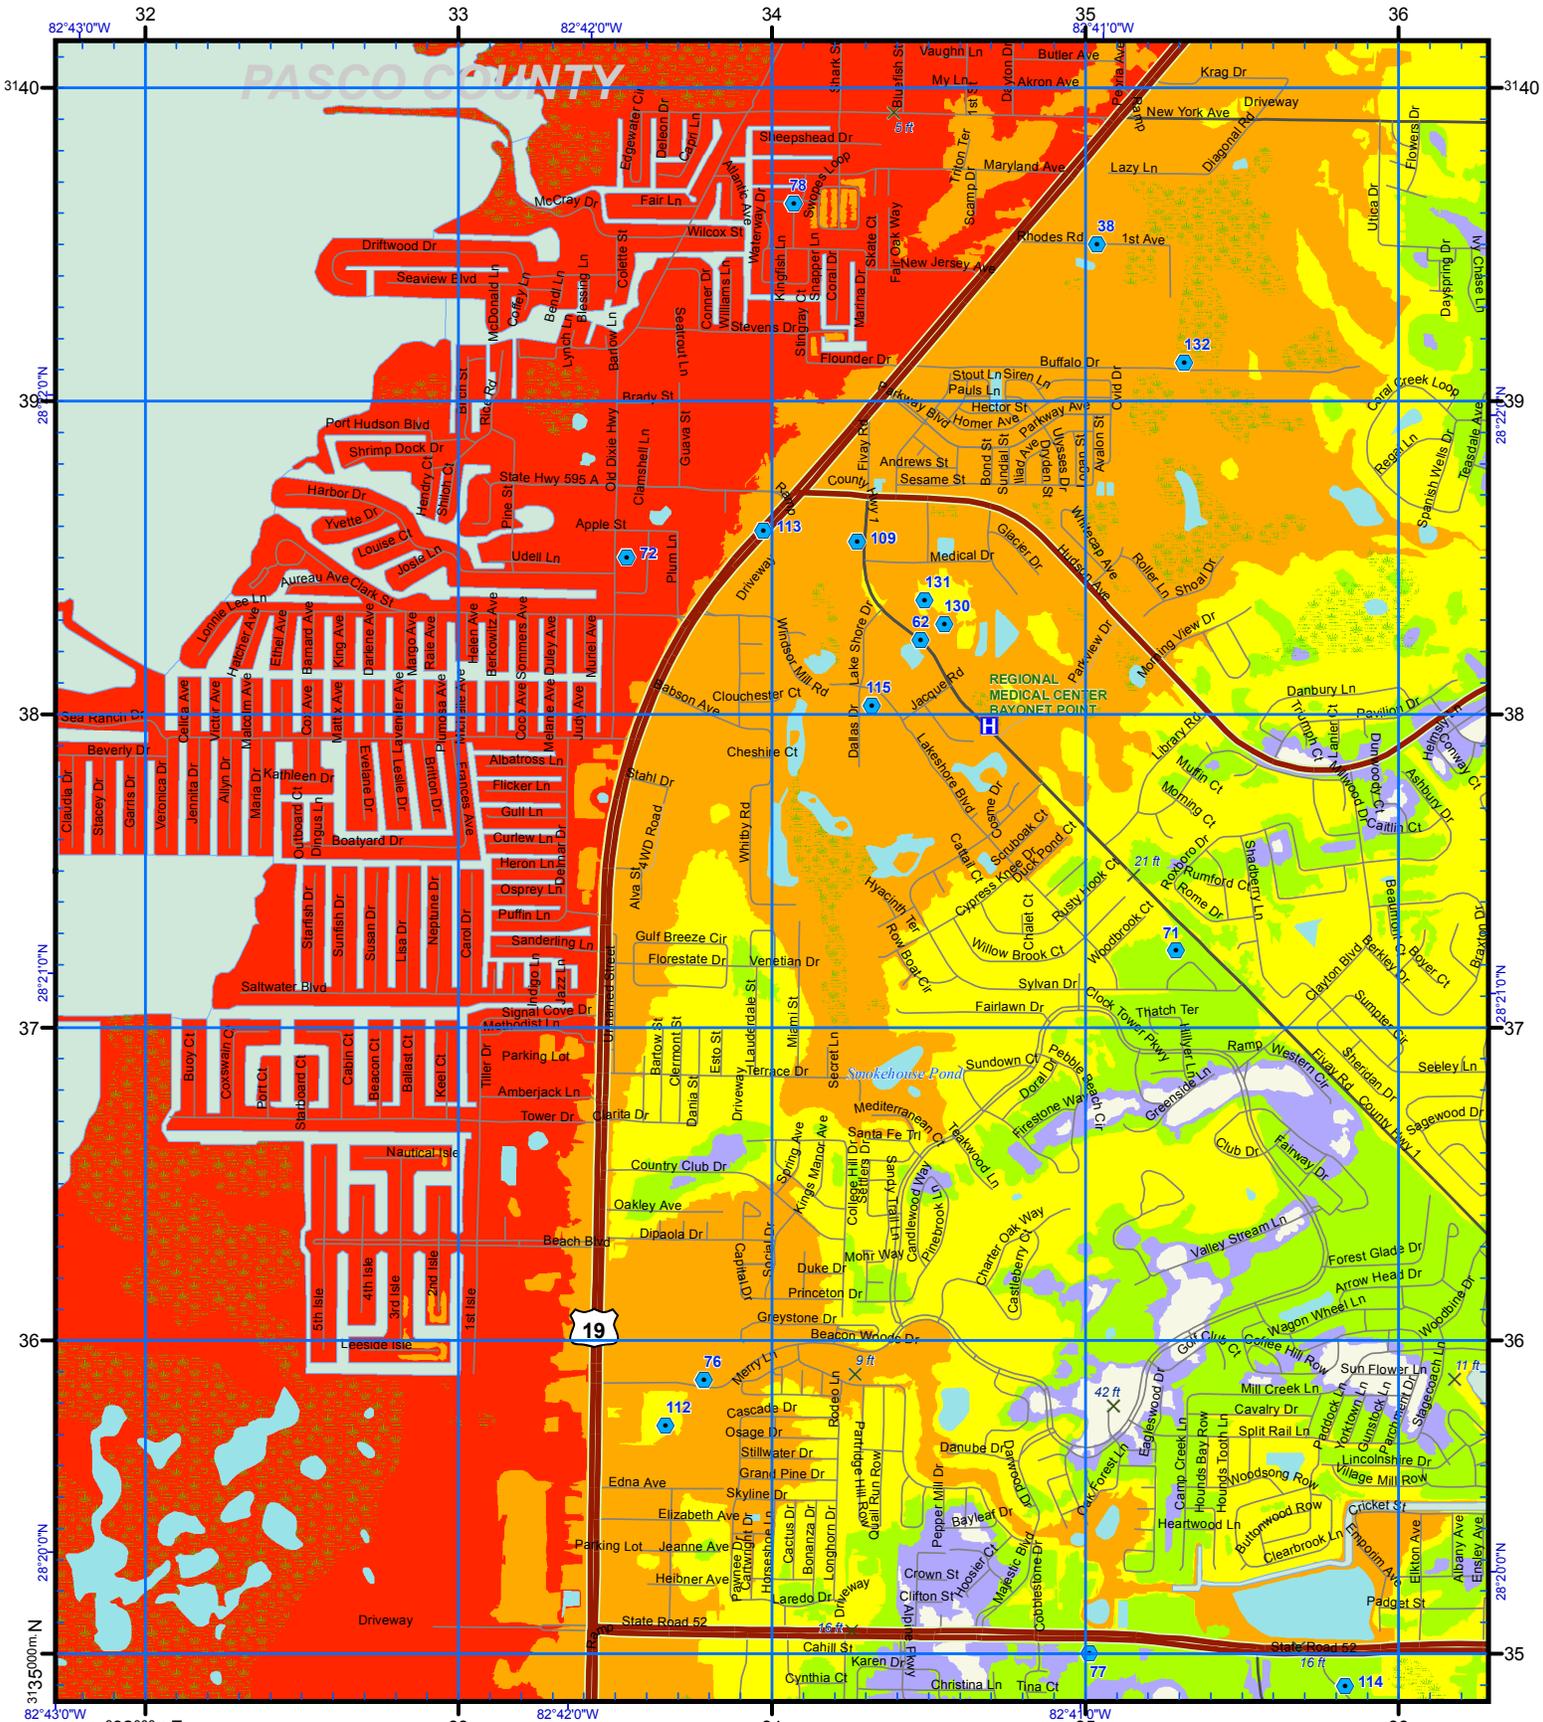

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





- Notes:**
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximum surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**

	<b>HOSPITAL</b>		<b>CAT 1</b>
	<b>Points of Reference</b>		<b>CAT 2</b>
	<b>Evacuation Route</b>		<b>CAT 3</b>
	<b>City Limits</b>		<b>CAT 4</b>
	<b>NHD Lakes</b>		<b>CAT 5</b>
	<b>NHD Major Water</b>		

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
  
 USNG Page 17R LM 32 35  
 Map Plate 76

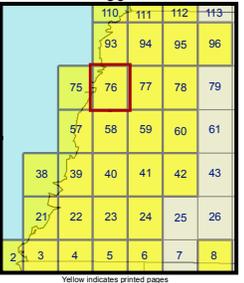

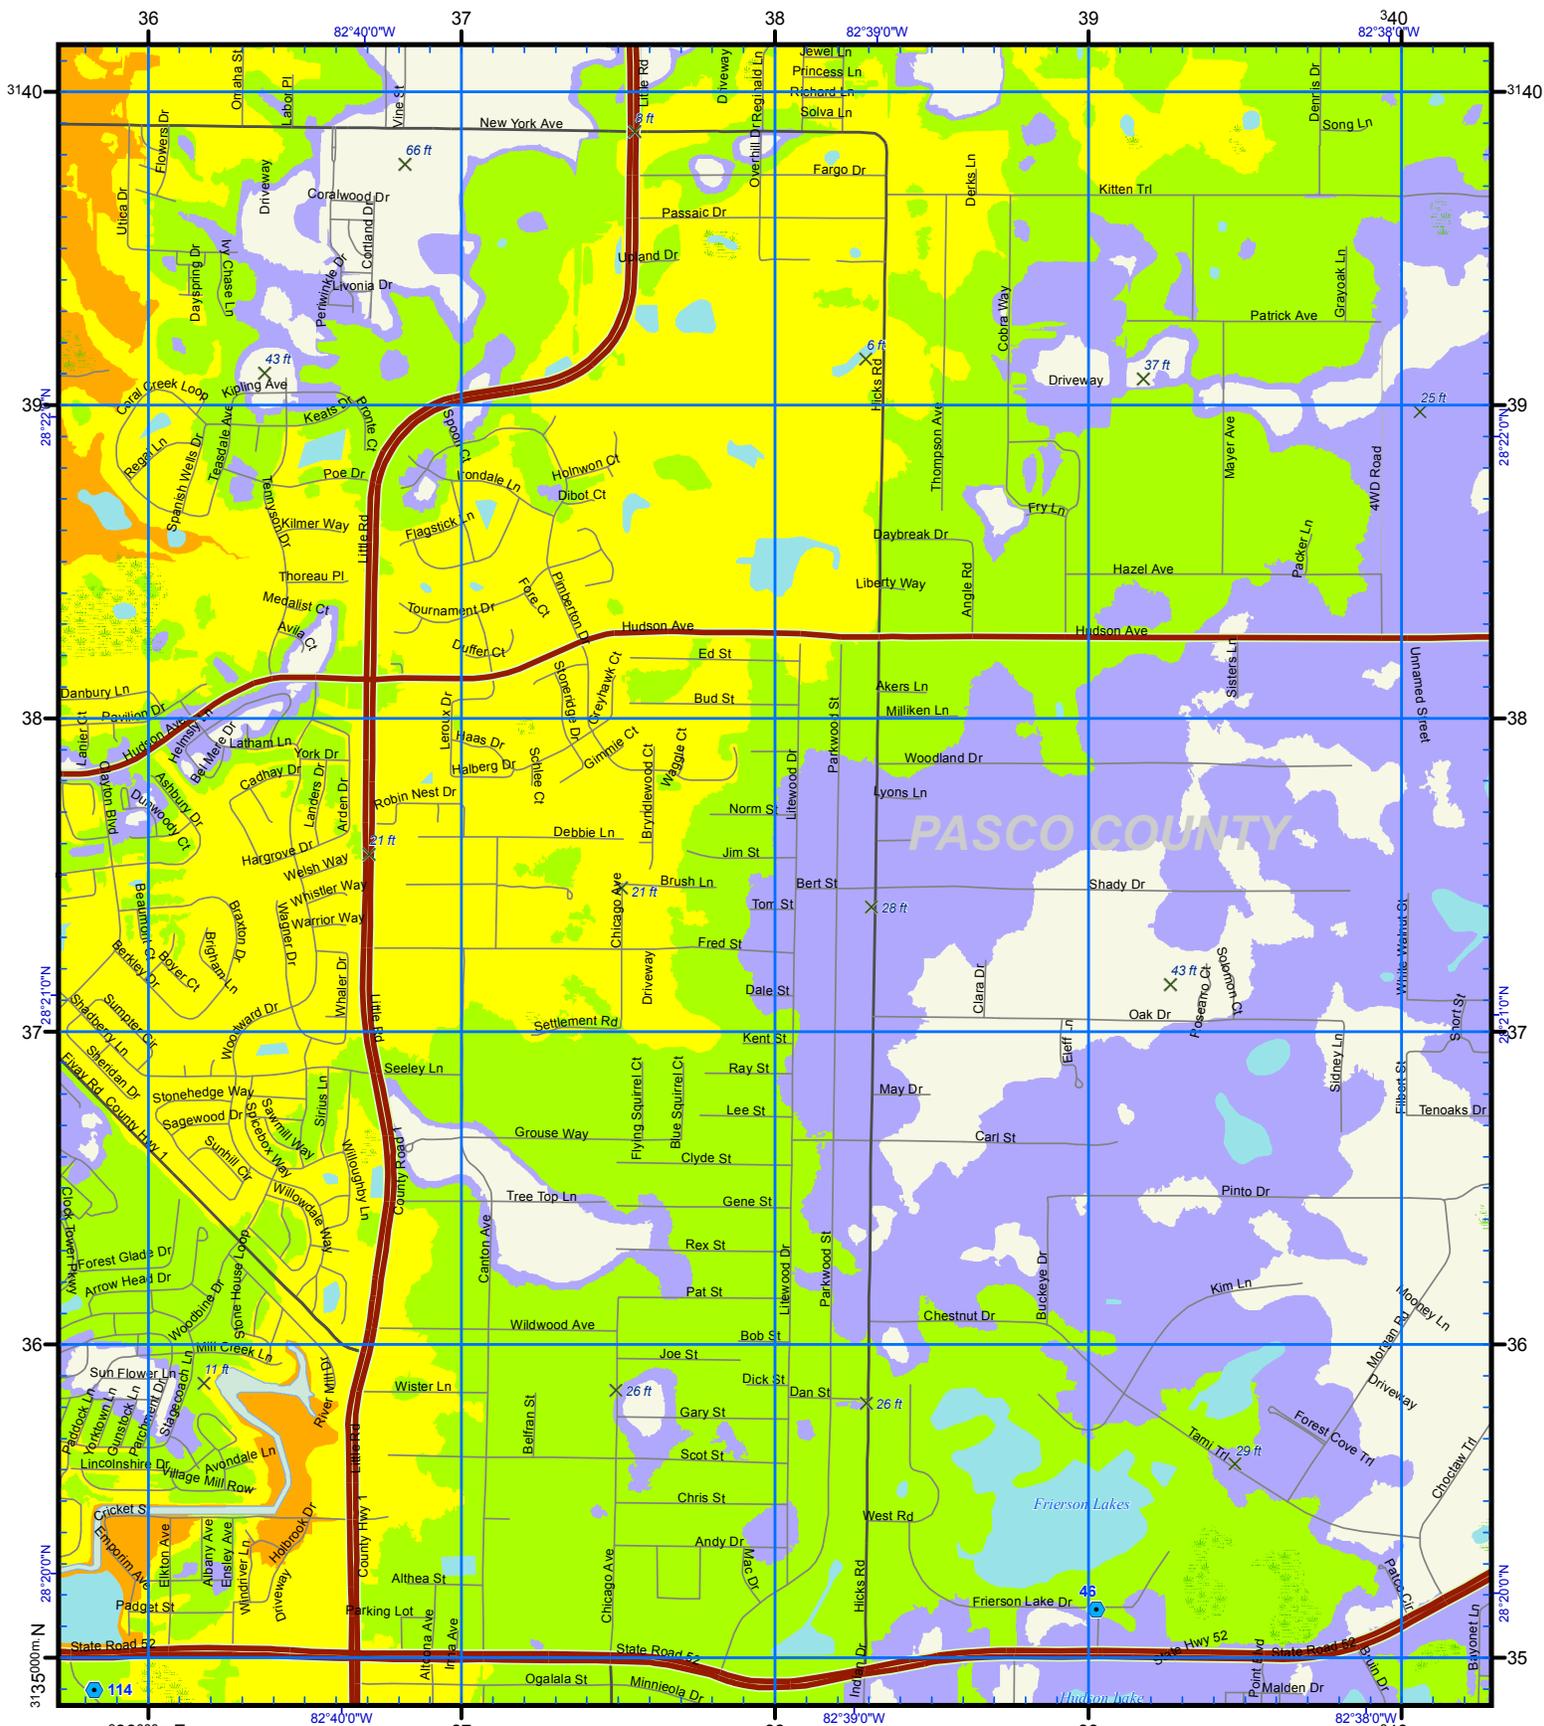

PASCO COUNTY

**US National Grid**  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG





- Notes:
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 36 35  
Map Plate 77

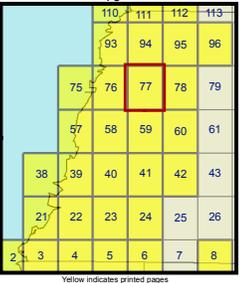

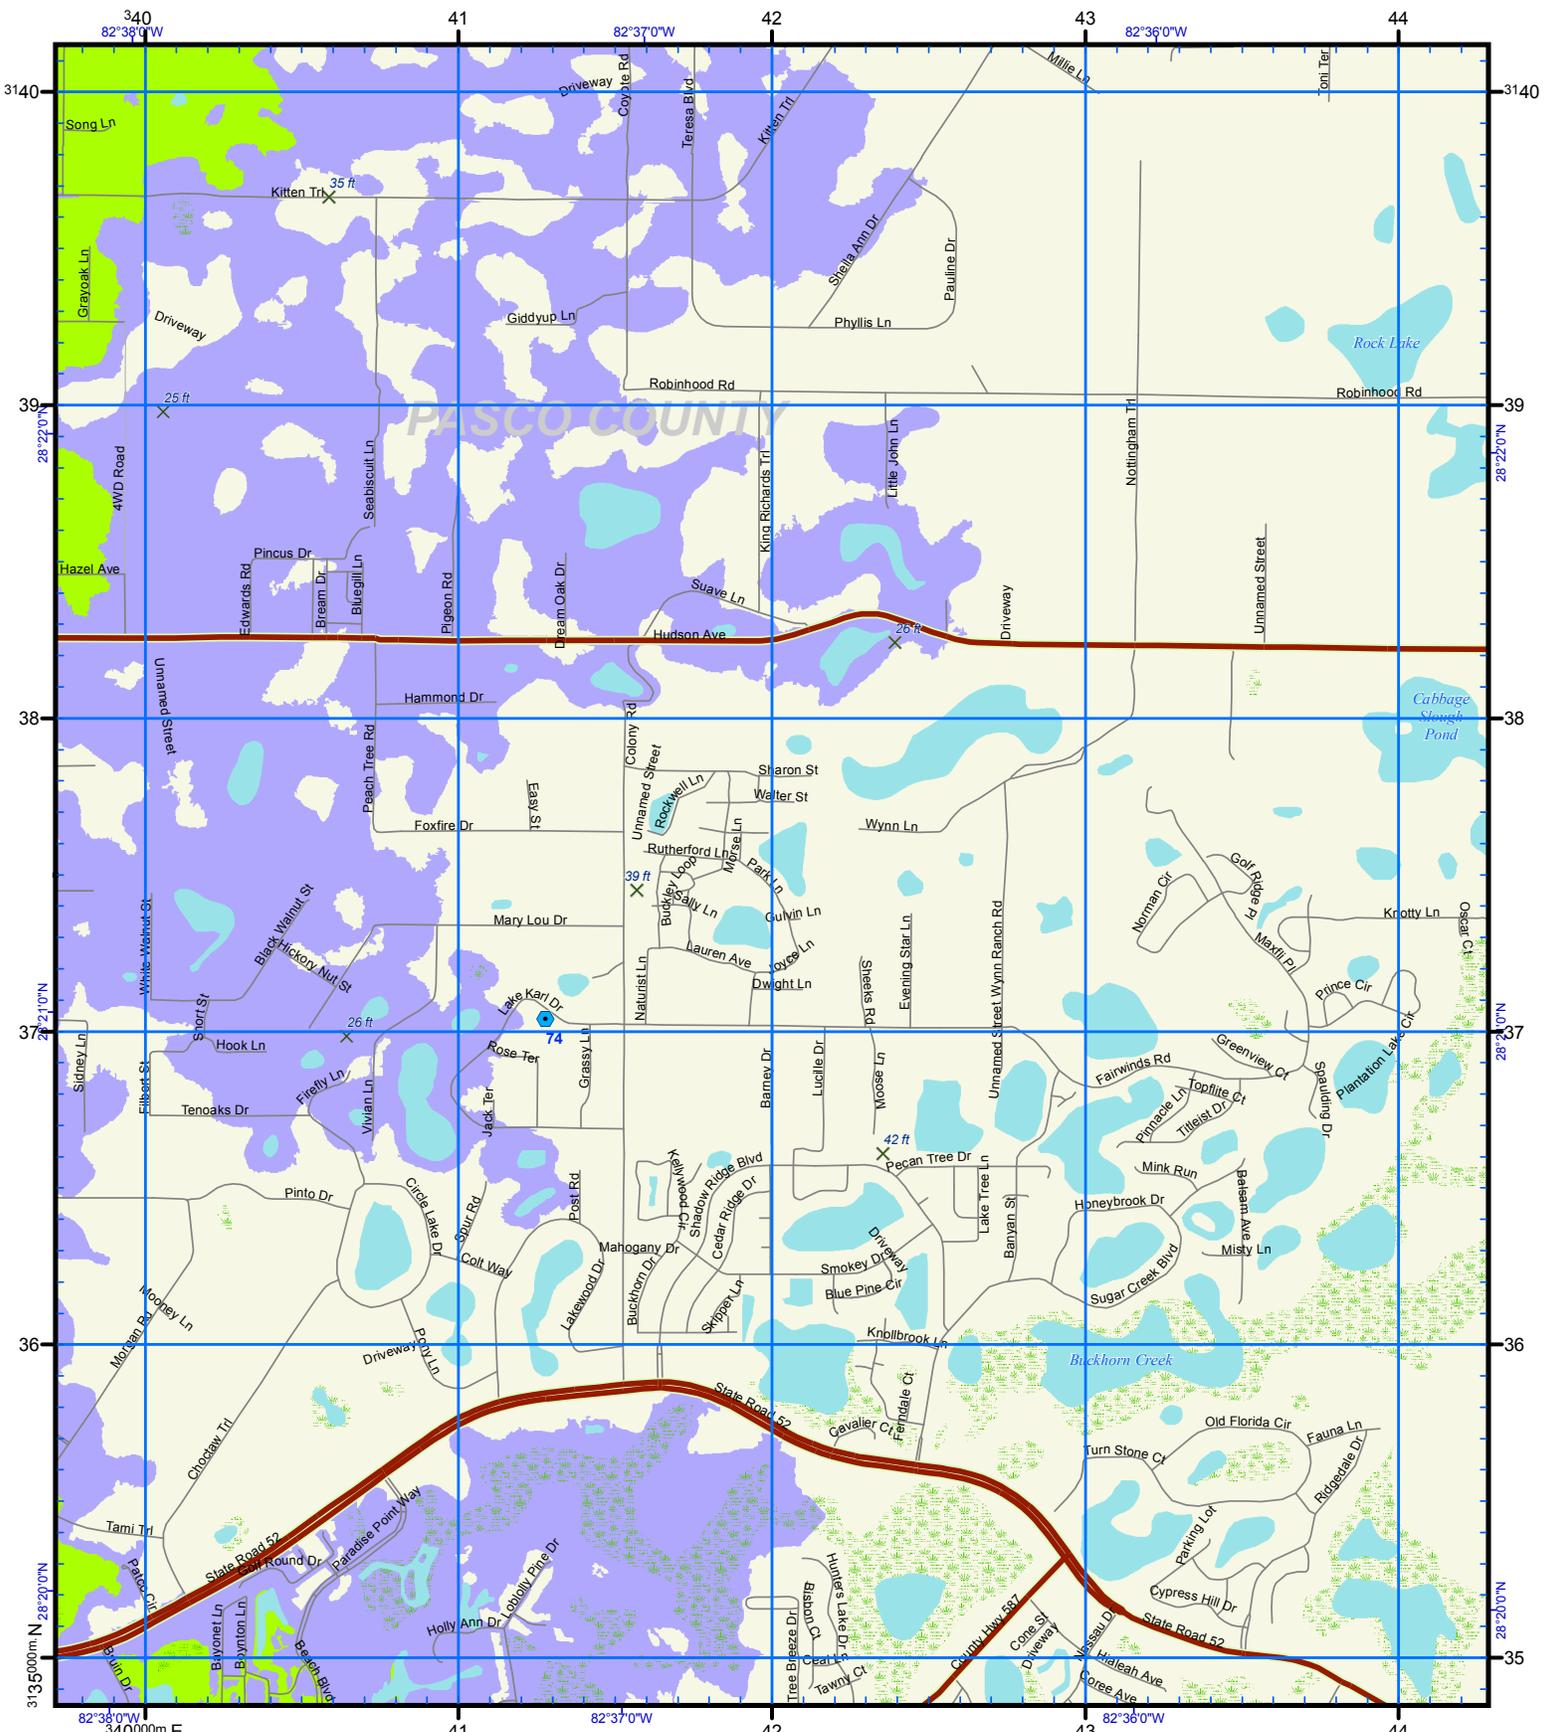

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





- Notes:
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**

HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
  
 USNG Page 17R LM 40 35  
 Map Plate 78

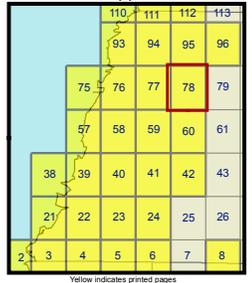

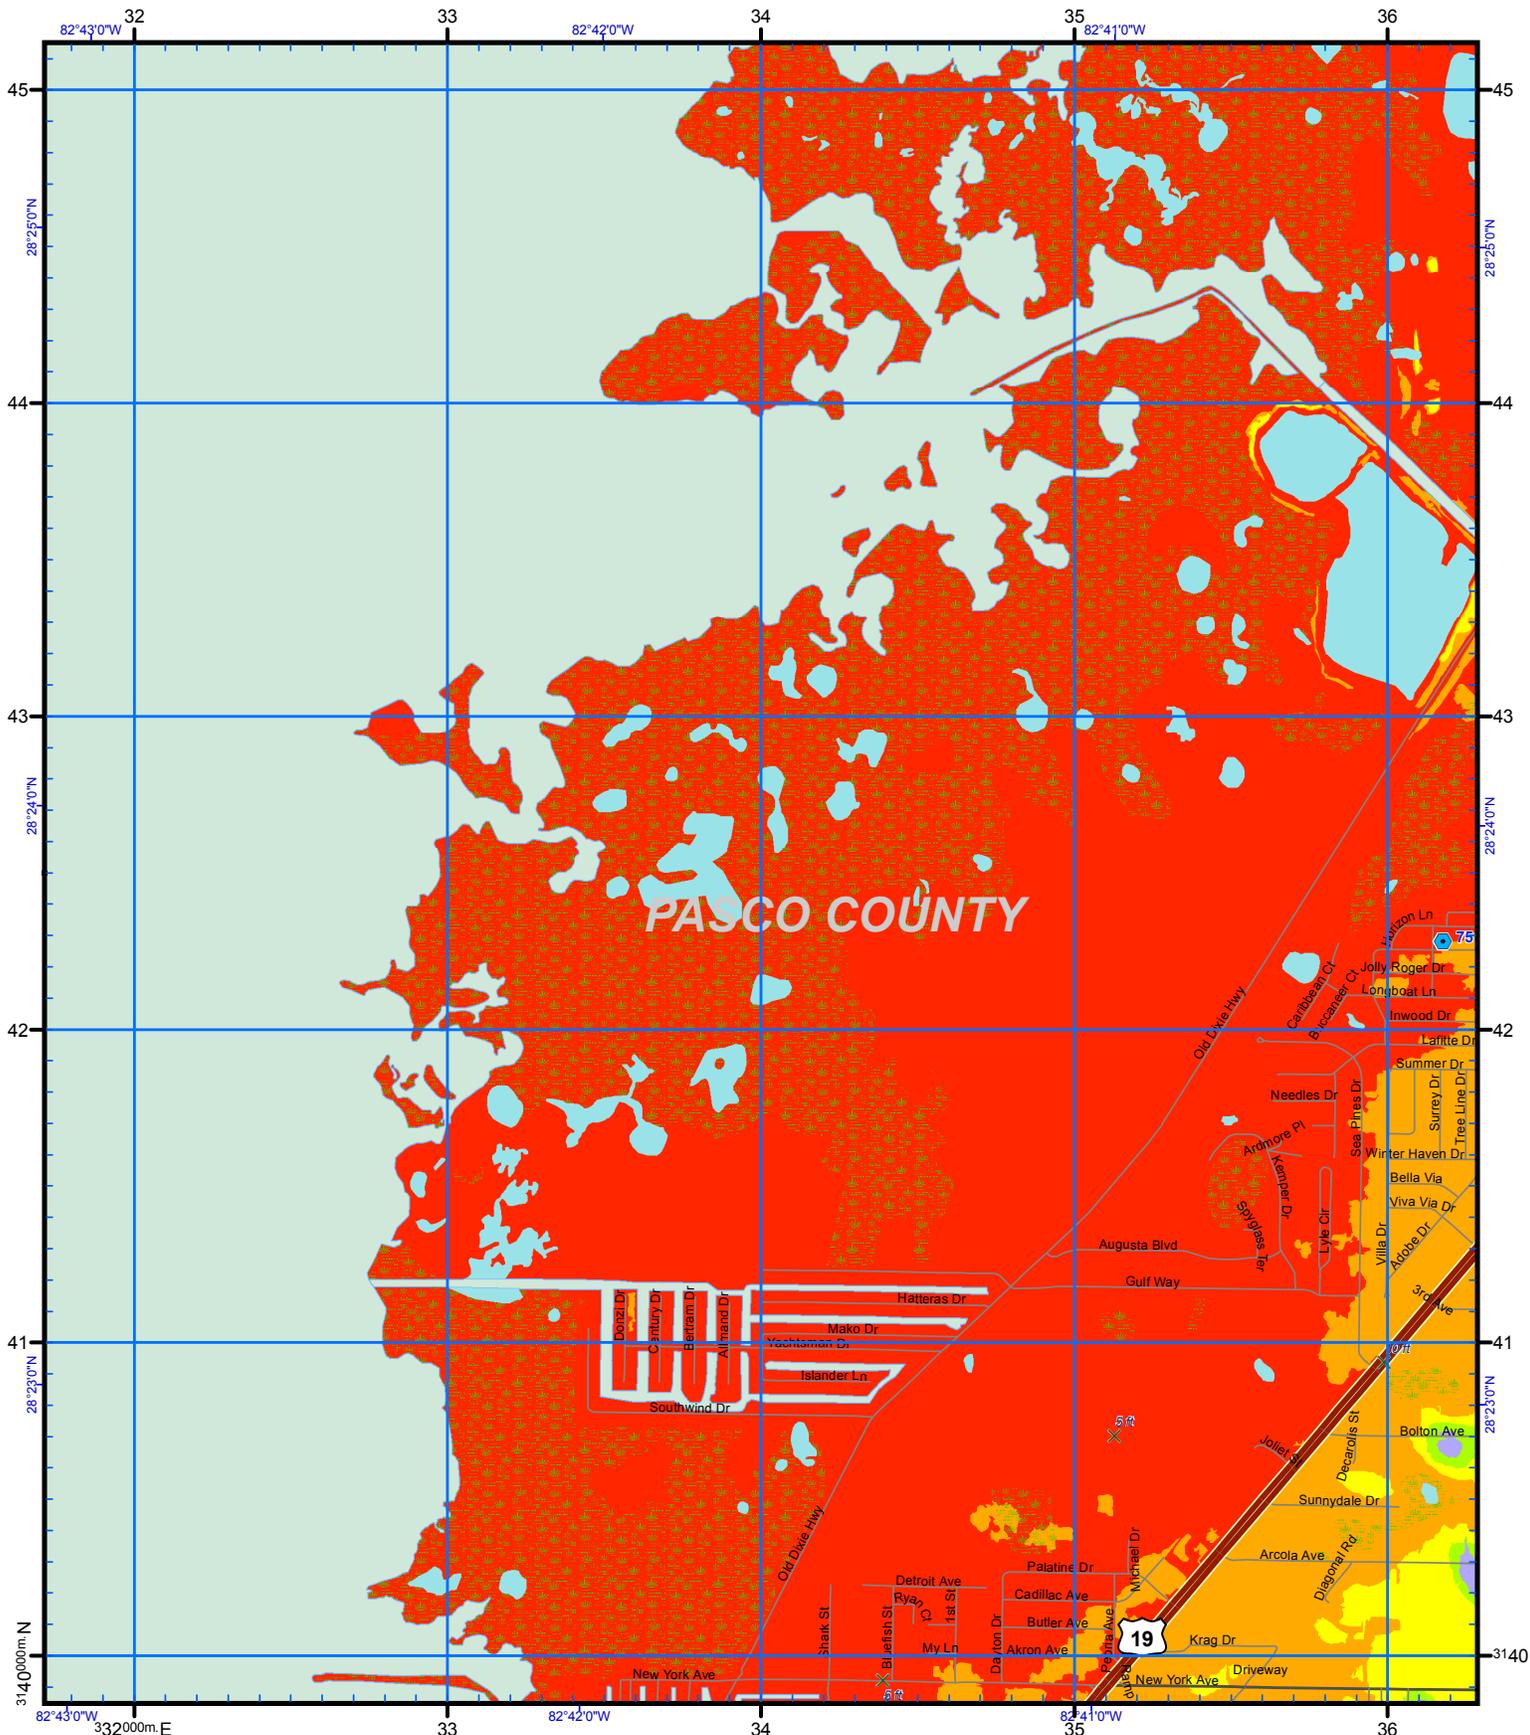

US National Grid  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG




*This map is for reference & planning purposes only. Hurricane evacuation decision-making and growth management implementation are local responsibilities. Please consult with local authorities.*


- Notes:
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**

HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 32 40  
Map Plate 93

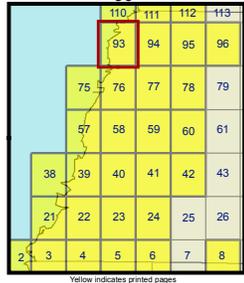

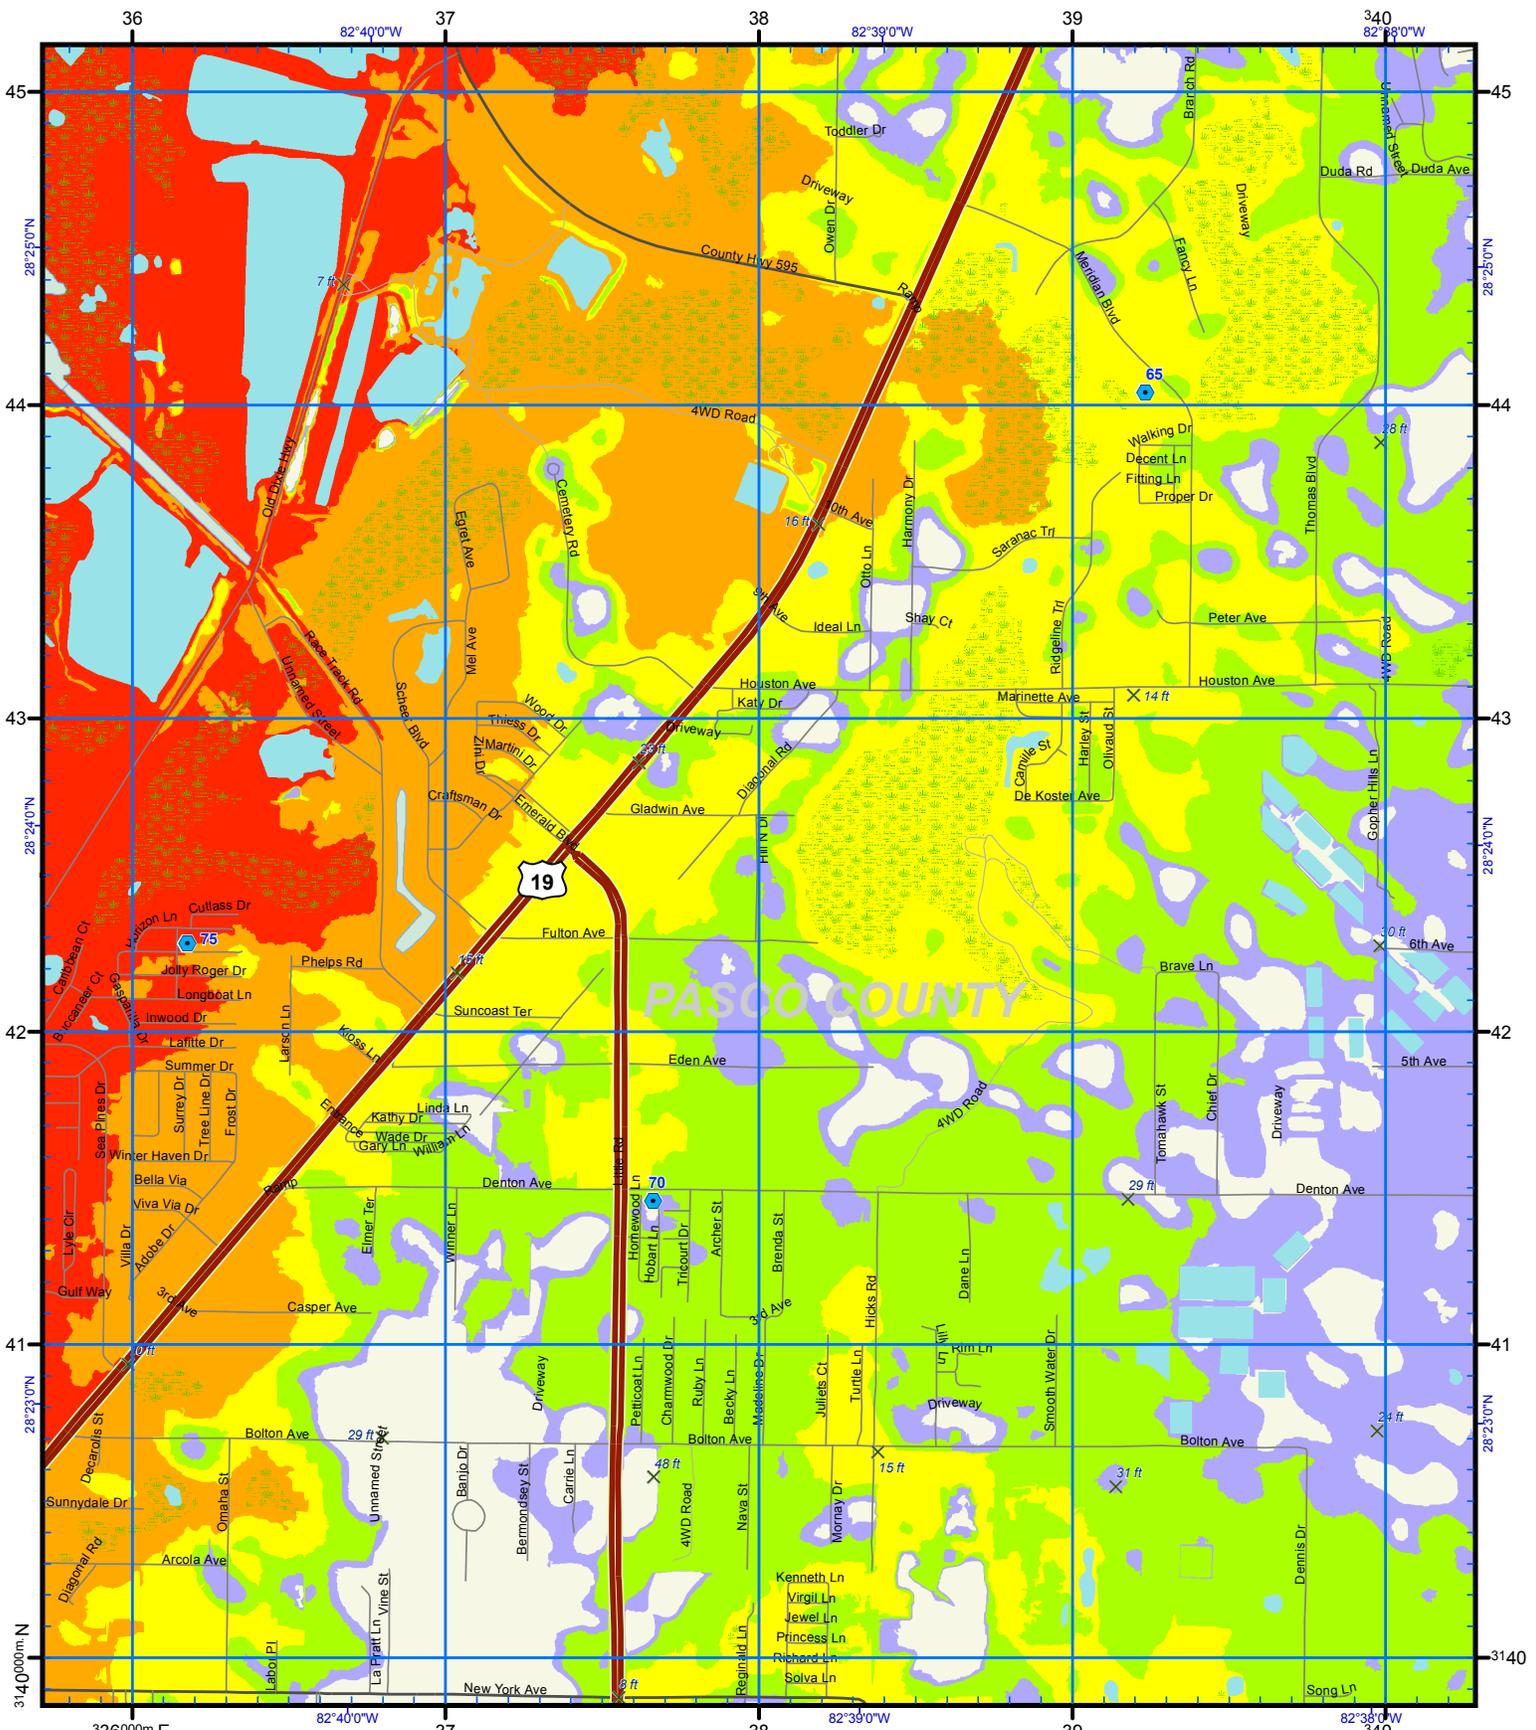

US National Grid  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG

This map is for reference & planning purposes only. Hurricane evacuation decision-making and growth management implementation are local responsibilities. Please consult with local authorities.





- Notes:
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**

HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	

**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 36 40  
Map Plate 94

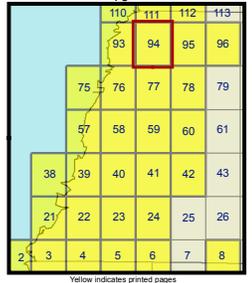

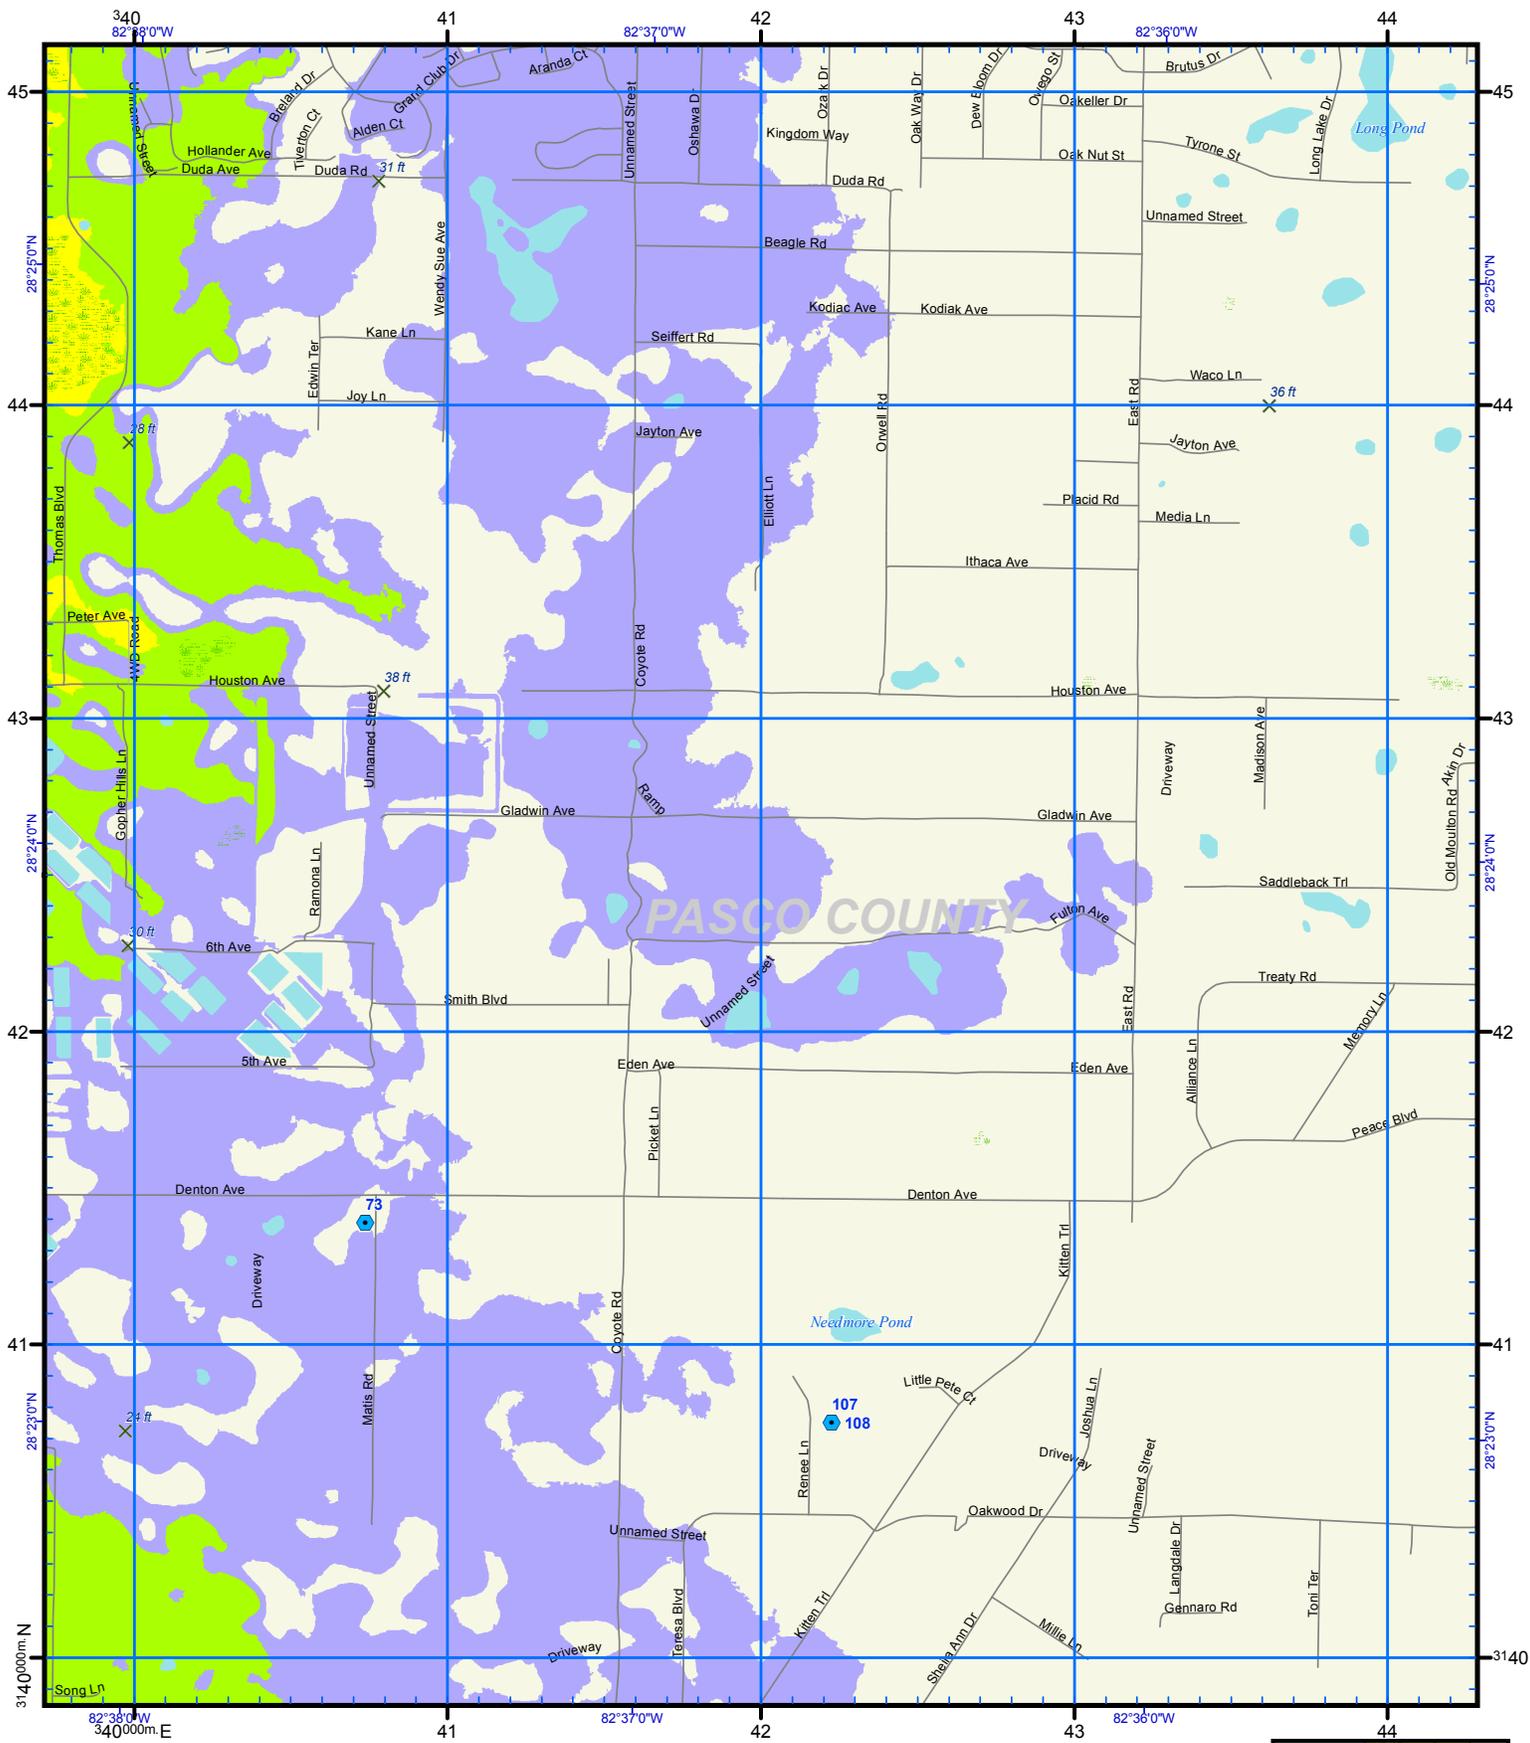

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG




**Notes:**  
 1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
 2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
 3. The Points of Reference are locations determined to be relevant to emergency management officials.


**ATLAS LEGEND**

HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Major Water	CAT 5

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000


USNG Page 17R LM 40 40  
 Map Plate 95

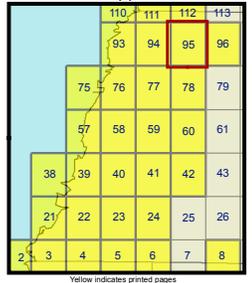

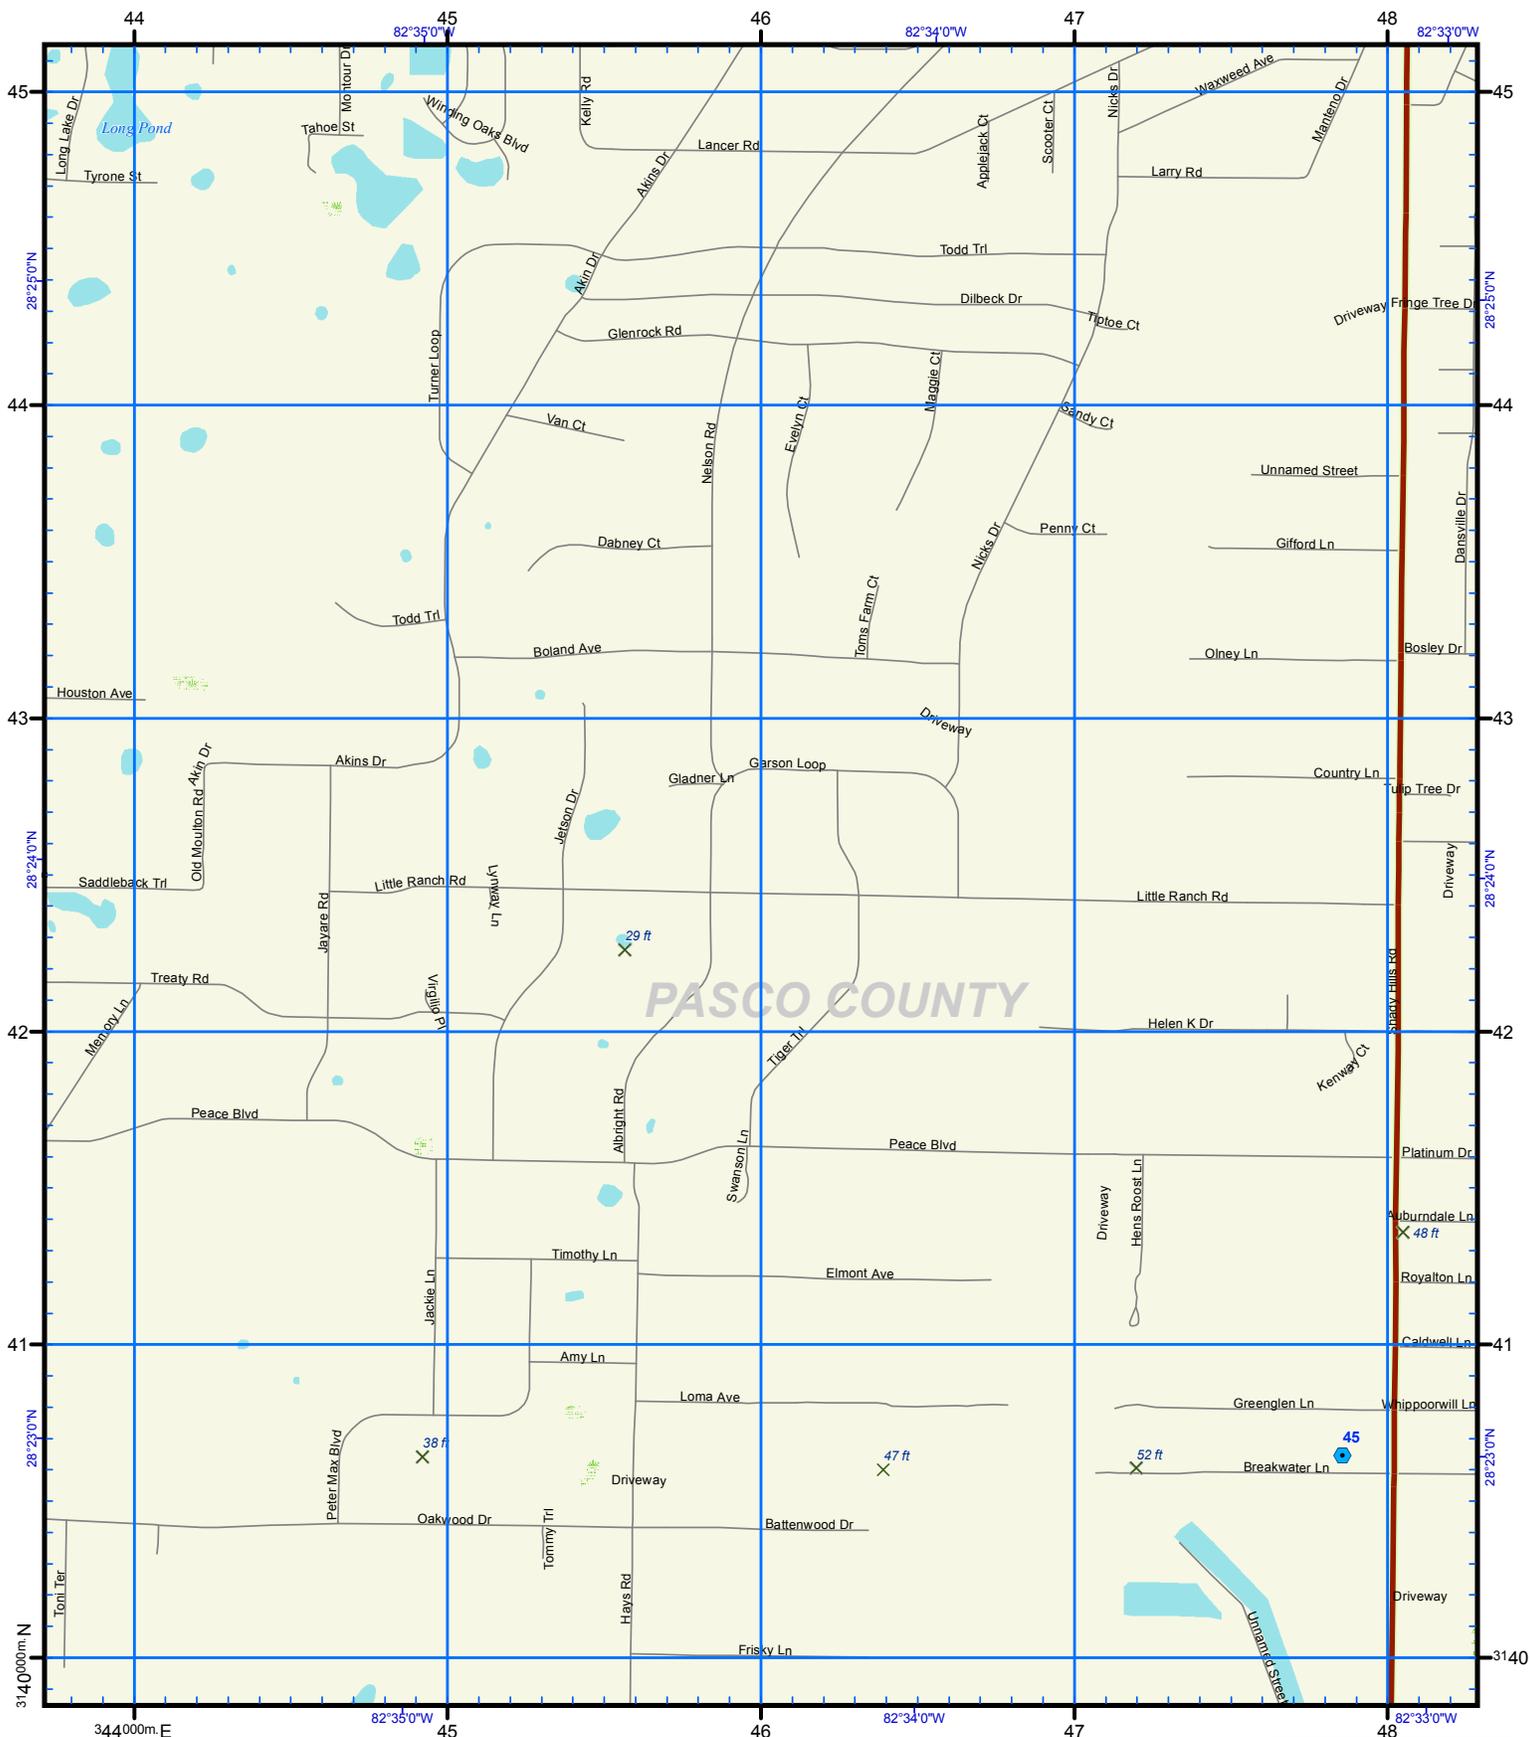

PASCO COUNTY

US National Grid  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG




Notes:  
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
3. The Points of Reference are locations determined to be relevant to emergency management officials.


**ATLAS LEGEND**

HOSPITAL	CAT 1
Points of Reference	CAT 2
Evacuation Route	CAT 3
City Limits	CAT 4
NHD Lakes	CAT 5
NHD Major Water	


**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 44 40  
Map Plate 96

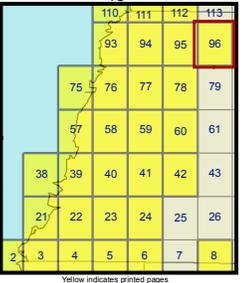

This map is for reference & planning purposes only. Hurricane evacuation decision-making and growth management implementation are local responsibilities. Please consult with local authorities.

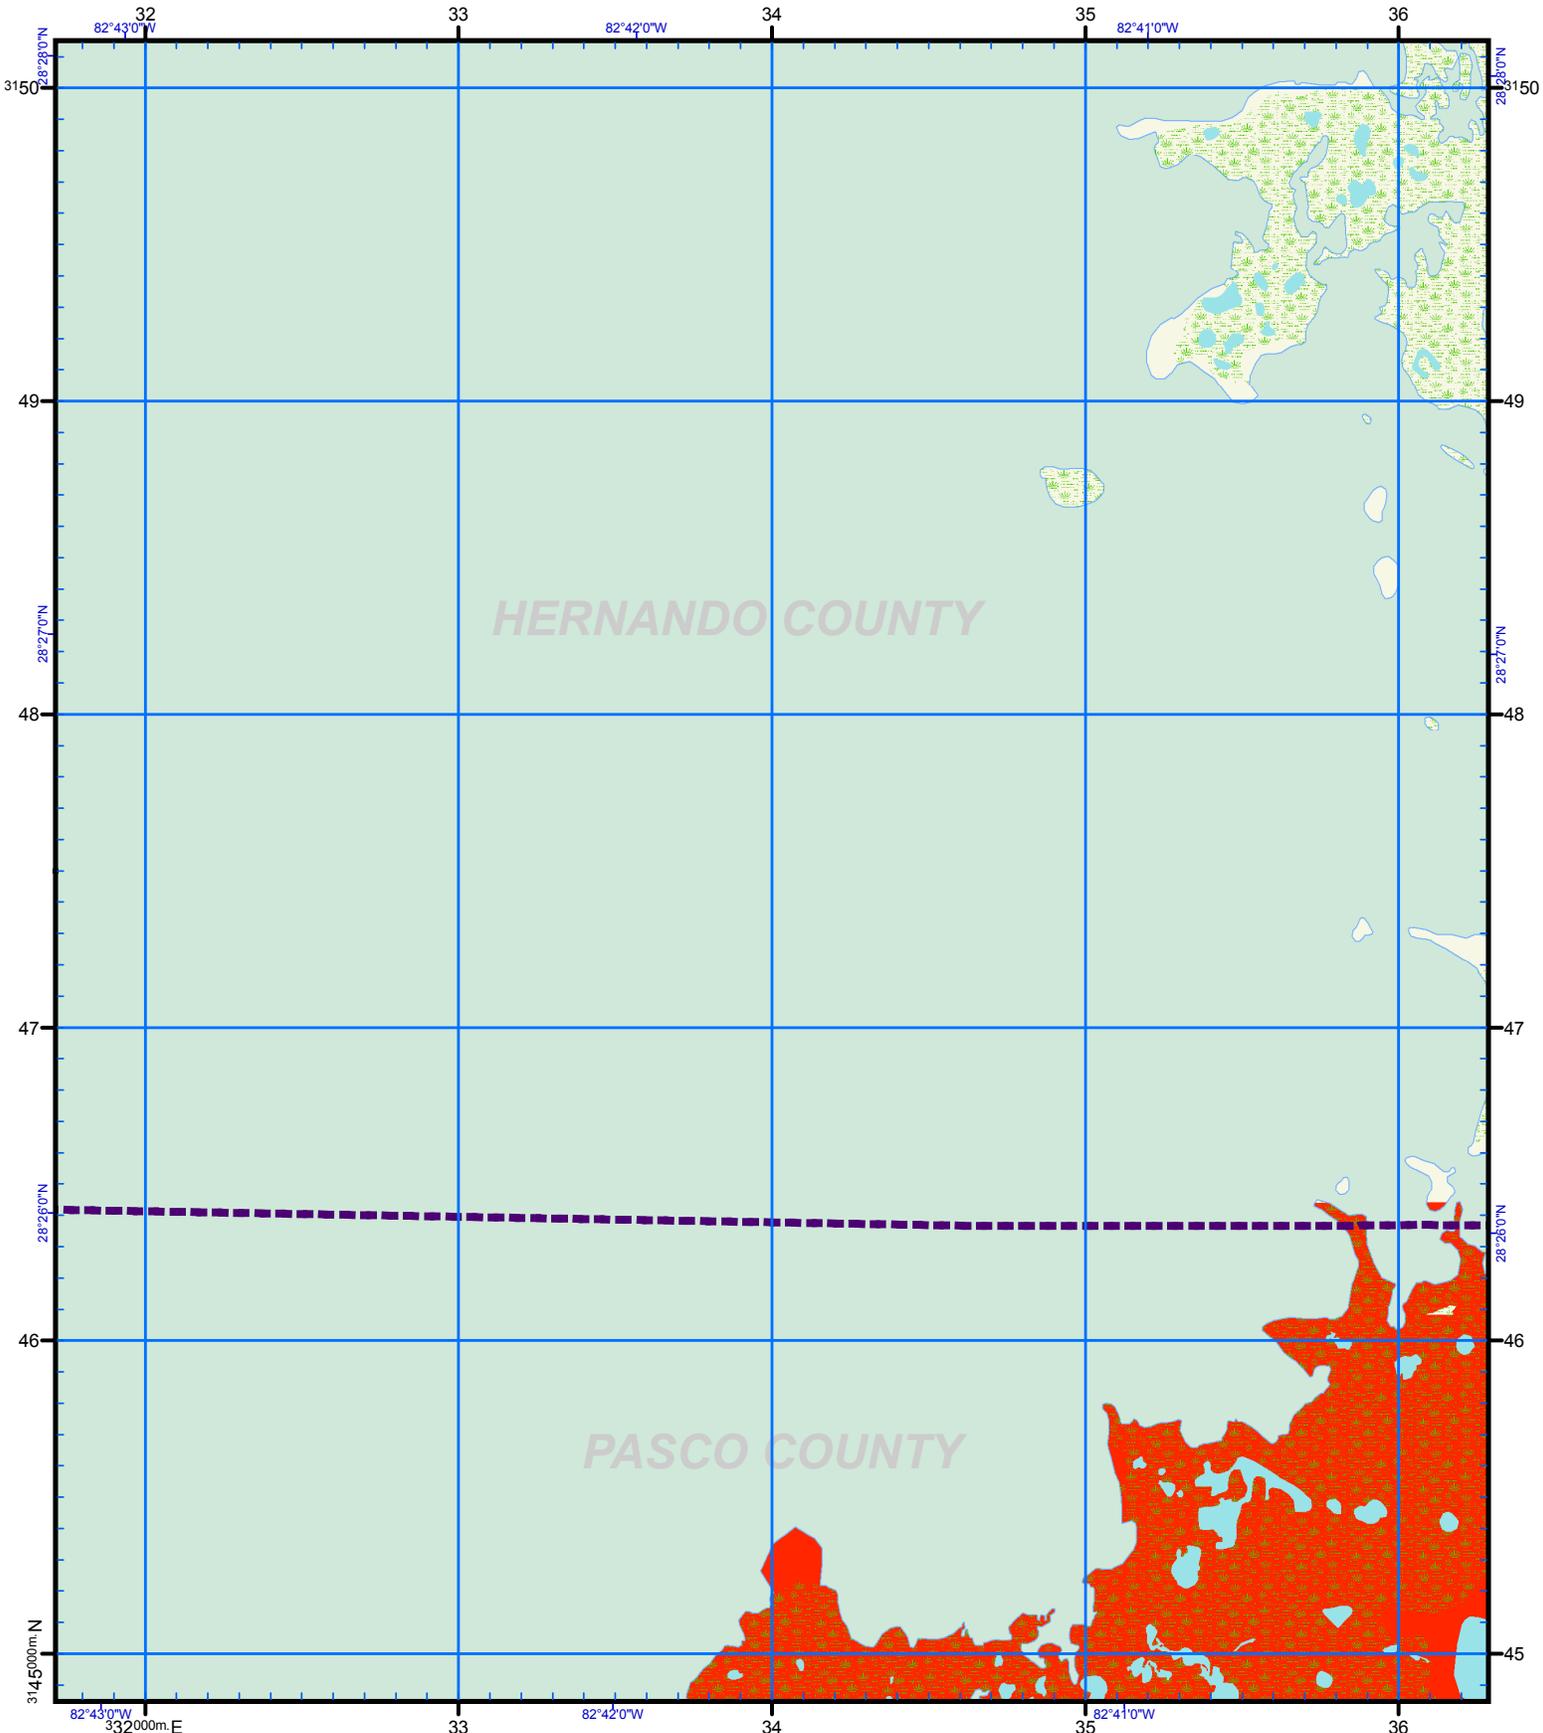

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





**Notes:**  
 1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
 2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
 3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**

HOSPITAL	Points of Reference	Evacuation Route	City Limits	NHD Lakes	NHD Major Water
CAT 1	CAT 2	CAT 3	CAT 4	CAT 5	

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
  
 USNG Page 17R LM 32 45  
 Map Plate 110

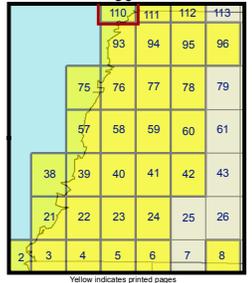

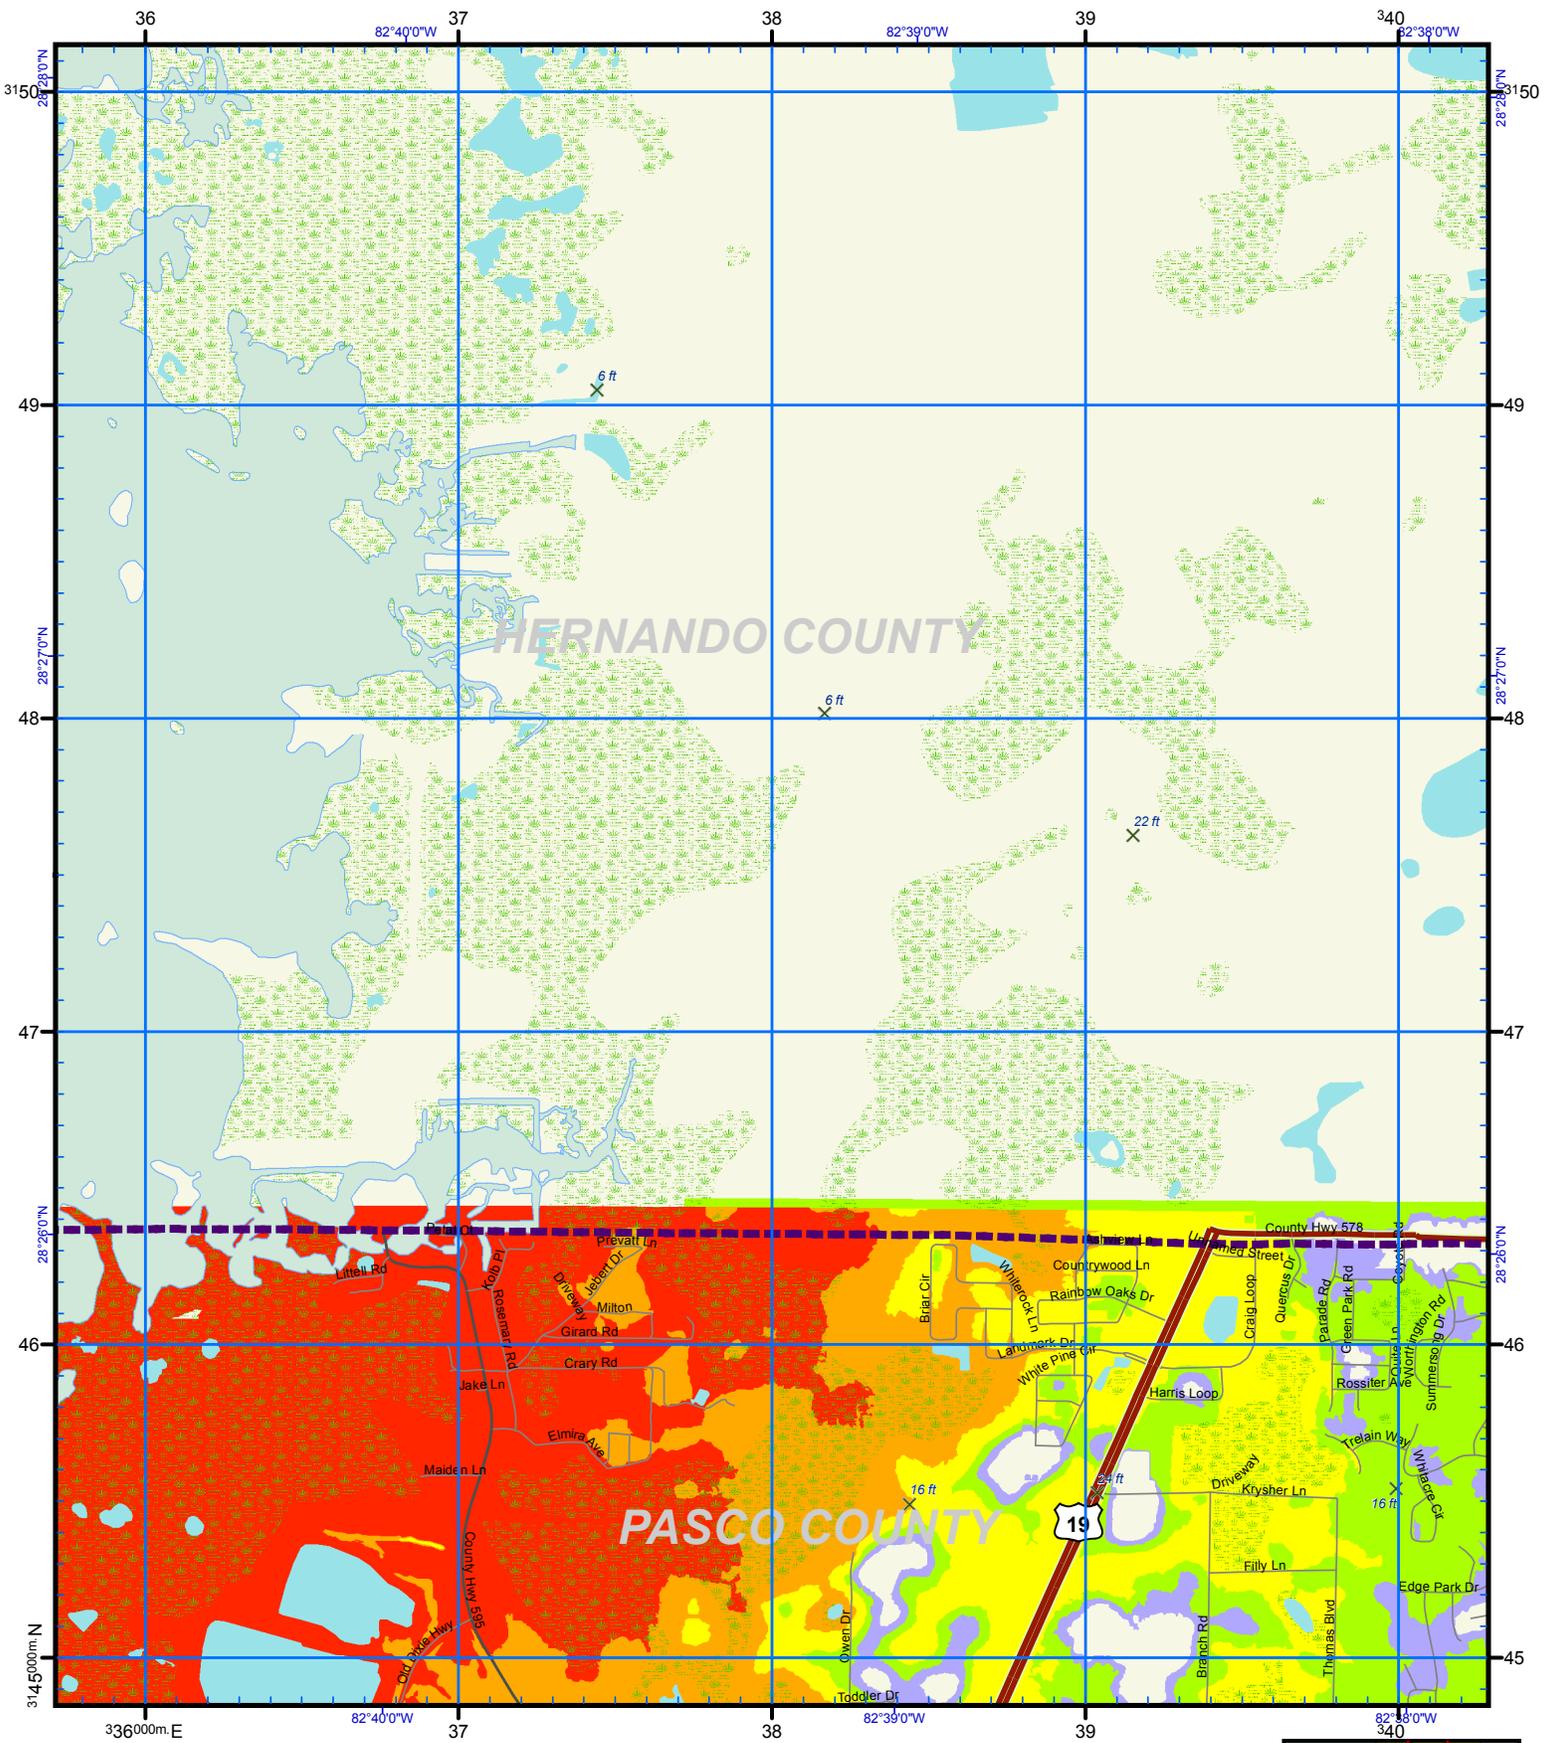

**US National Grid**  
 100,000-m Square ID  
**LM**  
 Grid Zone Designation  
**17R**  
 Datum = NAD 1983, 1,000-m USNG





- Notes:**
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.
  2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.
  3. The Points of Reference are locations determined to be relevant to emergency management officials.

**ATLAS LEGEND**


HOSPITAL	<b>CAT</b>	1
Points of Reference	2	3
Evacuation Route	4	5
City Limits	NHD Lakes	
NHD Major Water		

**Storm Tide Zones**  
 Pasco County, 2010  
 Scale - 1:24,000  
 0 2,000 Feet  
 USNG Page 17R LM 36 45  
 Map Plate 111

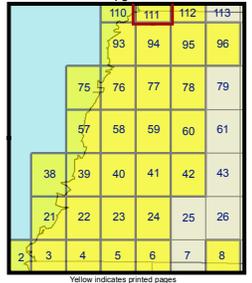

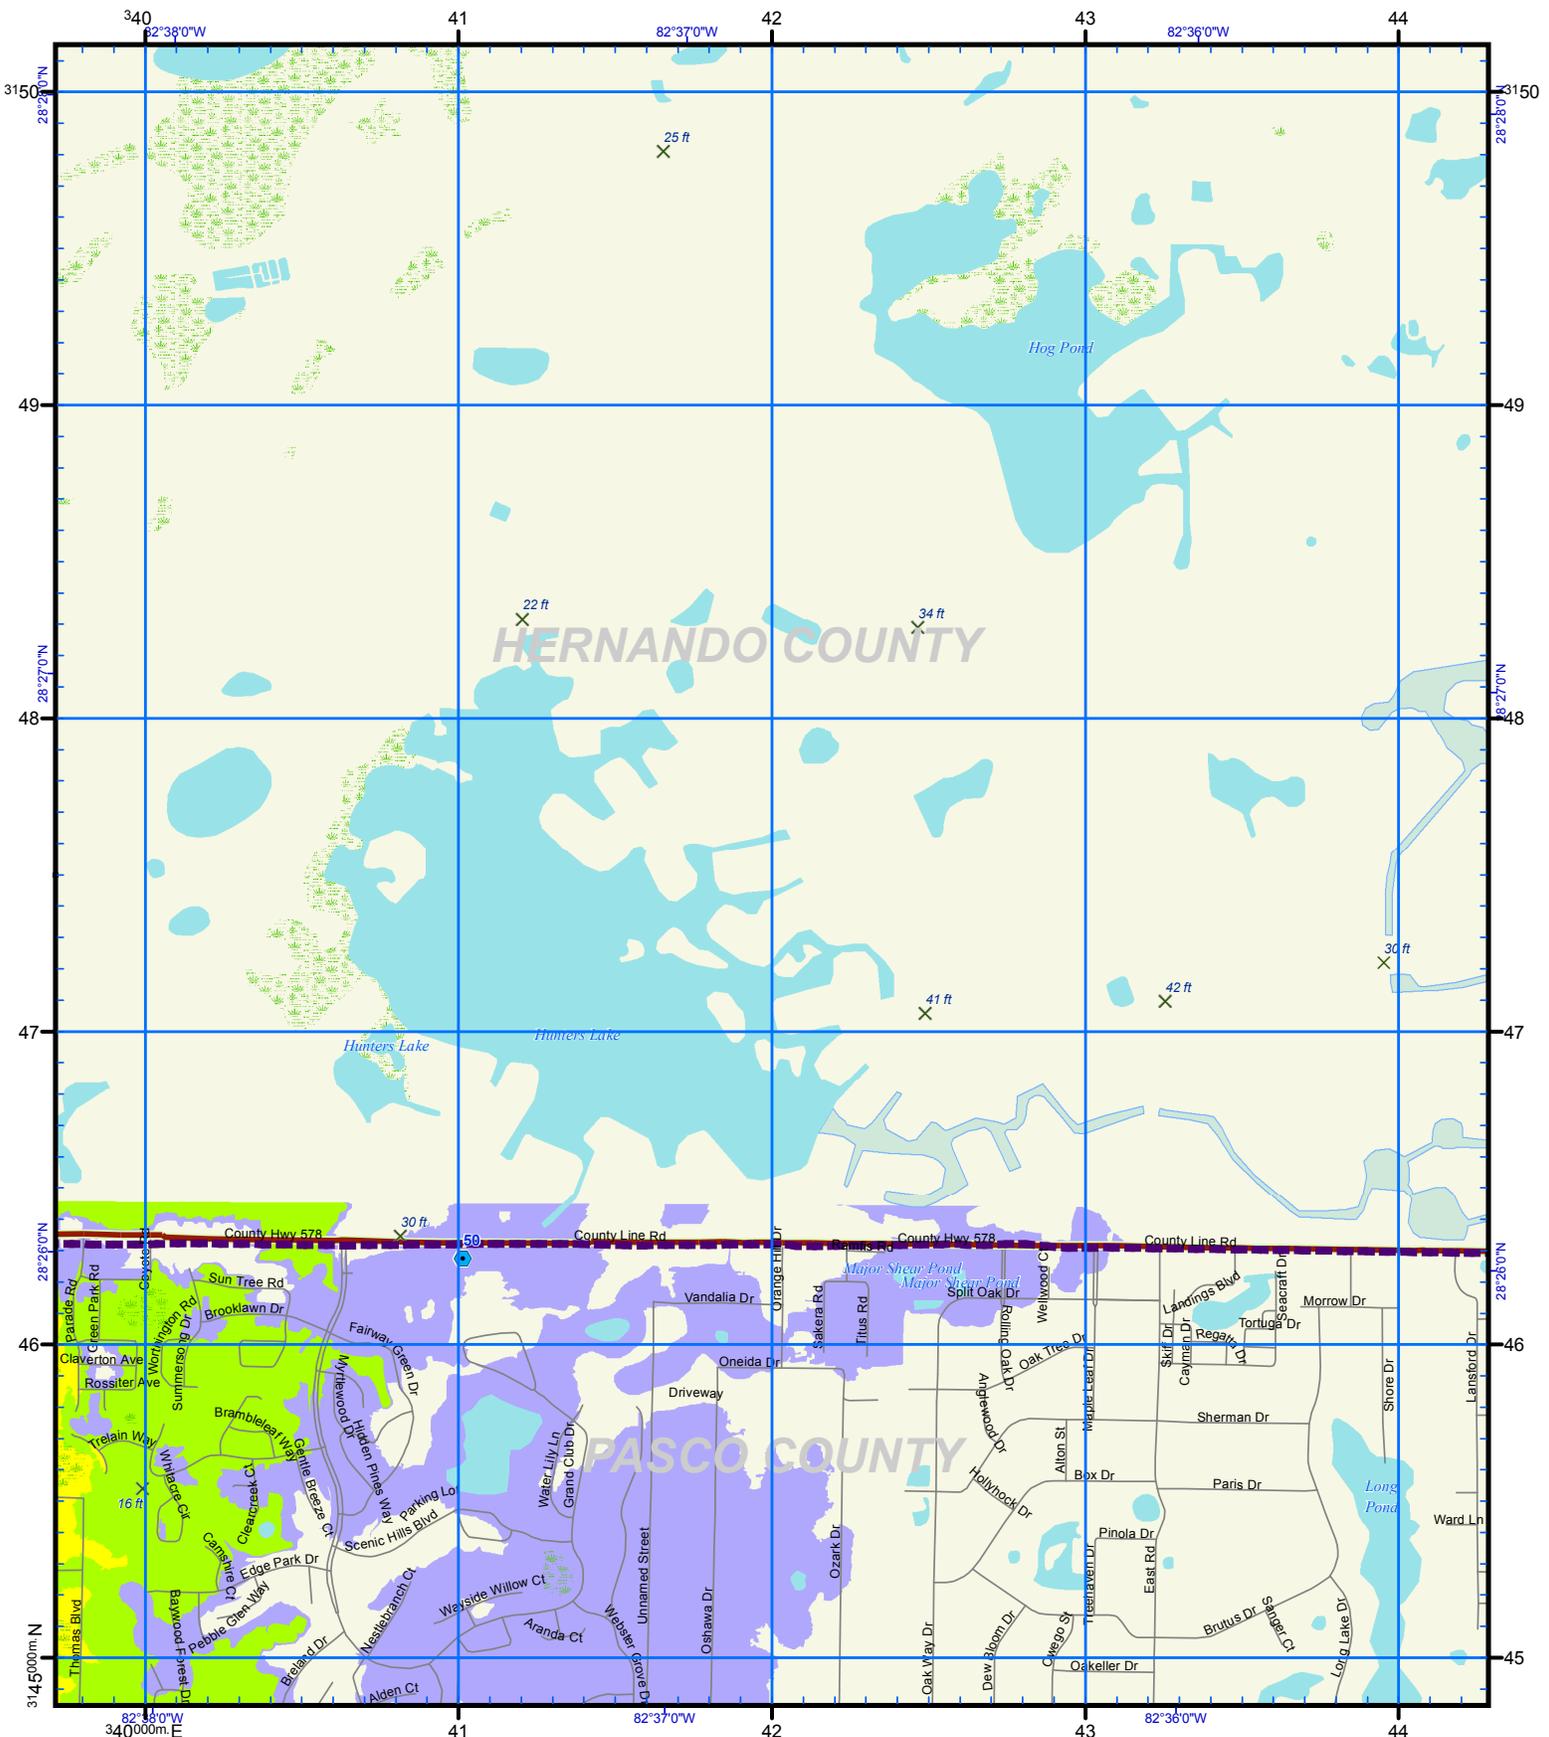

**US National Grid**  
100,000-m Square ID  
**LM**  
Grid Zone Designation  
**17R**  
Datum = NAD 1983, 1,000-m USNG




*This map is for reference & planning purposes only. Hurricane evacuation decision-making and growth management implementation are local responsibilities. Please consult with local authorities.*

**Notes:**  
1. Surge limits are based on still water storm tide height elevation above NAVD88 at high tide with no wave setup.  
2. Total Storm Tide limits were derived from Maximum of Maximums surge heights over LIDAR based digital elevation.  
3. The Points of Reference are locations determined to be relevant to emergency management officials.


**ATLAS LEGEND**

HOSPITAL	<b>CAT</b>
Points of Reference	1
Evacuation Route	2
City Limits	3
NHD Lakes	4
NHD Major Water	5

**Storm Tide Zones**  
Pasco County, 2010  
Scale - 1:24,000  
0 2,000 Feet  
USNG Page 17R LM 40 45  
Map Plate 112

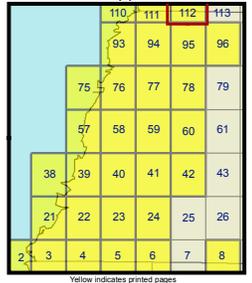



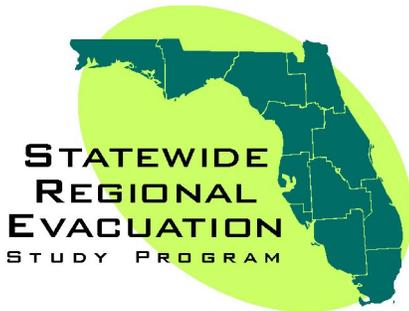

Funding was provided by the Florida Legislature with funding from the Federal Emergency Management Agency (FEMA) through the Florida Division of Emergency Management. Local match was provided by the Tampa Bay Regional Planning Council and Hillsborough, Manatee, Pasco and Pinellas Counties.

**Florida Division of Emergency Management**

**David Halstead, Director**

**2555 Shumard Oak Boulevard, Tallahassee, Florida 32399**

**Web site: [www.floridadisaster.org](http://www.floridadisaster.org)**



Prepared and published by  
Tampa Bay Regional Council, 4000 Gateway Centre Blvd., Pinellas Park, Florida 33782.  
Tel: (727) 570-5151, Fax: (727) 570-5118, E-mail: [betti@tbrpc.org](mailto:betti@tbrpc.org) or [marsh@tbrpc.org](mailto:marsh@tbrpc.org) Web site:  
[www.tbrpc.org](http://www.tbrpc.org)

Study Managers: Betti C. Johnson, AICP, Principal Planner and Marshall Flynn, IT Manager  
Statewide Program Manager: Jeffrey Alexander, Northeast Florida Regional Council